




E-LINEKX-II

Busbar Systems 630...6300A

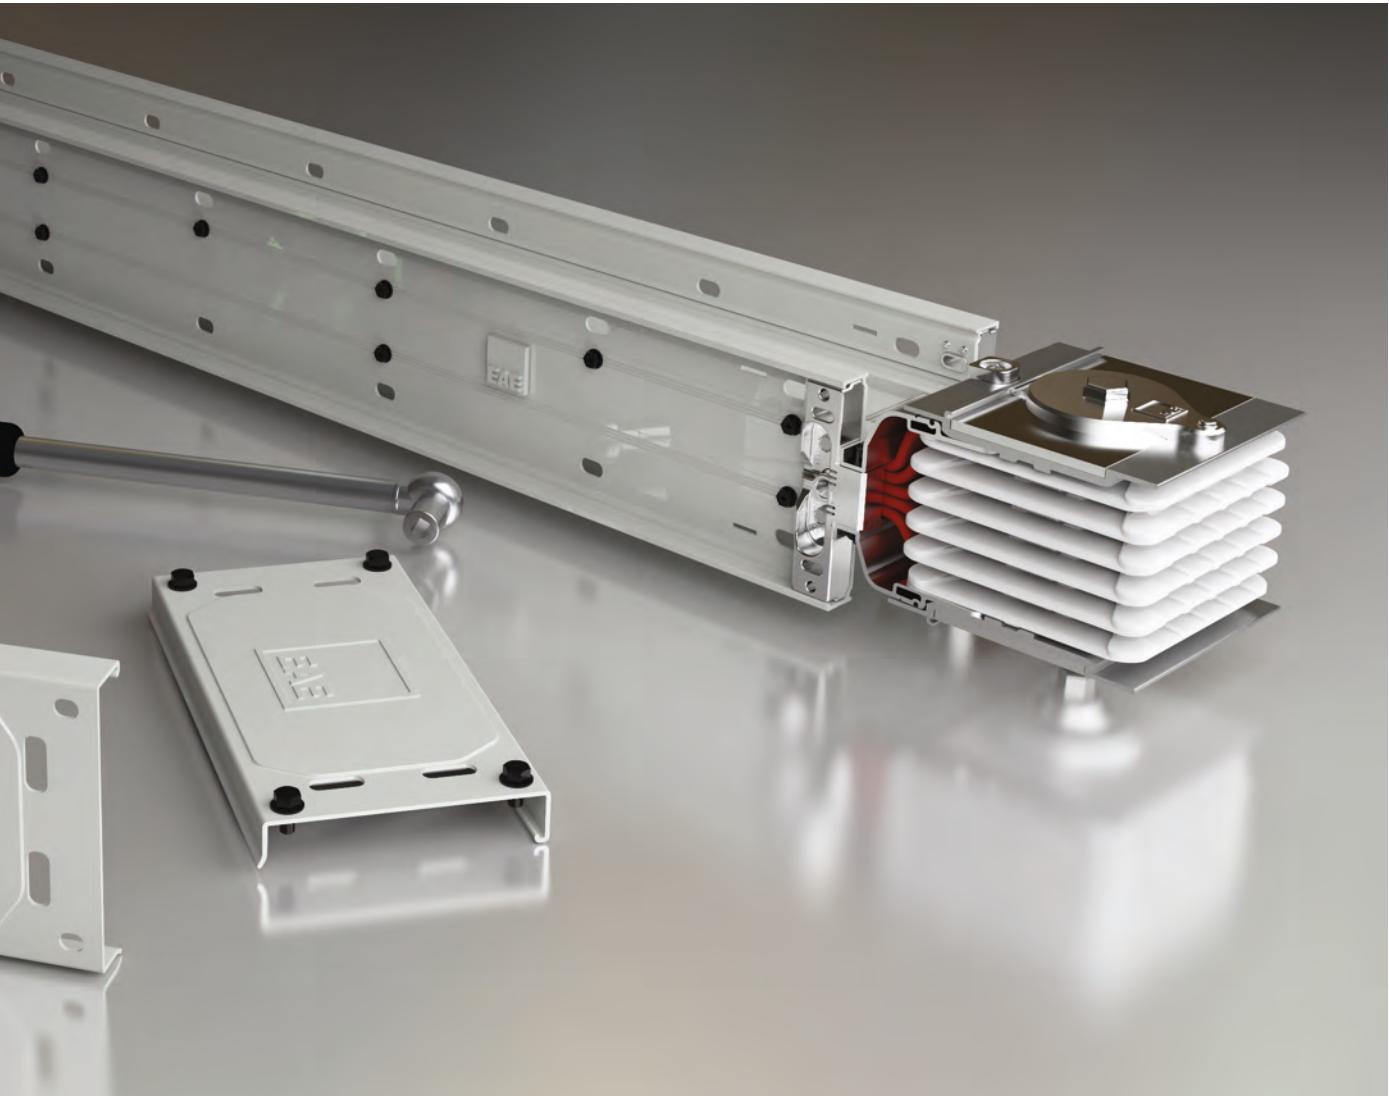


E-LINEKX-II



CONTENTS

►► E-LINE KX-II

Introduction	2-3
Distribution & Horizontal Applications	4
Riser & Vertical Applications	5
Technical Characteristics	6-9
Order Code System	10
Straight Lengths	11
Elbows	12-15
"T" Module	16
Reduction Modules	17
Expansions	18
Phase Transposition Module	19
End Closers	20
Panel Connections	21-25
Transformer Connections	26-30
Tap-off Boxes	31-36
Vertical and Horizontal Busbar Applications	37-38
Feeder Boxes	39-40
Fixing Elements	41-49
Joint Structure	50
Measuring a Special Length	51
Inserting "Make up Section"	52
Declaration	53
Certificate	54
Product Overview	55

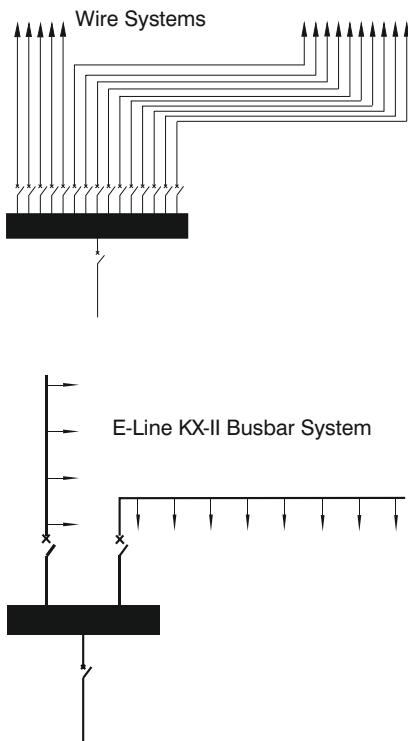

Transportation and distribution of electricity especially at high ampere ratings used to be provided by paralleling a number of large sized cables. In order to support these cables in the buildings, there were used a lot of cable trays, cable ladders, under-floor cable channels, etc. Applications of cables, such as, fixing to cable channels, branching, connecting, calculating distances between cables for heat dissipation, adjusting difference lengths, etc. need special expert workers, more time, more effort, which means more money. Even after all above difficulties and expense, the result is not efficient enough. For example, there is no flexibility in this solution.

In order to eliminate all above disadvantages, modern **BUSBAR SYSTEMS** are developed. **EAE** manufactures **E-LINE** busbar systems from 25A up to 6.300A in order to convert above disadvantages to advantages. High technological, modular structured **E-LINE** busbar systems allow users to get safe energy how much and where ever they need by tap off boxes, easy and efficient planning, short installation time, better heat dissipation, automatic length adjustments, re-design / re-using capability, better electrical characteristics, etc. **E-LINE** busbar systems are designed and certified as per IEC 61439-6 standard.

Standard Prefabricated Structure

E-Line KX-II busbar system can be adapted to any kind of building structure using. Space-saving prefabricated components. All necessary components and fitting elements are manufactured items.


* Special components can be manufactured in one week on request.

Rapid and Efficient Installation

It has been important to keep abreast with the rapidly improving building technologies in civil engineering, the installation time was we have lowered by reducing the number of bolts on the joint points of the busbar.

Flexible Power Supply

Tap-off points at short intervals make electrical power available in all locations; the power supply can be adapted to different production processes simply by relocating the tap-off unit.

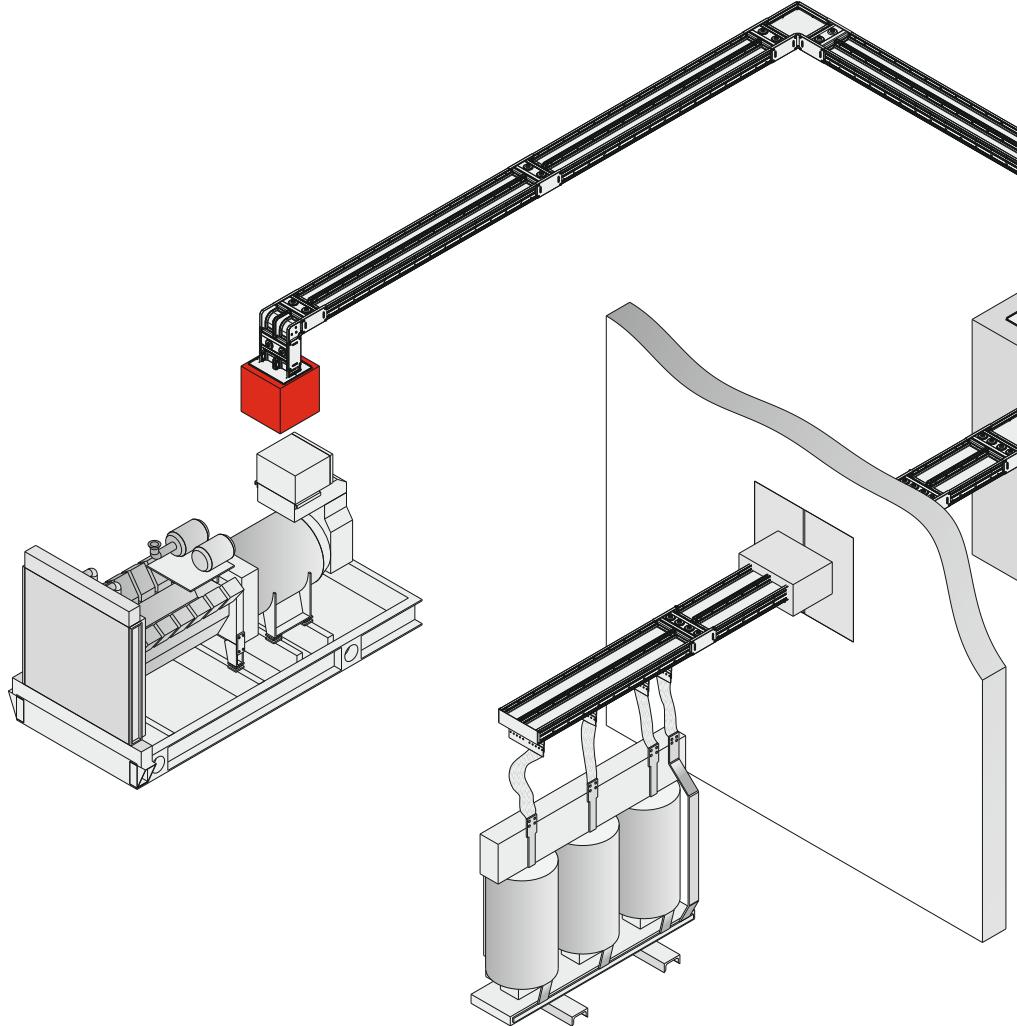

► Technical Features

Hybrid Insulation

The perfect design for high current busbar systems is the "compact structure" where tin plated and insulated with B class polyester film and epoxy coated on conductors are tightly placed into the extruded aluminium housing (Figure 1).

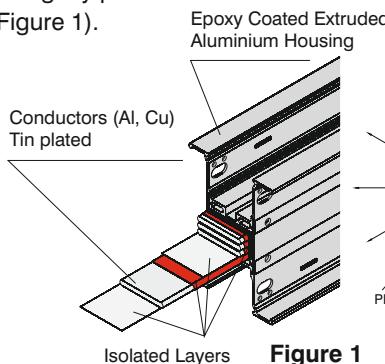


Figure 1

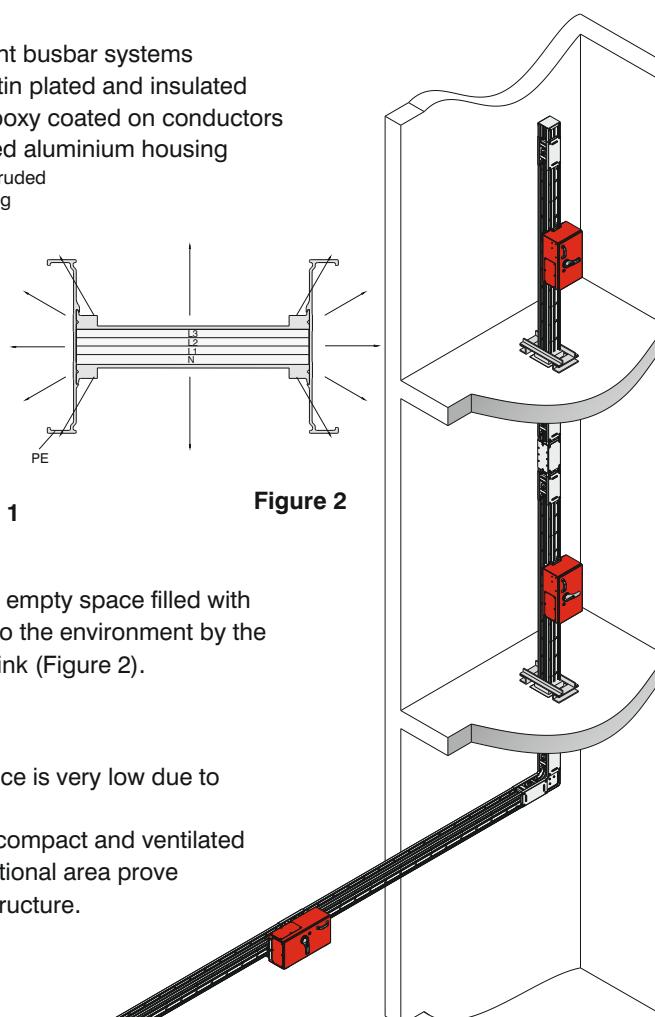


Figure 2

High Short-Circuit Endurance

As there are no support points in "compact structure" momentum levers are not formed (Figure 1). This feature ensures high short-circuit endurance (Figure 5).




Figure 5


Heat Transfer

"In compact structure" there is no empty space filled with air and heat is easily transferred to the environment by the housing that works like a heat-shink (Figure 2).

Minimum Voltage Drop

In E-Line KX-II, inductive reactance is very low due to closely placed conductors.

The voltage drop comparison of compact and ventilated busbar that have same cross sectional area prove the importance of the compact structure.

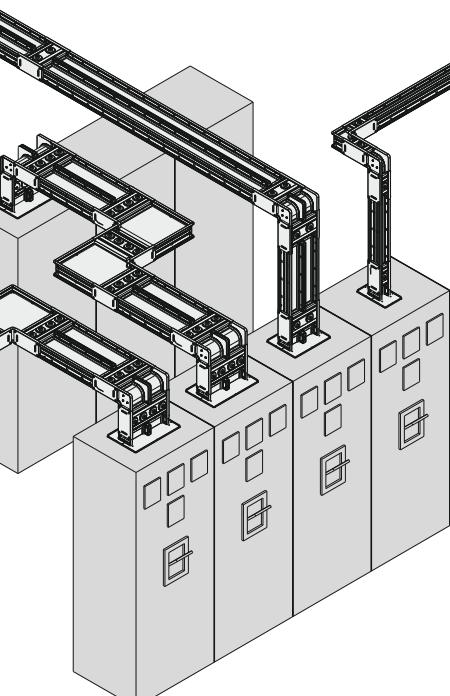

One Bolt Joint Ensures Safety and Easy Installation

E-Line KX-II Busbars are installed by tightening the "one bolt joint". Belleville spring washers on both ends of the bolt retains the original contact pressure, ensuring a more secure, reliable and maintenance - free joint.

E-Line KX-II Busbar Systems are easily installed (Figures 3-4).

* The bolt is tightened to 83 Nm (60 lbf) using the torque spanner.




Figure 3




Figure 4

Easy and Safe Installation:

Due to alignment piece on the joint point, block joint element and busbar tray are aligned. This makes installation easier and correct on the right axes. (Figure 6).



Figure 6

While designing an electrical distribution system with E-Line KX-II a few approximate details will be necessary.

- Location, number, type and approximate ratings of loads,
- Transformer rates and short-circuit capacities, Utilization factor=a,
- System coordination with other distribution system (heat, water, etc),
- Determining the route of E-Line KX-II on layout, If necessary, coordination of E-Line KX-II Busbar with E-Line KO-II runs,
- Deciding on suitable hanger types.

Utilization Factor (α)

Utilization factor (α) depends on the type and number of loads.

It is usually around 0.7 or lower. The utilization factor of a line that supplies electricity to motors and lighting systems is usually lower than 0.6.

It is as low as 0.30 in weld shops of car factories, it can be 1 in lines where only one big load is supplied.

Voltage Drop

For practical voltage drop calculation, necessary values, formula and easy calculation methods are given on the technical characteristics table on pages 6-9.

Rated Current

The current is calculated using the following equation:

$$I_B = \frac{P\alpha}{\sqrt{3} \cdot U \cdot \cos \varphi}$$

I_B = Operation current (A)

P = Installed load (W)

α = Utilization factor

U = Supply voltage (V)


- Busbar current rating is chosen as equal to or higher than the calculated I_B current.
- After the voltage drop calculation if the chosen current rate is not convenient, a higher rating is chosen.

Short-Circuit

Tested short-circuit capacities are given on technical characteristics table on pages 6-9.

Busbar Installation Plan

Our distributor's project & design departments will help you for preparing the installation plans on request.

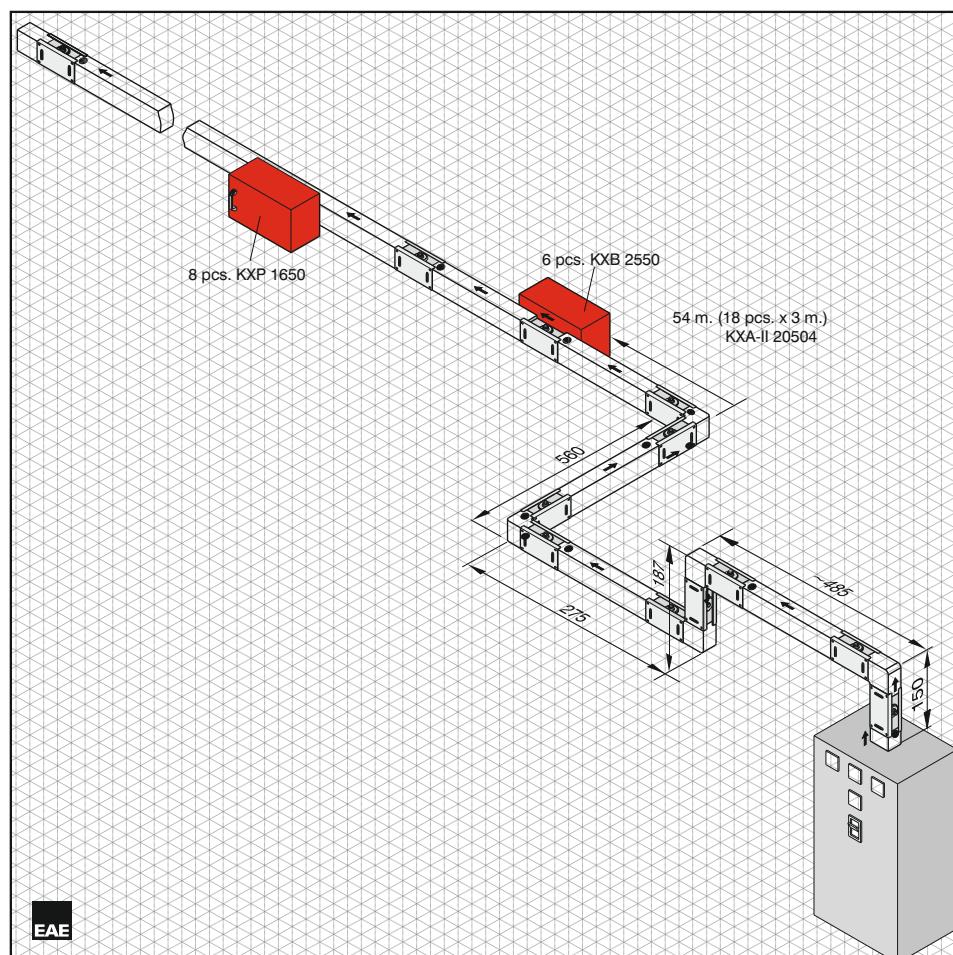

Components List			
Item	Components	Quantity	
1	KXA-II 20504 - STD	Busbar (20 x 3m.)	60 m.
2	KXA-II 20504 - D	Downwards Elbow	2 pcs.
3	KXA-II 20504 - R	Right Elbow	1 pc.
4	KXA-II 20504 - U	Upwards Elbow	1 pc.
5	KXA-II 20504 - L	Left Elbow	1 pc.
6	KXA-II 20504 - P11	Panel Connection	1 pc.
7	KXA-II 20504 - S10	End Closer	1 pc.
8	KXA-II 20504 - X95	Special Straight Length	1 pc.
8	KXA-II 20504 - X120	Special Straight Length	1 pc.
9	KXA-II 20504 - X122	Special Straight Length	1 pc.
10	KXA-II 20504 - X200	Special Straight Length	1 pc.
11	KXA-II 20504 - X174	Special Straight Length	1 pc.
12	KXP 1650	Tap-off Box	8 pcs.
13	KXB 2550	Tap-off Box	6 pcs.

Company : Demir Makine
Project : II.OSB Tesisleri
Project No : 1128


Prepared by Name : Abdullah ELDELEKLİ
Date : 02 / 01 / 2009
Signature :

Project Sample

►Riser & Vertical Applications

As each building's structure is different than the other for vertical applications of E-Line KX-II special projects has to be designed.

The details on this page briefly explain the necessary information for drawing a vertical application project.

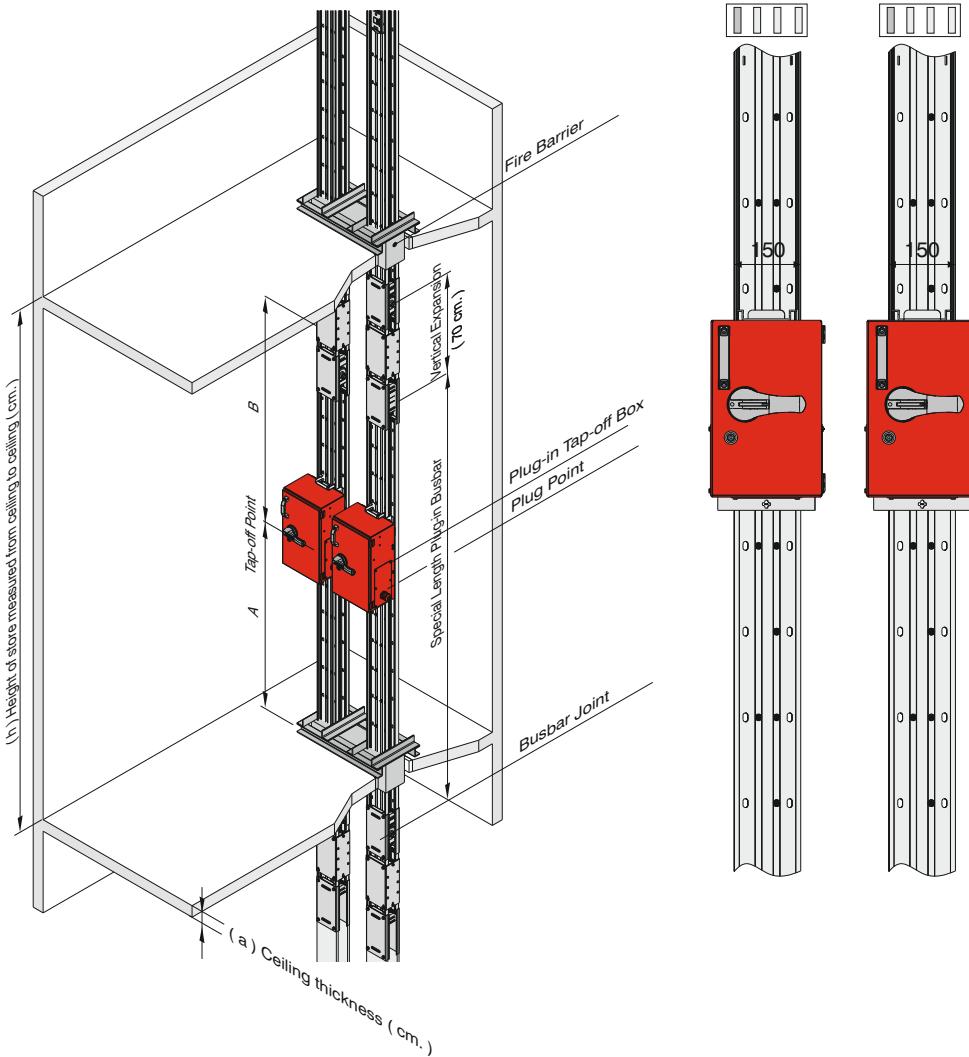

Project Design

The details below should be sent to our Project & Design department.

- Location and dimensions of the floor penetration where busbar will be installed.
- Number, height and ceiling thickness of storeys.
($a=...$, $h=...$)
- Connected load for each storey.
- Supply type of the vertical line (busbar or cable).

Please send the information to us by fax or e-mail with a sample drawing in Figure 1.

In multipath busbars in high-rise vertical shaft applications; Due to floor heights, floor thickness and product tolerances, the window or additional point alignments on the upper floors may not be the same. In order for the Tap off boxes to be aligned and the joint point not to coincide with the floor transitions, the assembly should be continued by making measurements on each floor.

■ EAE is not responsible for the potential risks that may occur in cases where the products in our catalogue are used outside of the standard phase sequences as shown in the catalogue.


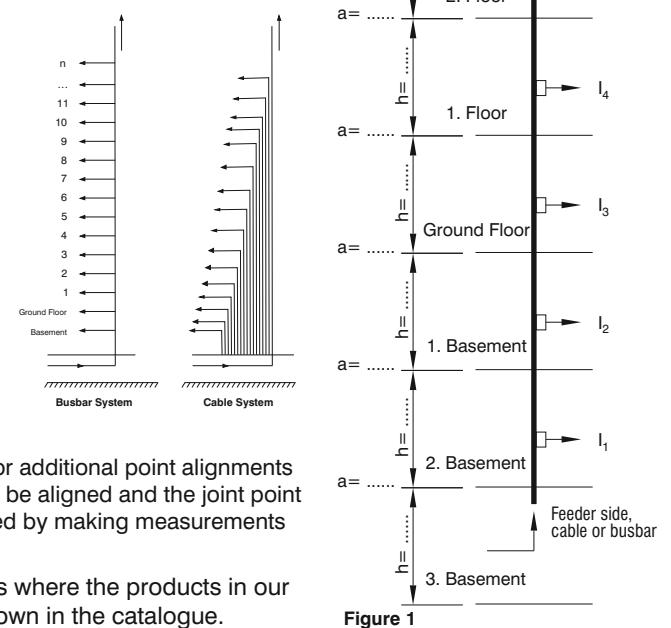


Figure 1

► Technical Characteristics

Aluminium Conductor (AC)

Standards	IEC 61439-6, TS EN 61439-6, IEC 61439-1, TS EN 61439-1															
Rated Isolation Voltage	Ui V 1000 at Cat IV															
Max. Rated Operational Voltage	Ue Vac 1000															
Rated Impulse Withstand Voltage	Uimp kV 12															
Rated Frequency	f Hz 50															
Pollution Degree	III															
Protection Degree	IP55 / IP65 / IP67															
External Mechanical Impacts (IK Code)*	Bolt-on Busbar IK10+, Plug-in Busbar IK08															
Rated Current	I _n	A	630	800	1000	1250	1600	2000	2500	2350	2500	3000	3300	4000	5000	6300
Busbar Code			06	08	10	12	17	20	27	21	25	32	33	40	51	63
Rated Short-time Withstand Current (1s)	I _{cw}	kA	25	35	35	50	70	100	100	100	100	100	100	120	120	120
Rated Peak Withstand Current	I _{pk}	kA	52,5	74	74	105	154	220	220	220	220	220	220	264	264	264
Rated Short-time Withstand Current for PE (Housing) Conductor (1s)	I _{cw}	kA	15,0	21	21	30	42	60	60	60	60	60	60	72	72	72
Rated Peak Withstand Current for PE (Housing) Conductor	I _{pk}	kA	31,5	44,1	44,1	63,0	92,4	132,0	132,0	132,0	132,0	132,0	132,0	158,4	158,4	158,4
MEAN PHASE CONDUCTOR CHARACTERISTICS AT RATED CURRENT I _n																
Resistance at a conductor temperature of 20 °C	R ₂₀	mΩ/m	0,121	0,088	0,076	0,055	0,037	0,027	0,021	0,028	0,024	0,018	0,016	0,013	0,010	0,008
Average resistance at I _n , thermal balance	R	mΩ/m	0,159	0,116	0,100	0,073	0,047	0,034	0,027	0,036	0,030	0,022	0,021	0,017	0,013	0,010
Reactance (Independent from Temperature)	X	mΩ/m	0,027	0,021	0,019	0,015	0,010	0,008	0,006	0,008	0,006	0,006	0,004	0,004	0,003	0,002
Positive and negative sequence impedances at an ambient air temperature of 35 °C	Z	mΩ/m	0,161	0,118	0,102	0,075	0,048	0,035	0,028	0,037	0,031	0,023	0,021	0,017	0,013	0,010
Positive and negative sequence impedances at a conductor temperature of 20 °C	Z ₂₀	mΩ/m	0,124	0,091	0,078	0,057	0,038	0,028	0,022	0,029	0,025	0,019	0,017	0,014	0,010	0,008
DC Resistance at a conductor temperature of 20 °C for Phases and neutral	R/ort _{Ph}	mΩ/m	0,124	0,087	0,075	0,060	0,040	0,026	0,021	0,030	0,024	0,018	0,020	0,014	0,010	0,010
DC Resistance at a conductor temperature of 20 °C for PE (Housing)	R _{PE}	mΩ/m	0,028	0,024	0,042	0,032	0,025	0,024	0,018	0,021	0,018	0,016	0,014	0,015	0,009	0,008
SECTIONS																
L1,L2,L3,N		mm ²	240	330	360	480	750	1020	1380	960	1140	1500	1680	2040	3000	3600
PE (4 ½ Conductors)		mm ²	120	165	180	240	375	510	690	480	570	750	840	1020	1500	1800
PE (5 Conductors)		mm ²	240	330	360	480	750	1020	1380	960	1140	1500	1680	2040	3000	3600
Aluminium Housing Section (Aluminium)		mm ²	1686	1788	1829	1894	2128	2379	2679	3580	3845	4068	4224	4571	5275	7128
Conductor Dimensions		mmxmm	6x40	6x55	6x60	6x80	6x125	6x170	6x230	2(6x80)	2(6x95)	2(6x125)	2(6x140)	2(6x170)	2(6x250)	3(6x200)
Busbar Weight (4 ½ Conductors)		kg/m	8,3	9,7	10,6	12	16,3	20,8	26,9	23,5	25,6	32	34,9	42,3	61,5	69
Busbar Weight (5 Conductors)		kg/m	8,6	10,2	11,1	12,8	17,5	22,4	29,0	24,9	27	34,4	37,5	45,0	68,5	74,6
MEAN FAULT-LOOP CHARACTERISTICS																
Zero-sequence Impedance																
Zero-sequence impedance at a conductor temperature of 20 °C	Z _{(0)b20phN}	mΩ/m	0,572	0,419	0,355	0,265	0,176	0,134	0,102	0,135	0,113	0,094	0,080	0,067	0,051	0,038
Zero-sequence impedance at a conductor temperature of 20 °C (Housing)	Z _{(0)b20phPE}	mΩ/m	0,326	0,268	0,194	0,151	0,110	0,102	0,075	0,085	0,073	0,065	0,054	0,056	0,036	0,030
Zero-sequence impedance at an ambient temperature of 35 °C	Z _{(0)bphN}	mΩ/m	0,742	0,540	0,480	0,356	0,229	0,173	0,134	0,179	0,148	0,121	0,106	0,088	0,066	0,049
Zero-sequence impedance at an ambient temperature of 35 °C (Housing)	Z _{(0)bphPE}	mΩ/m	0,406	0,331	0,250	0,195	0,139	0,132	0,098	0,109	0,093	0,082	0,070	0,073	0,047	0,039
Resistances and Reactances																
Resistance at a conductor temperature of 20 °C	R _{b20phph}	mΩ/m	0,249	0,184	0,156	0,114	0,074	0,055	0,043	0,044	0,048	0,038	0,034	0,027	0,020	0,015
Resistance at a conductor temperature of 20 °C	R _{b20phN}	mΩ/m	0,255	0,192	0,164	0,120	0,078	0,059	0,046	0,048	0,052	0,041	0,036	0,029	0,021	0,016
Resistance at a conductor temperature of 20 °C (Housing)	R _{b20phPE}	mΩ/m	0,175	0,137	0,106	0,081	0,057	0,048	0,037	0,038	0,031	0,028	0,026	0,017	0,014	
Resistance at an ambient air temperature of 35 °C	R _{bphph}	mΩ/m	0,328	0,241	0,216	0,157	0,098	0,073	0,059	0,057	0,064	0,050	0,046	0,037	0,026	0,020
Resistance at an ambient air temperature of 35 °C	R _{bphN}	mΩ/m	0,336	0,252	0,226	0,165	0,104	0,078	0,062	0,063	0,069	0,054	0,048	0,040	0,028	0,022
Resistance at an ambient air temperature of 35 °C (Housing)	R _{bphPE}	mΩ/m	0,231	0,180	0,146	0,111	0,075	0,064	0,050	0,051	0,041	0,038	0,035	0,023	0,019	
Reactance (Independent from temperature)	X _{bphph}	mΩ/m	0,043	0,042	0,037	0,027	0,020	0,016	0,012	0,018	0,013	0,010	0,008	0,008	0,005	0,005
Reactance (Independent from temperature)	X _{bphN}	mΩ/m	0,075	0,058	0,051	0,039	0,028	0,022	0,017	0,025	0,018	0,015	0,012	0,008	0,008	0,007
Reactance (Independent from temperature)	X _{bphPE}	mΩ/m	0,069	0,061	0,046	0,034	0,024	0,018	0,014	0,021	0,015	0,012	0,011	0,009	0,006	0,005



Voltage Drop Calculation

Generally Voltage drop of a busbar system can be calculated with the following formula.


$$\Delta U = \sqrt{3} \cdot L \cdot I \cdot (R \cdot \cos\phi + X \cdot \sin\phi) \cdot 10^{-3} [V]$$

ΔU = Voltage Drop (V)

| = Line Length (m)

I = Line Current or Load (A)

R = Resistance ($\text{m}\Omega/\text{m}$)



S = Supply Point


- All phase conductor characteristics had been determined according to Annex BB of IEC / EN 61439-6.
 - Fault-loop zero-sequences impedances had been determined according to Annex CC of IEC / EN 61439-6.
 - Fault-loop resistances and impedances had been determined according to Annex DD of IEC / EN 61439-6

* IK10 corresponds to impact energy of 20J according to IEC 62262.

► Technical Characteristics

Copper Conductor (Cu)

Standards																				
Rated Isolation Voltage																				
U _i V 1000 at Cat IV																				
Max. Rated Operational Voltage																				
U _e Vac 1000																				
Rated Impulse Withstand Voltage																				
U _{imp} kV 12																				
Rated Frequency																				
f Hz 50																				
Pollution Degree																				
III																				
Protection Degree																				
IP55 / IP65 / IP67																				
External Mechanical Impacts (IK Code)*																				
Bolt-on Busbar IK10+, Plug-in Busbar IK08																				
Rated Current		I _n	A	650	800	1000	1250	1350	1600	2000	2250	2500	2250	2750	3000	3300	3600	4000	5000	6300
Busbar Code				06	08	10	12	14	16	20	21	25	24	28	30	32	36	40	50	63
Rated Short-time Withstand Current (1s)		I _{cw}	kA	24	50*	50	60	75	85	100	100	100	110	110	150	180	180	180	180	180
Rated Peak Withstand Current		I _{pk}	kA	50,4	105	105	132	165	187	220	220	220	242	242	330	396	396	396	396	396
Rated Short-time Withstand Current for PE (Housing) Conductor (1s)		I _{cw}	kA	14,4	30	30	36	45	51	60	60	66	66	90	108	108	108	108	108	108
Rated Peak Withstand Current for PE (Housing) Conductor		I _{pk}	kA	28,8	63	63	75,6	94,5	112	132	132	145	145	198	238	238	238	238	238	238
MEAN PHASE CONDUCTOR CHARACTERISTICS AT RATED CURRENT I _n																				
Resistance at a conductor temperature of 20 °C		R ₂₀	mΩ/m	0,113	0,093	0,061	0,051	0,040	0,034	0,025	0,022	0,018	0,026	0,021	0,017	0,014	0,013	0,011	0,009	0,006
Average resistance at I _n , thermal balance		R	mΩ/m	0,149	0,127	0,085	0,070	0,053	0,046	0,034	0,029	0,023	0,034	0,028	0,023	0,019	0,017	0,015	0,012	0,007
Reactance (Independent from Temperature)		X	mΩ/m	0,039	0,034	0,027	0,020	0,017	0,014	0,010	0,010	0,008	0,010	0,008	0,007	0,007	0,006	0,005	0,004	0,003
Positive and negative sequence impedances at an ambient air temperature of 35 °C		Z	mΩ/m	0,154	0,131	0,089	0,073	0,056	0,048	0,035	0,031	0,024	0,035	0,029	0,024	0,020	0,018	0,016	0,013	0,008
Positive and negative sequence impedances at a conductor temperature of 20 °C		Z ₂₀	mΩ/m	0,123	0,100	0,077	0,056	0,044	0,038	0,028	0,025	0,020	0,028	0,023	0,019	0,016	0,015	0,013	0,010	0,007
DC Resistance at a conductor temperature of 20 °C for Phases and neutral		R _{ortph}	mΩ/m	0,113	0,093	0,070	0,051	0,040	0,034	0,025	0,022	0,018	0,026	0,019	0,017	0,014	0,013	0,011	0,009	0,006
DC Resistance at a conductor temperature of 20 °C for PE (Housing)		R _{PE}	mΩ/m	0,054	0,049	0,040	0,031	0,028	0,025	0,018	0,019	0,016	0,017	0,017	0,016	0,012	0,011	0,009	0,006	0,006
SECTIONS																				
L1,L2,L3,N			mm ²	150	180	270	330	420	480	660	750	960	660	840	960	1140	1320	1500	1920	2880
PE (4 ½ Conductors)			mm ²	75	90	135	165	210	240	330	375	480	330	420	480	570	660	750	960	1440
PE (5 Conductors)			mm ²	150	180	270	330	420	480	660	750	960	660	840	960	1140	1320	1500	1920	2880
Aluminium Housing Section (Aluminium)			mm ²	1449	1509	1741	1788	1842	1894	2050	2128	2314	3340	3580	3780	3845	3912	4068	4411	6725
Conductor Dimensions			mmxmm	6x25	6x30	6x45	6x55	6x70	6x80	6x110	6x125	6x160	2(6x55)	2(6x70)	2(6x80)	2(6x95)	2(6x110)	2(6x125)	2(6x160)	3(6x160)
Busbar Weight (4 ½ Conductors)			kg/m	11,4	12,8	17,5	19,9	23,9	26,8	35,1	39,7	48,9	38,9	47,8	52,9	62,2	69,5	78	97,3	146
Busbar Weight (5 Conductors)			kg/m	12,2	13,52	18,9	21,5	26,1	29,2	38,5	43,8	54,1	42,4	52,0	57,9	68	76,5	85,8	107,5	161
MEAN FAULT-LOOP CHARACTERISTICS																				
Zero-sequence Impedance																				
Zero-sequence impedance at a conductor temperature of 20 °C		Z _{(0)b20phN}	mΩ/m	0,558	0,470	0,370	0,266	0,214	0,186	0,112										

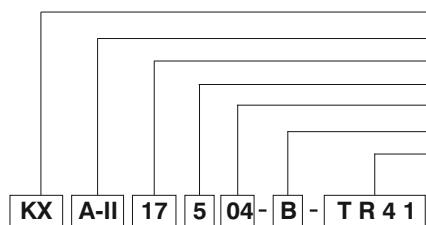

BUSBAR TYPE
CONDUCTOR MATERIAL
BUSBAR CODE
PROTECTION DEGREE
CONDUCTOR CONFIGURATION
UTILIZATION TYPE P - Plug-in / B - Bolt-on
COMPONENT

COMPONENTS

Standard Length STD
Special Length X

Upwards Elbow U
Downwards Elbow D
Right Elbow R
Left Elbow L

Left Horizontal Offset LH
Right Horizontal Offset RH
Upwards Vertical Offset UV
Downwards Vertical Offset DV
Upwards Left Combined Offset KUL
Upwards Right Combined Offset KUR
Downwards Left Combined Offset KDL
Downwards Right Combined Offset KDR
Left Upwards Combined Offset KLU
Right Upwards Combined Offset KRU
Left Downwards Combined Offset KLD
Right Downwards Combined Offset KRD

End Closer S
Reduction RD

Left Side Feeder "T" TYL
Right Side Feeder "T" TYR
Central Feeder "T" TO

Horizontal Expansion YDT
Vertical Expansion DDT
Phase Transposition Module FDM

Panel Connection P10
Panel Connection P11
Upwards Panel Connection PU20
Upwards Panel Connection PU21
Downwards Panel Connection PD20
Downwards Panel Connection PD21
Right Panel Connection PR30
Right Panel Connection PR31
Left Panel Connection PL30
Left Panel Connection PL31
Panel Connection P40
Panel Connection P41

Transformer Connection TR11
Upwards Transformer Connection TU21
Downwards Transformer Connection TD21
Transformer Connection TR31
Transformer Connection TR41
Right Transformer Connection TR51
Left Transformer Connection TL51
Transformer Connection TR61
Transformer Connection TR71

Feeder Box B10
Feeder Box B11
Central Feeder Box BO

Flexible F

Busbar Type

Aluminium (Al) A-II
Copper (Cu) C-II

CONDUCTOR MATERIAL

KXA-II Al Conductor	KXC-II Cu Conductor	Conductor Size	
Rated Current	Busbar Code	Rated Current	Busbar Code
-	-	* 650	06
-	-	* 800	08
* 630	06	-	-
-	-	* 1000	10
* 800	08	* 1250	12
1000	10	-	-
-	-	1350	14
1250	12	1600	16
-	-	2000	20
1600	17	2250	21
-	-	2500	25
2000	20	-	-
2500	27	-	-
-	-	2250	24
-	-	2750	28
2350	21	3000	30
2500	25	3300	32
-	-	3600	36
3000	32	4000	40
3300	33	-	-
-	-	5000	50
4000	40	-	-
5000	51	-	-
-	-	6300	63
6300	63	-	-

IP55 / IP65* 5 PROTECTION DEGREE
IP67 6

*Please call us for IP65 orders.

IP65 and IP67 are not recommended for outdoor applications. Please check CR catalog.

Number of Conductors	Code	Conductor Configuration									
		L1	L2	L3	N1	N2	PE	½ PE	CPE	½ CPE	PE (Housing)
4 ½ Conductors	07	✓	✓	✓	✓			✓			✓
5 Conductors	05	✓	✓	✓	✓			✓			✓
6 Conductors	06	✓	✓	✓	✓	✓			✓		✓

*TYPE Utilization Type

(B) Bolt-on	Energy is supplied from the joints.
(P) Plug-in	Energy is supplied from the joints and the plug-in points.

► Standard Straight Length

Bolt-on




Electrical energy up to 1000 A can be supplied from the joints of bolt-on type by bolt-on tap-off boxes.

Note:

Busbar energy should be turned off, before installing bolt-on type tap-off boxes.

Plug-in

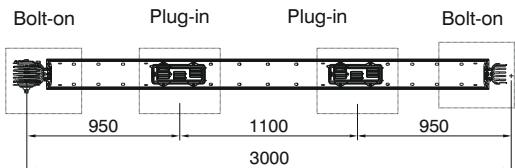


Electrical energy up to 1000 A can be supplied from the joints and up to 630 A can be supplied from the plus.

Note:

Please, determine number and side of plug-in points (single or double side).

Table For Outer Dimension of Busbars

KXA-II AI Conductor		KXC-II Cu Conductor		A
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)
-	-	* 650	06	77,5
-	-	* 800	08	82,5
* 630	06	-	-	91
-	-	* 1000	10	96
* 800	08	* 1250	12	106
1000	10	-	-	111
-	-	1350	14	121
1250	12	1600	16	131
-	-	2000	20	161
1600	17	2250	21	176
-	-	2500	25	211
2000	20	-	-	221
2500	27	-	-	281
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150
				A
				150

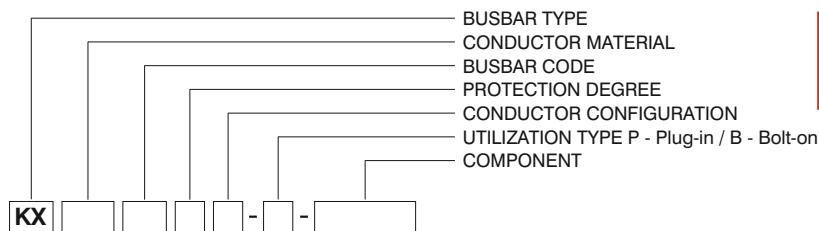


Upwards Elbow - U

Sample Order:

3300 A, Copper, Bolt-on, IP 55,
4 ½ conductors

KXC-II 32507 - B - U

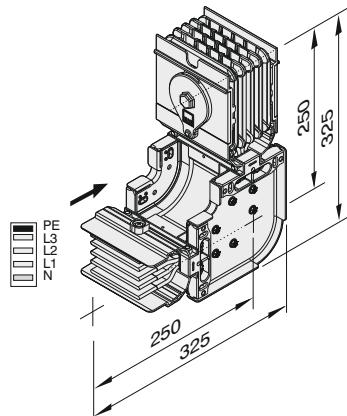


Downwards Elbow - D

Sample Order:

3300 A, Copper, Bolt-on, IP 55,
4 ½ conductors

KXC-II 32507 - B - D

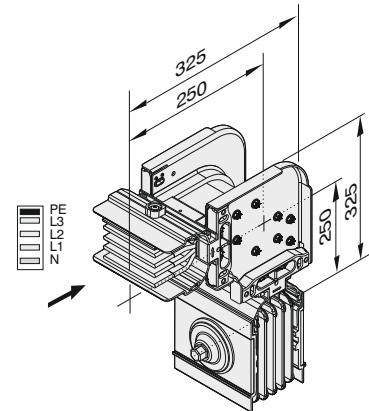


Left Elbow - L

Sample Order:

2000 A, Copper, Bolt-on, IP 55,
4 ½ conductors

KXC-II 20507 - B - L

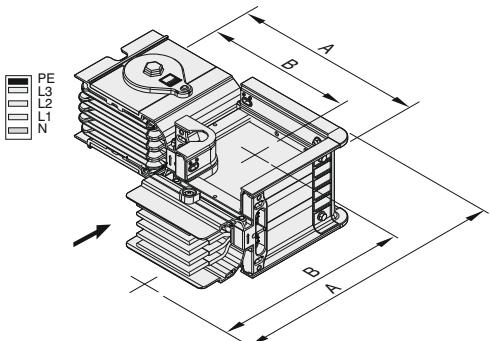


Right Elbow - R

Sample Order:


2000 A, Copper, Bolt-on, IP 55,
4 ½ conductors

KXC-II 20507 - B - R

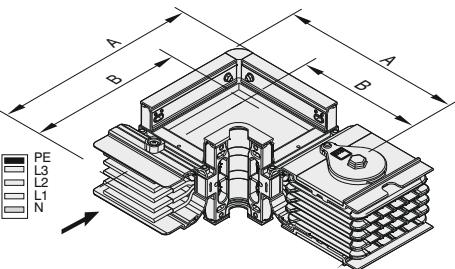

■ Special left or right elbows between 90° and 180° can be manufactured upon request.

■ The dimensions given above are minimum values. ■ Please call us for non-standard components.

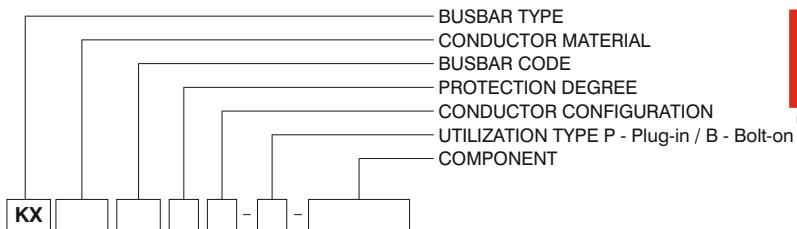

Left Horizontal Offset - LH

Sample Order:

X=60 cm, 3300 A, Copper
Bolton, IP 55, 4 ½ conductors

KXC-II 32507-B-LH60

Note:

X=min:28 cm,
max: *Please see table.
Used,if two horizontal elbows
can not fit.

- LH





- LH

- RH

- RH

- UV

- DV

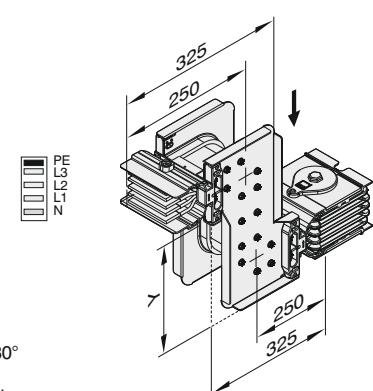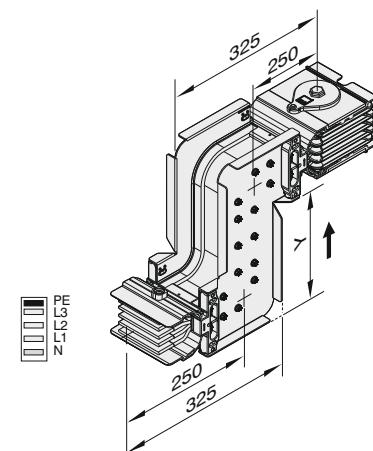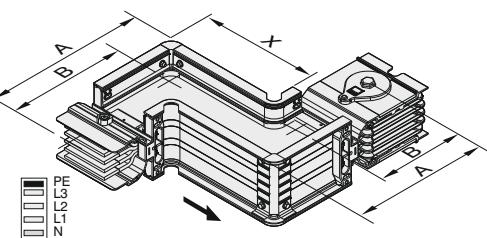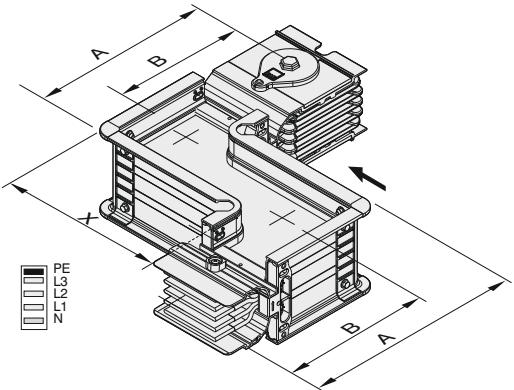

KXA-II Al Conductor		KXC-II Cu Conductor		A	B	X _{max}
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	(mm)
-	-	650	06	252	214	427
-	-	800	08	257	216	432
630	06	-	-	267	222	442
-	-	1000	10	272	224	447
800	08	1250	12	282	229	457
1000	10	-	-	287	232	462
-	-	1350	14	297	236	472
1250	12	1600	16	307	241	482
-	-	2000	20	337	256	512
1600	17	2250	21	352	264	527
-	-	2500	25	387	281	562
2000	20	-	-	397	286	572
2500	27	-	-	457	316	632
-	-	2250	24	377	276	552
-	-	2750	28	407	291	582
2350	21	3000	30	427	301	602
2500	25	3300	32	457	316	632
-	-	3600	36	487	331	662
3000	32	4000	40	517	346	692
3300	33	-	-	547	361	722
-	-	5000	50	587	381	762
4000	40	-	-	607	391	782
5000	51	-	-	767	471	942
-	-	6300	63	787	481	962
6300	63	-	-	907	541	1082

Sample Order:

Y=25 cm, 2000 A, Copper
Bolt-on, IP 55, 4 ½ conductors

KXC-II 20507-B-UV25

Note:

Y=min:25 cm max:49 cm

Upwards Vertical Offset

Sample Order:

Y=25 cm, 2000 A, Copper
Bolt-on, IP 55, 4 ½ conductors

KXC-II 20507-B-DV25

Note:

Y=min:25 cm max:49 cm

Downwards Vertical Offset

Sample Order:

Y=25 cm, 2000 A, Copper
Bolt-on, IP 55, 4 ½ conductors


KXC-II 20507-B-DV25

Note:

Y=min:25 cm max:49 cm

- Special left or right offsets between 90° and 180° can be manufactured upon request.
- The dimensions given above are minimum values.

■ Please call us for non-standard components.

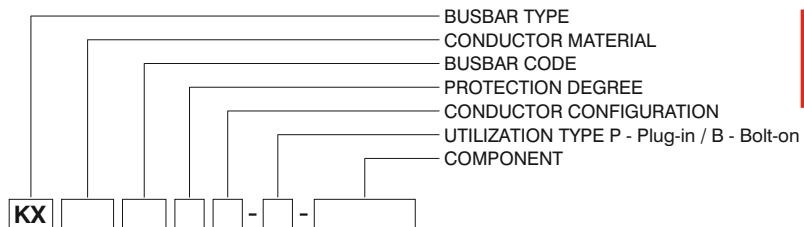

Upwards Left Combined Offset - K U L


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4 ½ conductors

KXC-II 32507 - B - KUL

Note:

Y=min. 30 cm

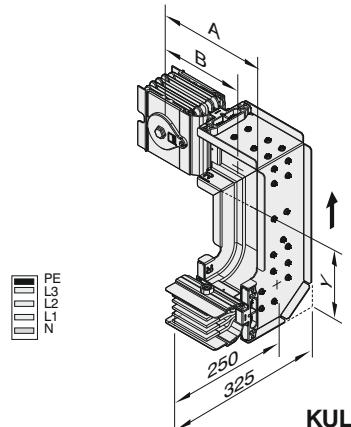

Upwards Right Combined Offset - K U R


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4 ½ conductors

KXC-II 32507 - B - KUR

Note:

Y=min. 30 cm

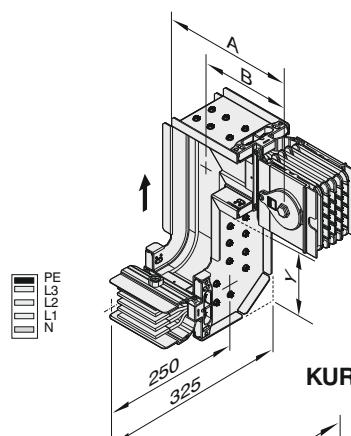

Downwards Left Combined Offset - K D L


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4 ½ conductors

KXC-II 32507 - B - KDL

Note:

Y=min. 30 cm

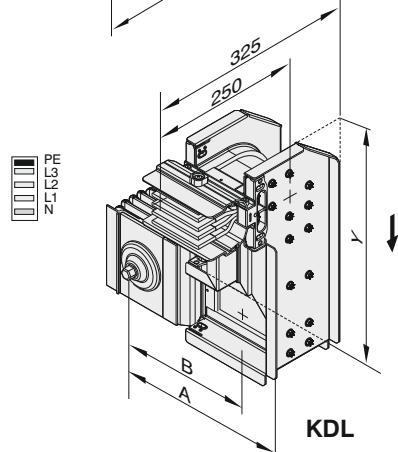

Downwards Right Combined Offset - K D R


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4 ½ conductors


KXC-II 32507 - B - KDR

Note:

Y=min. 30 cm

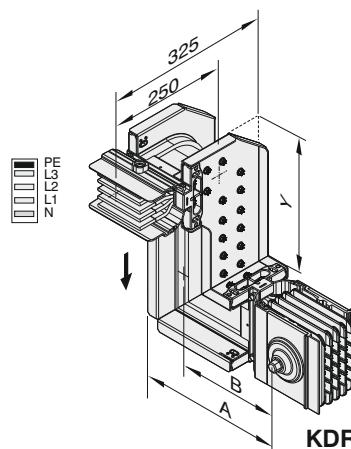

- Please call us for non-standard components.
- The dimensions given above are minimum values.

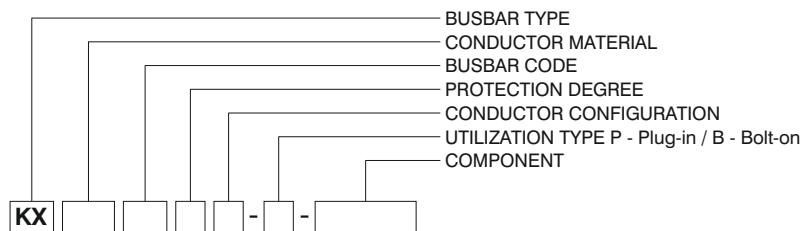

Left Upwards Combined Offset - K L U


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4½ conductors

KXC-II 32507 - B - KLU

Note:

Y = min. 30 cm

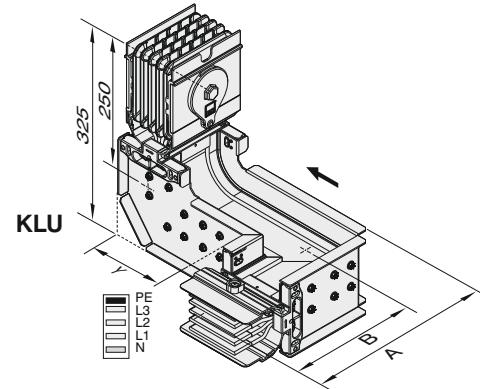

Right Upwards Combined Offset - K R U


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4½ conductors

KXC-II 32507 - B - KRU

Note:

Y = min. 30 cm

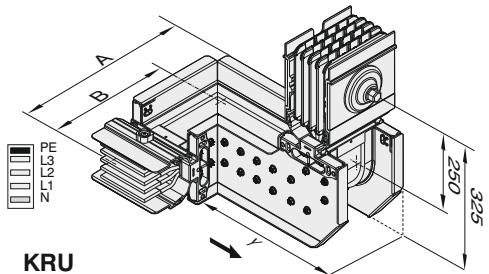

Left Downwards Combined Offset - K L D


Sample Order:

3200 A, Copper
Bolt-on, IP 55, 4½ conductors

KXC-II 33507 - B - KLD

Note:

Y = min. 30 cm

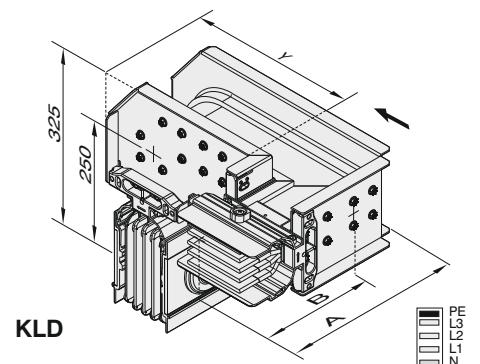

Right Downwards Combined Offset - K R D


Sample Order:

3300 A, Copper
Bolt-on, IP 55, 4½ conductors



KXC-II 32507 - B - KRD

Note:

Y = min. 30 cm

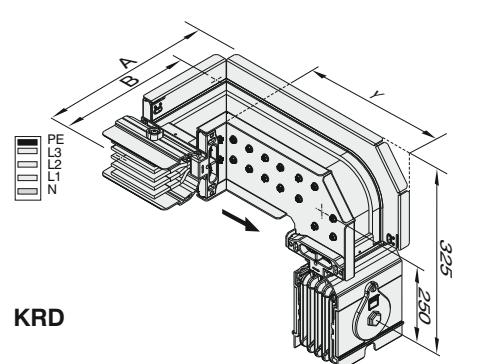

- Please call us for non-standard components.
- The dimensions given above are minimum values.

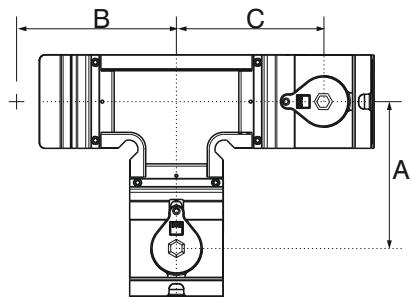
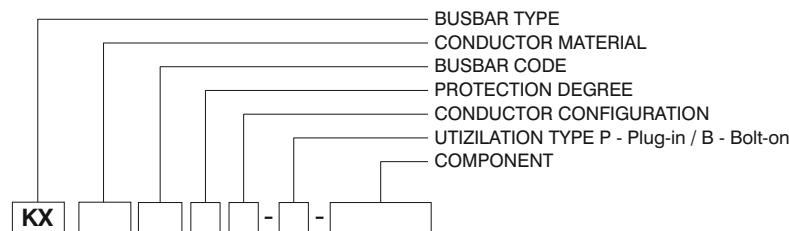


Right Side Feeder "T" - T Y R

Sample Order:

2500 A, Copper, Bolt-on,
IP 55, 4 ½ conductors

KXC-II 25507 - B - TYR

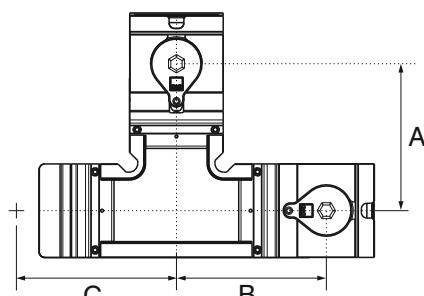
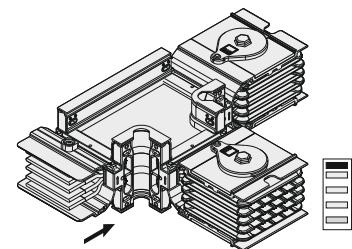


Right Side Feeder "T" - T Y L

Sample Order:

2500 A, Copper, Bolt-on,
IP 55, 4 conductors

KXA 25504 - B - TYL

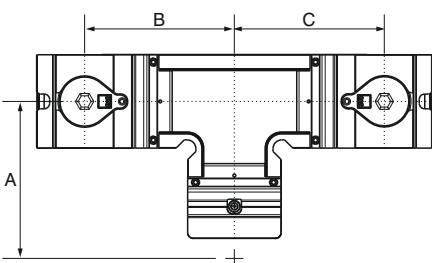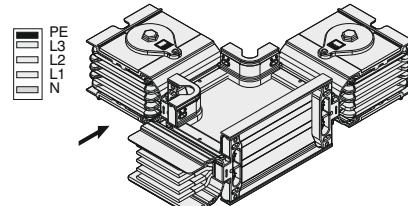


Central Feeder "T" - T O

Sample Order:

3300 A, Copper, Bolt-on,
IP 55, 4 ½ conductors

KXC-II 32507 - B - TO

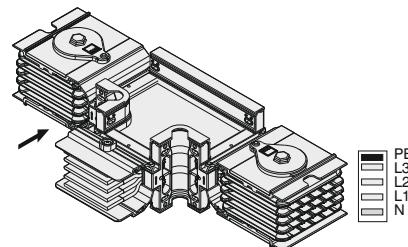

KXA-II Al Conductors		KXC-II Cu Conductors		A	B	C
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	(mm)
-	-	650	06	214	214	214
-	-	800	08	216	216	216
630	06	-	-	222	222	222
-	-	1000	10	224	224	224
800	08	1250	12	229	229	229
1000	10	-	-	232	232	232
-	-	1350	14	236	236	236
1250	12	1600	16	241	241	241
-	-	2000	20	256	256	256
1600	17	2250	21	264	264	264
-	-	2500	25	281	281	281
2000	20	-	-	286	286	286
2500	27	-	-	316	316	316
-	-	2250	24	276	276	276
-	-	2750	28	291	291	291
2350	21	3000	30	301	301	301
2500	25	3300	32	316	316	316
-	-	3600	36	331	331	331
3000	32	4000	40	346	346	346
3300	33	-	-	361	361	361
-	-	5000	50	381	381	381
4000	40	-	-	391	391	391
5000	51	-	-	471	471	471
-	-	6300	63	481	481	481
6300	63	-	-	541	541	541

■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

Reduction

Is used to change the busbar cross section.


NOTE:

Decisions and selection of reduction module and protection on lower side is under the customer's responsibility.

Reducers Table

Rated Current	Reduced Busbar Current												
	06	08	10	12	17	20	27	21	25	32	33	40	51
800	✓	-	-	-	-	-	-	-	-	-	-	-	-
1000	✓	✓	-	-	-	-	-	-	-	-	-	-	-
1250	-	✓	✓	-	-	-	-	-	-	-	-	-	-
1600	-	-	✓	✓	-	-	-	-	-	-	-	-	-
2000	-	-	-	-	✓	✓	-	-	-	-	-	-	-
2500	-	-	-	-	-	✓	✓	-	-	-	-	-	-
2350	-	-	-	-	✓	✓	-	-	-	-	-	-	-
2500	-	-	-	-	-	✓	-	✓	-	-	-	-	-
3000	-	-	-	-	-	-	✓	✓	✓	-	-	-	-
3300	-	-	-	-	-	-	✓	-	✓	✓	-	-	-
4000	-	-	-	-	-	-	-	-	✓	✓	-	-	-
5000	-	-	-	-	-	-	-	-	-	✓	✓	-	-
6300	-	-	-	-	-	-	-	-	-	-	✓	✓	-

2

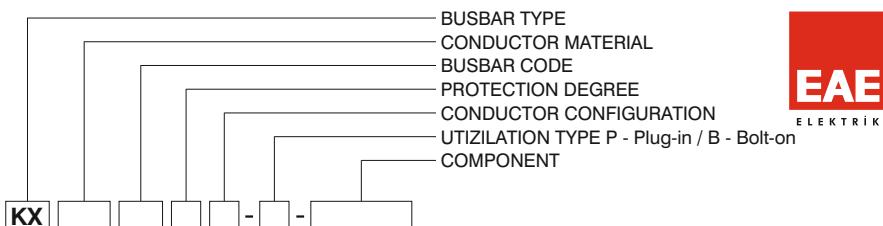

Reduction

Sample Order:


2000A / 1600A, Copper, Bolt-on, IP 55, 4 ½ conductors

KXC-II 20507 - B - RD16

- RD



Reduced Busbar Current

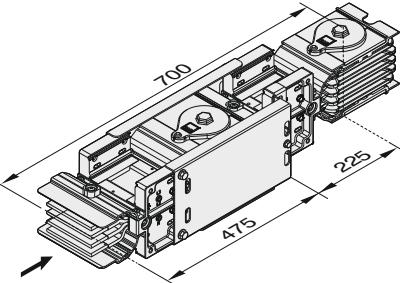


KXC-II Cu Conductor

Rated Current	06	08	10	12	14	16	20	21	25	24	28	30	32	36	40	50
800	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1250	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
1350	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
1600	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-
2000	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-
2250	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-
2500	-	-	-	-	-	-	✓	✓	✓	✓	-	✓	-	-	-	-
2250	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
2750	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	-
3000	-	-	-	-	-	-	-	-	✓	-	✓	-	-	-	-	-
3300	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-
3600	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-
4000	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-
5000	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-
6300	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-

2

See table below for ratings and busbar codes.

KXA-II AI Conductor		KXC-II Cu Conductor		A	B	C
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	(mm)
-	-	650	06	214	214	214
-	-	800	08	216	216	216
630	06	-	-	222	222	222
-	-	1000	10	224	224	224
800	08	1250	12	229	229	229
1000	10	-	-	232	232	232
-	-	1350	14	236	236	236
1250	12	1600	16	241	241	241
-	-	2000	20	256	256	256
1600	17	2250	21	264	264	264
-	-	2500	25	281	281	281
2000	20	-	-	286	286	286
2500	27	-	-	316	316	316
-	-	2250	24	276	276	276
-	-	2750	28	291	291	291
2350	21	3000	30	301	301	301
2500	25	3300	32	316	316	316
-	-	3600	36	331	331	331
3000	32	4000	40	346	346	346
3300	33	-	-	361	361	361
-	-	5000	50	381	381	381
4000	40	-	-	391	391	391
5000	51	-	-	471	471	471
-	-	6300	63	481	481	481
6300	63	-	-	541	541	541

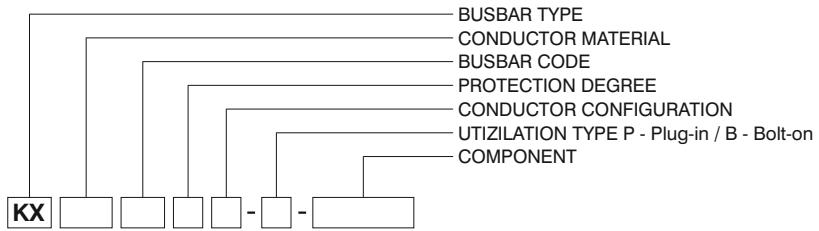

Vertical Expansion

Used for vertical applications in multi storey buildings.


- One vertical expansion unit is advised to be used at every floor between fixed support points.

Vertical Expansion

Sample Order:

2000 A, Copper, Bolt-on, IP 55
4½ conductors

KXC-II 20507 - B - DDT

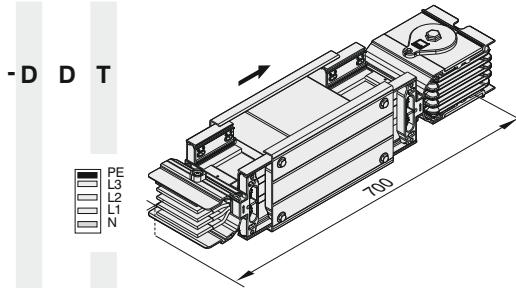

Horizontal Expansion

Used at every 40m in long horizontal straight lines and building expansion points.

Note: 1) Horizontal expansion joint should be utilised if busbar line is crossing to adjacent through building expansion joints.

2) This module is used on the long busbar line (>75m.) where line is ended by end closure and is not fixed on the support rigidly.

3) Horizontal expansion joint has sufficient movement span of 54mm.


EAE requests to be consulted during design stage.

Horizontal Expansion

Sample Order:


2500 A, Copper, Bolt-on,
IP 55, 4½ conductors

KXC-II 25507 - B - YDT

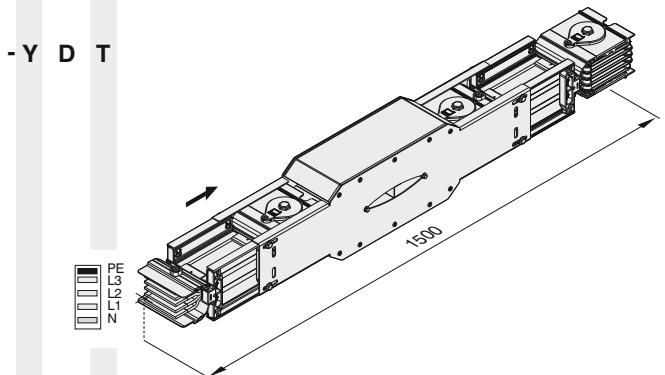

Attention!


The total length of the module should be adjusted to 1500 mm. after installation.

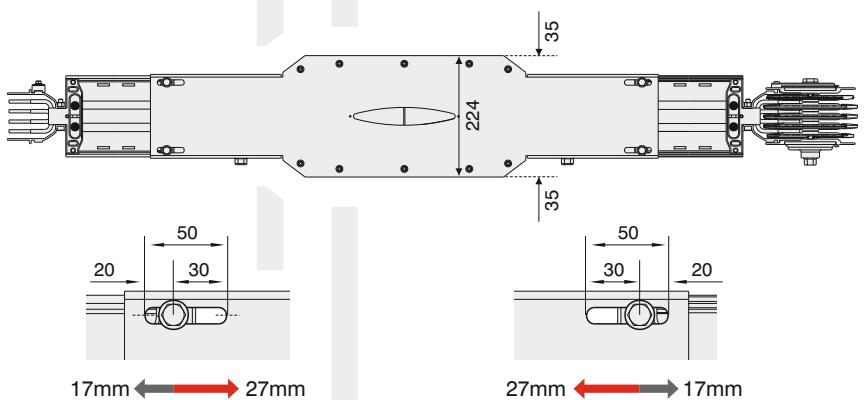

►Phase Transposition Module

Phase Transposition Module

They used for transposition of phase sequence.

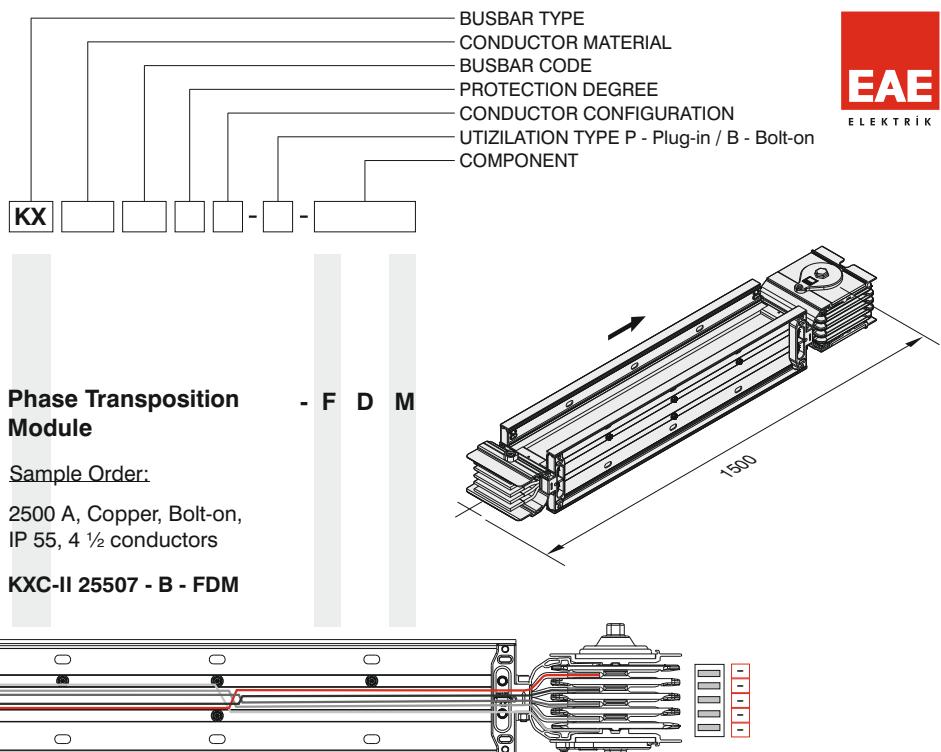

! After the Phase Transposition Module; when the Tap-Off boxes needed to be installed. An approval from the customer representative is required.

FDM Dimension Table

KXA-II Al Conductor		KXC-II Cu Conductor		A
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)
-	-	650	06	77,5
-	-	800	08	82,5
630	06	-	-	91
-	-	1000	10	96
800	08	1250	12	106
1000	10	-	-	111
-	-	1350	14	121
1250	12	1600	16	131
-	-	2000	20	161
1600	17	2250	21	176
-	-	2500	25	211
2000	20	-	-	221
2500	27	-	-	281
-	-	2250	24	202
-	-	2750	28	232
2350	21	3000	30	252
2500	25	3300	32	282
-	-	3600	36	312
3000	32	4000	40	342
3300	33	-	-	372
-	-	5000	50	412
4000	40	-	-	432
5000	51	-	-	592
-	-	6300	63	612
6300	63	-	-	732

Figure 1


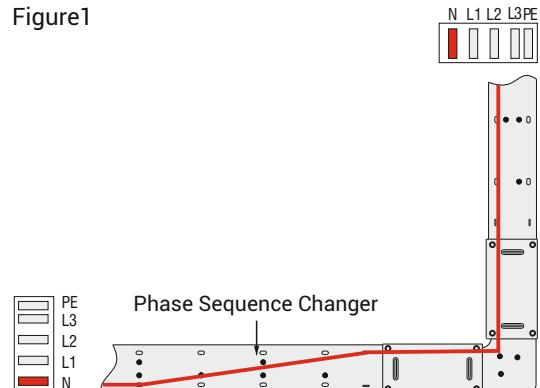


Figure 2

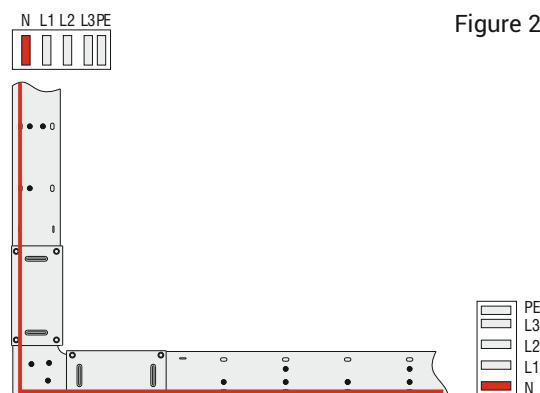

Vertical Shaft Application


- The neutral bar of KX busbar shall be at the bottom for horizontal busbar lines and on the left for vertical busbar lines. (Figure 1)
- In order to maintain the neutral bar at the bottom and in the vertical busbar on the left, it is required to use the phase changing module. (Figure 2)

End Closer

Is used to close the end of busbar run.

KXA-II AI Conductors	KXC-II Cu Conductors	L1, L2, L3, N, ½ PE+Housing 07			
Rated Current	Busbar Code	Rated Current	Busbar Code	Dimensions (mm)	Order Code
- -		650	06	6x25	3066129
- -		800	08	6x30	3066131
630	06	-	-	6x40	3016698
- -		1000	10	6x45	3141273
800	08	1250	12	6x55	3016699
1000	10	-	-	6x60	3142393
- -		1350	14	6x70	3016700
1250	12	1600	16	6x80	3016701
- -		2000	20	6x110	3016702
1600	17	2250	21	6x125	3016703
- -		2500	25	6x160	3016705
2000	20	-	-	6x170	3142394
2500	27	-	-	6x230	3142395
- -		2250	24	2(6x55)	3016707
- -		2750	28	2(6x70)	3127358
2350	21	3000	30	2(6x80)	3016706
2500	25	3300	32	2(6x95)	3135702
- -		3600	36	2(6x110)	3016709
3000	32	4000	40	2(6x125)	3016711
3300	33	-	-	2(6x140)	3016712
- -		5000	50	2(6x160)	3016713
4000	40	-	-	2(6x170)	3142439
5000	51	-	-	2(6x250)	3127359
- -		6300	63	3(6x160)	3135704
6300	63	-	-	3(6x200)	3113537

Note: S10 or S11 modules should be used as end closer for the busbars with 08, 09, 06 codes and for all IP67 products.

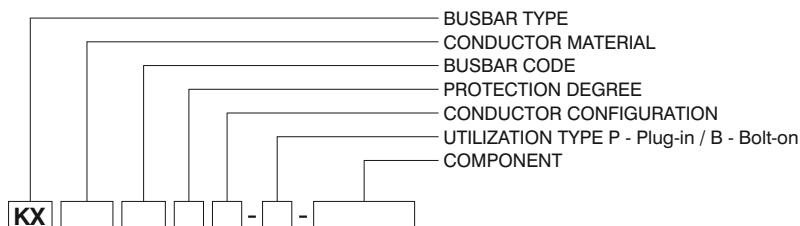


End Closer

- S

Sample Order:

2500 A, Copper
Bolt-on, IP 55, 4½ conductors

KX-II 25 - B - S

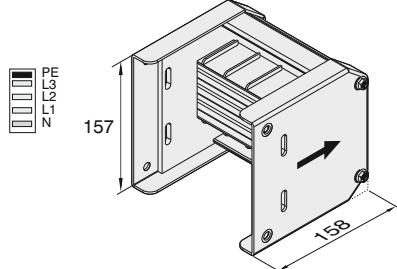


End Closer

- S 10

Sample Order:

6300 A, Copper
Bolt-on, IP 67, 3 conductors

KXC-II 63607 - B - S 10

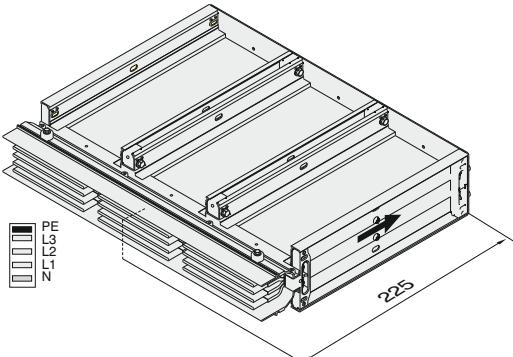


End Closer



- S 11

Sample Order:

5000 A, Copper,
Bolt-on, IP 67, 3 conductors

KXC-II 50607 - B - S 11

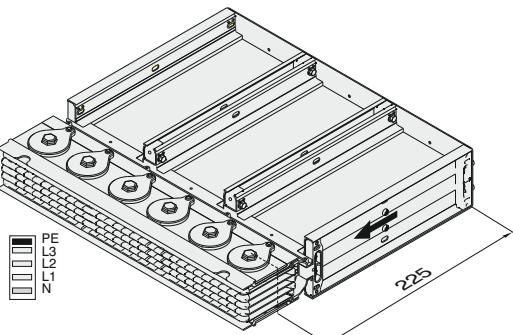

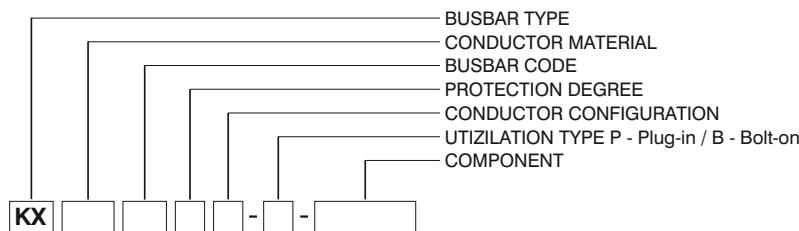



Panel Connection - P 1 0

Panel Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4½ conductors
for Panel Feeder

KXC-II 25507 - B - P10

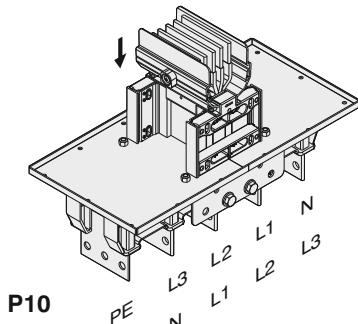



Panel Connection - P 1 1

Busbar Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4½ conductors
for Busbar Feeder

KXC-II 25507 - B - P11

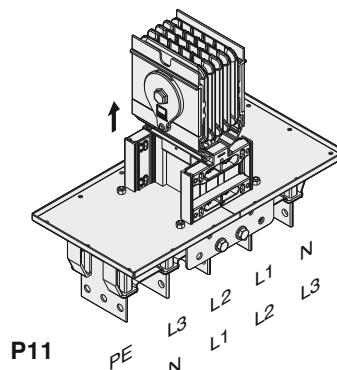



Upwards Panel Connection - P U 2 0

Panel Feeder

Sample Order:

3600 A, Copper, Bolt-on, 4½ conductors
for Panel Feeder

KXC-II 36507 - B - PU20

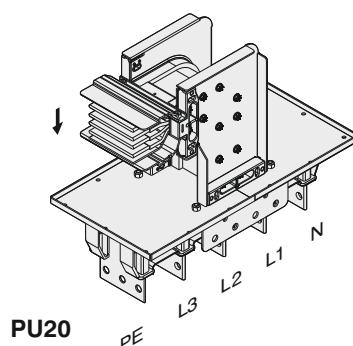


Downwards Panel Connection - P D 2 0

Panel Feeder

Sample Order:

4000 A, Copper, Bolt-on, 4½ conductors
for Panel Feeder

KXC-II 40507 - B - PD20


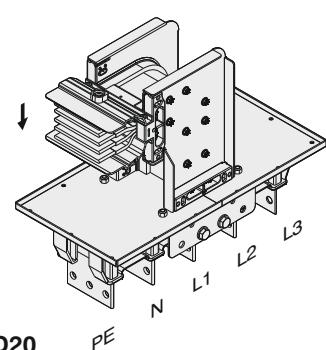


For connection dimensions please refer to tables on pages 23 and 24.

■ Distance between conductors can vary in ± 5 mm.

■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

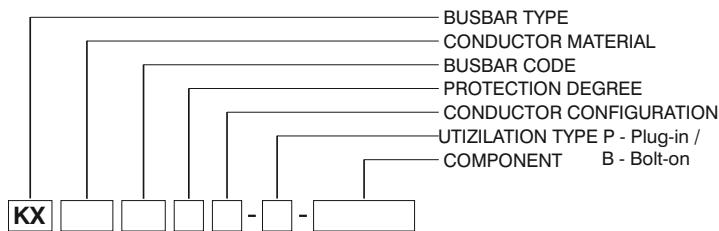

Upwards Busbar Connection


- PU 2 1

Busbar Feeder

Sample Order:

3600 A, Copper, Bolt-on, 4 ½ conductors
for Busbar Feeder

KXC-II 36507 - B - PU21



Downwards Busbar Connection


- PD 2 1

Busbar Feeder

Sample Order:

4000 A, Copper, Bolt-on, 4½ conductors
for Busbar Feeder

KXC-II 40507 - B - PD21

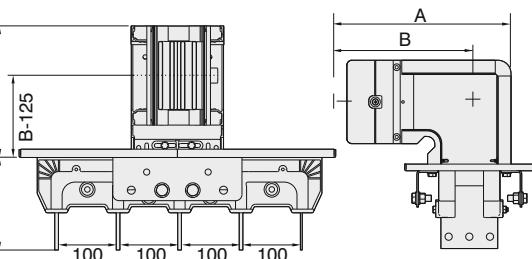

Right Panel Connection


- PR 3 0

Panel Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4 ½ conductors
for Panel Feeder

KXC-II 25507 - B - PR30

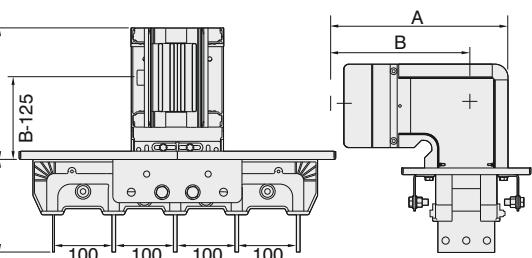

Left Panel Connection





- PL 3 0

Panel Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4 ½ conductors
for Panel Feeder

KXC-II 25507 - B - PL30

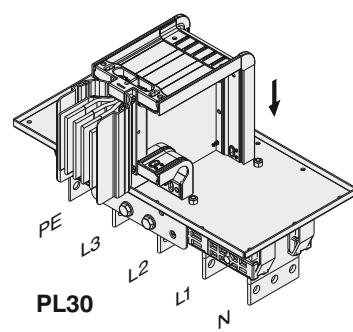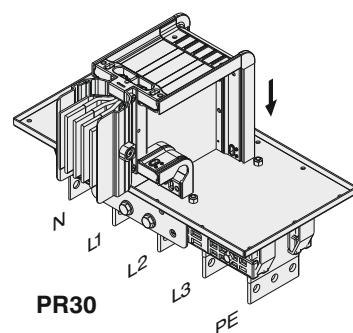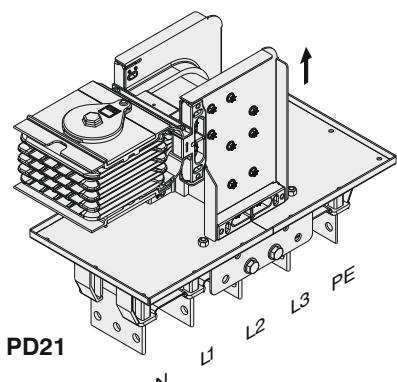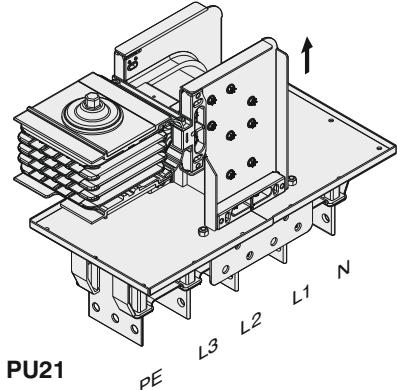



The "A" and "B" dimensions for PR30 and PL30 are the same dimensions as left and right elbows.
Please refer to page 12 for the dimensions.

For connection dimensions please refer to tables on pages 23 and 24.

■ Distance between conductors can vary in ± 5 mm.

■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

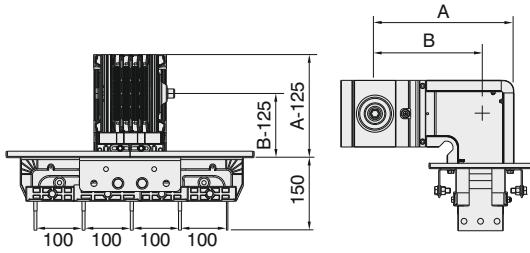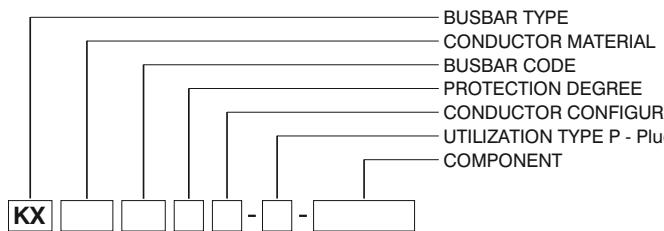



Right Panel Connection - PR 31

Busbar Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4 ½ conductors
for Busbar Feeder

KXC-II 25507 - B - PR31

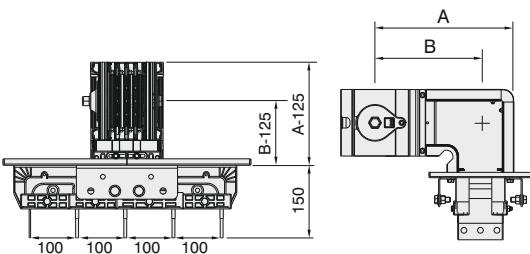



Left Panel Connection - PL 31

Busbar Feeder

Sample Order:

2500 A, Copper, Bolt-on, 4 ½ conductors
for Busbar Feeder

KXC-II 25507 - B - PL31

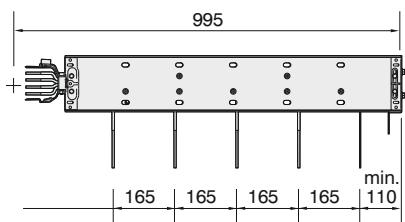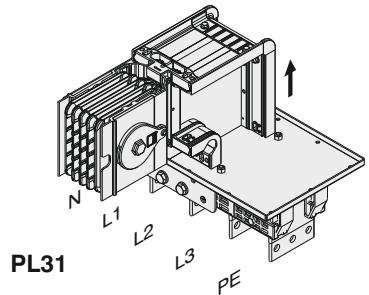



Panel Connection - P 40

Panel Feeder

Sample Order:

3300 A, Copper, Bolt-on, 4 ½ conductors
for Panel Feeder

KXC-II 32507 - B - P40

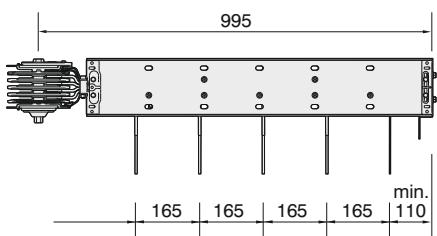


Panel Connection - P 41

Busbar Feeder

Sample Order:

3300 A, Copper, Bolt-on, 4 ½ conductors
for Busbar Feeder

KXC-II 32507 - B - P41

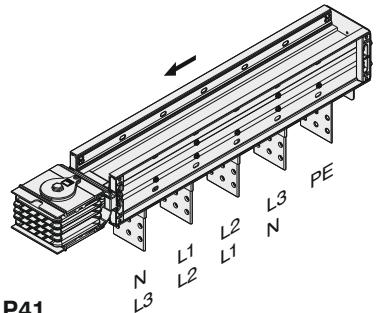

The "A" and "B" dimensions for PR31 and PL31 are the same dimensions as left and right elbows.
Please refer to page 12 for the dimensions.

For connection dimensions please refer to tables on pages 23 and 24.

■ Distance between conductors can vary in ± 5 mm.


■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

► Panel Connections

Panel Connection Units

Panel Connection Units (P10,P11,PU20,PD20,PU21,PD21,PL30,PR30,PL31,PR31,P40,P41)

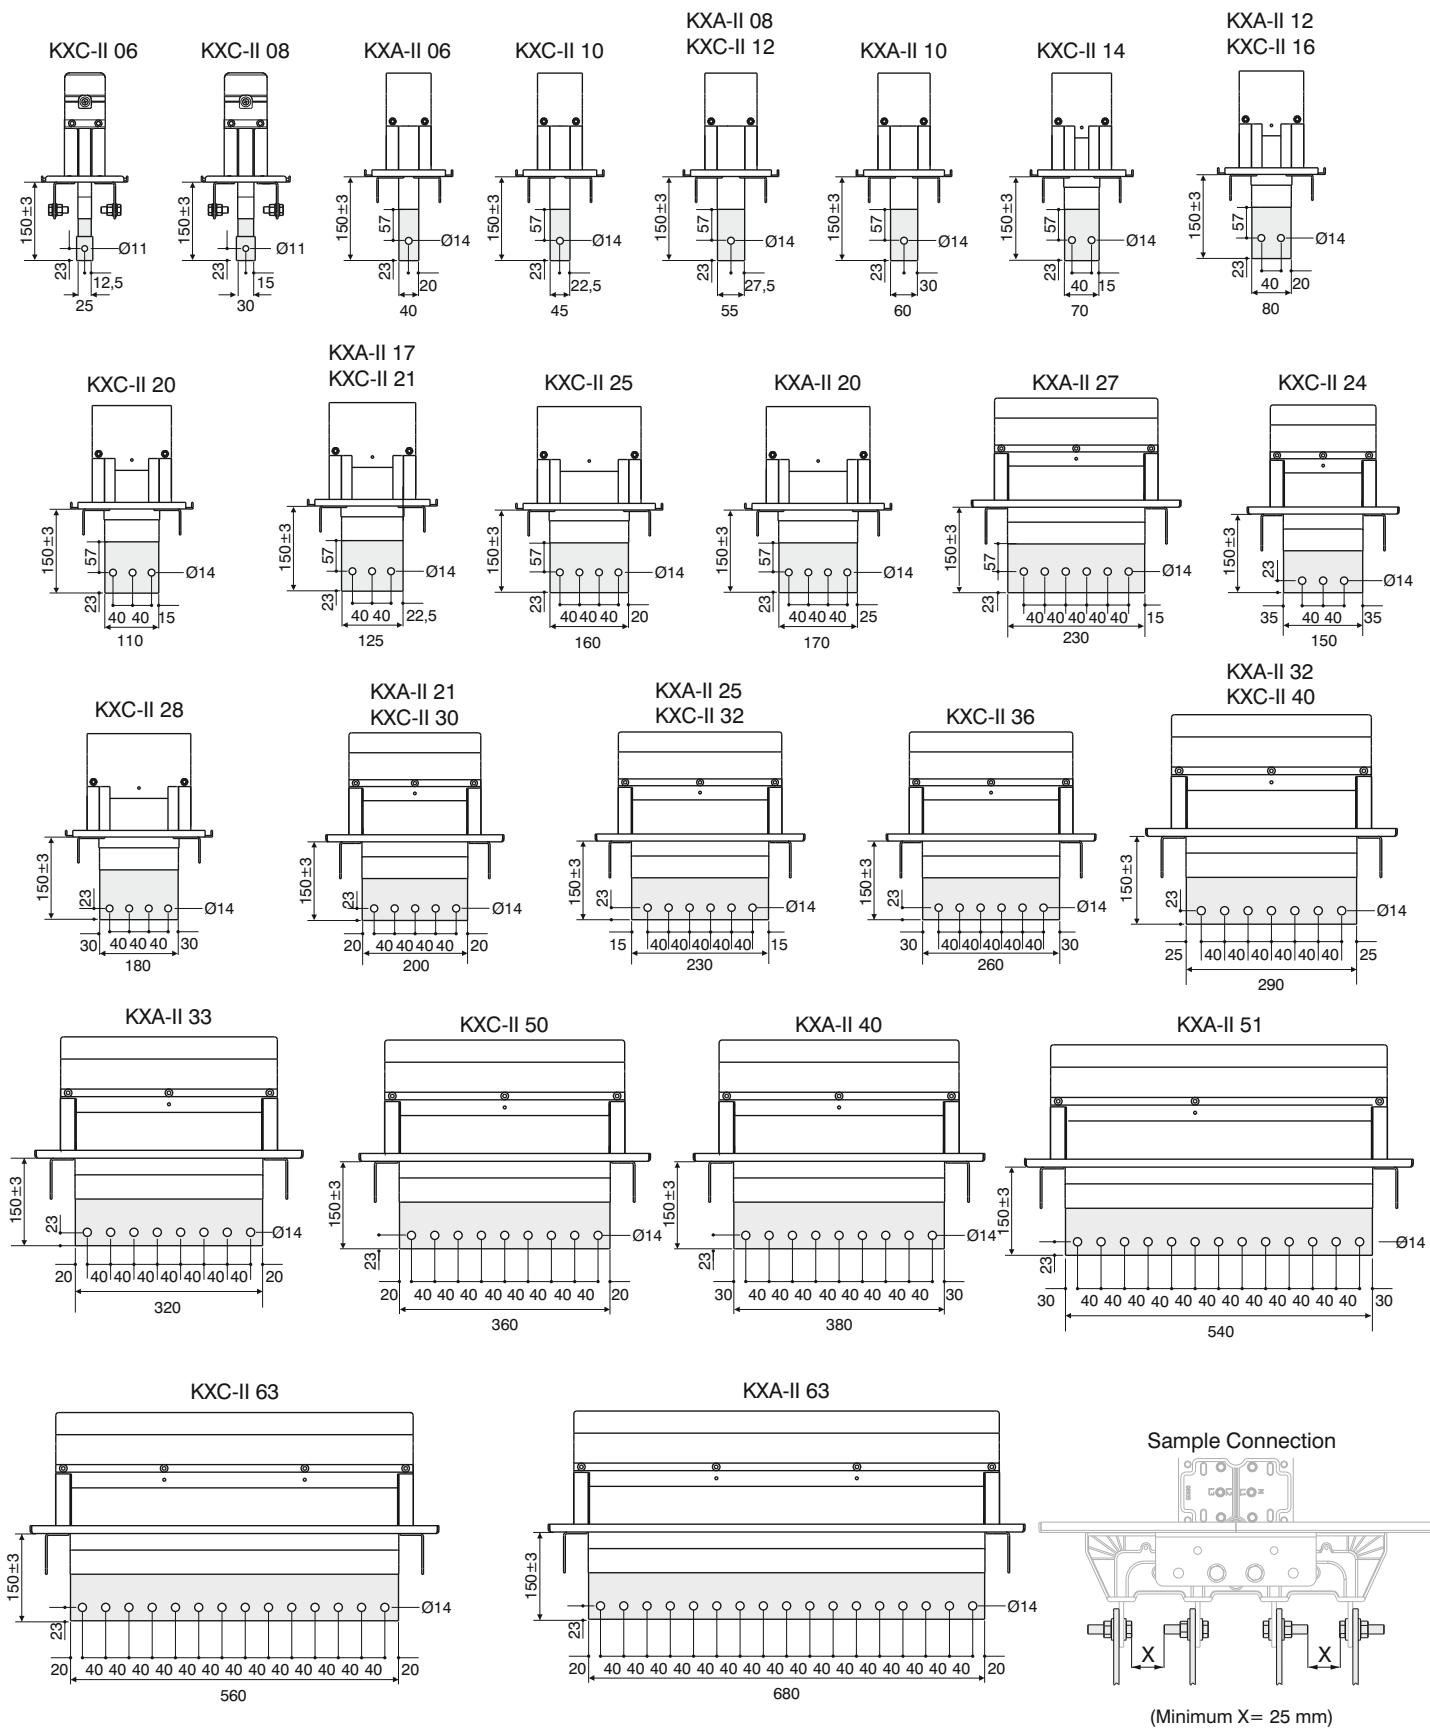

■ Please call us for non-standard components.



■ Distance between conductors can vary in ±5 mm.

■ The dimensions given above are minimum values.

► Panel Connection Dimensions



Flange Dimensions

Panel Connection Units are supplied with suitable flange as standard.

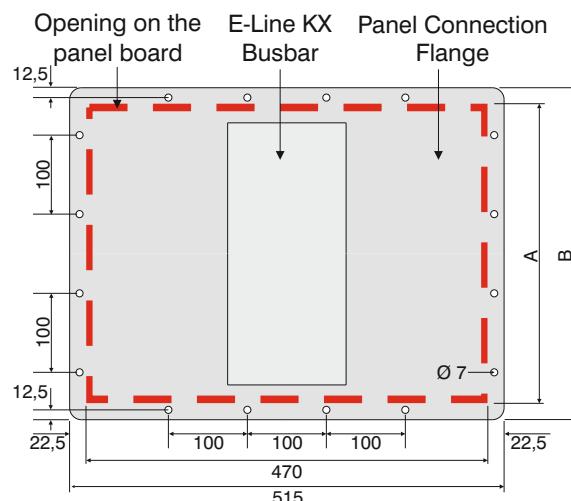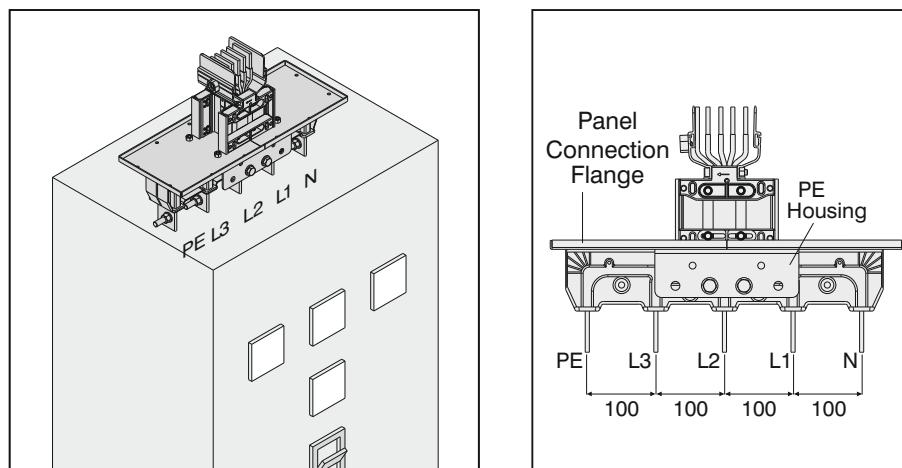

* Bolt and nut sets are supplied together with related product as per the quantities below.


Aluminium (Al)		Copper (Cu)		Conductor Size	A (mm)	B (mm)	Number of the holes along B length	* M6 Bolt/Nut Set(pcs)
Rated Current	Busbar Code	Rated Current	Busbar Code					
-	-	650	06	6x25	120	165	2	12
-	-	800	08	6x30	125	170	2	12
630	06	-	-	6x40	135	180	2	12
-	-	1000	10	6x45	140	185	2	12
800	08	1250	12	6x55	150	195	2	12
1000	10	-	-	6x60	155	200	2	12
-	-	1350	14	6x70	165	210	2	12
1250	12	1600	16	6x80	175	220	2	12
-	-	2000	20	6x110	205	250	3	14
1600	17	2250	21	6x125	220	265	3	14
-	-	2500	25	6x160	255	300	3	14
2000	20	-	-	6x170	265	310	3	14
2500	27	-	-	6x230	325	370	4	16
-	-	2250	24	2(6x55)	245	290	3	14
-	-	2750	28	2(6x70)	275	320	3	14
2350	21	3000	30	2(6x80)	295	340	3	14
2500	25	3300	32	2(6x95)	325	370	4	16
-	-	3600	36	2(6x110)	355	400	4	16
3000	32	4000	40	2(6x125)	385	430	4	16
3300	33	-	-	2(6x140)	415	460	5	18
-	-	5000	50	2(6x160)	455	500	5	18
4000	40	-	-	2(6x170)	475	520	5	18
5000	51	-	-	2(6x250)	635	680	7	22
-	-	6300	63	3(6x160)	655	700	7	22
6300	63	-	-	3(6x200)	775	820	8	24

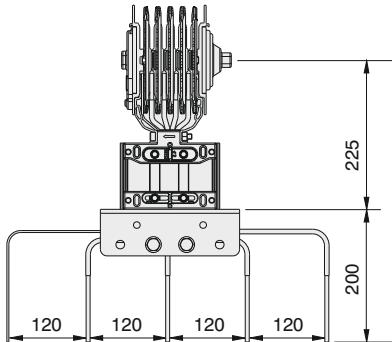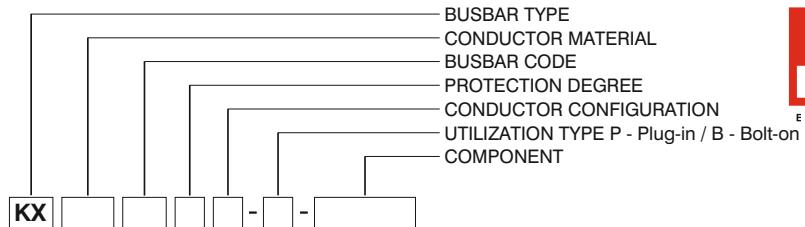


Transformer Connection - T R 11

Sample Order:

2500 A, Copper, Bolt-on, 4 conductors
KXC-II 25507 - B - TR11-120

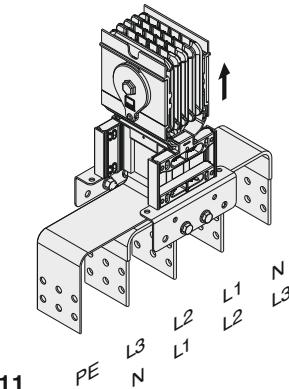


TR11

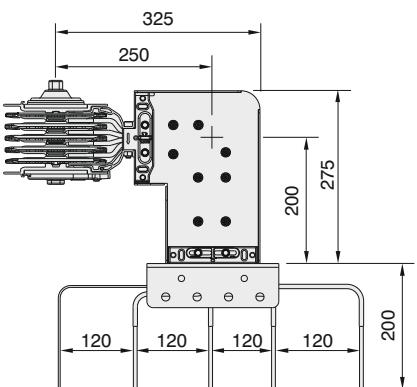


Upwards Transformer Connection - T U 21

Sample Order:

2500 A, Copper, Bolt-on, 4 conductors
KXC-II 25507 - B - TU21-120




TU21

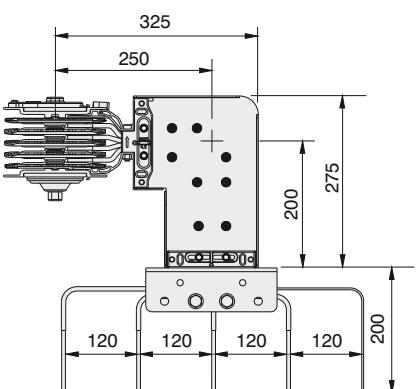

Downwards Transformer Connection - T D 21

Sample Order:

2500 A, Copper, Bolt-on, 4 conductors
KXC-II 25507 - B - TD21-120




TD21

For connection dimensions please refer to tables on pages 28 and 29.

■ Distance between conductors can vary in ± 5 mm.

■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

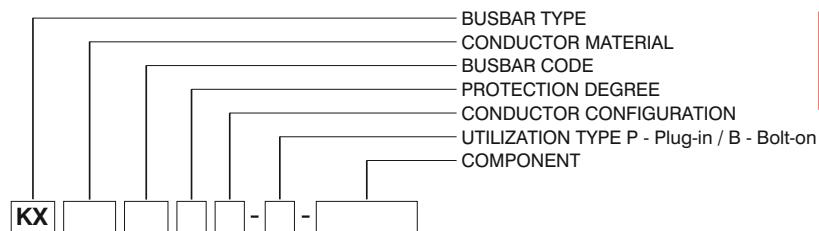

For transformer and panel connection applications EAE design and planning department can prepare your projects upon request.

For the design, the following information is required:

- Plan of transformer and panel board room, heights.
- Transformer dimensions, distance between bushings.

For connection dimensions please refer to tables on page 28.


Transformer Connection

- T R 3 1

Sample Order:

2500 A, Copper, Bolt-on, 4 ½ conductors

KXC-II 25507 - B - TR31

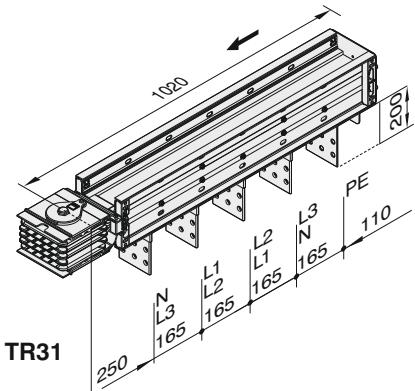

Flexible are used for

- Transformer - busbar,
- Panel - busbar connections.

- F



L
(cm)


Sample Order:

800 A, Copper

KXC 0800 - F40

B=.....mm
X=.....mm
Y=.....mm
Z=.....mm
Ø=.....mm

Flexibles

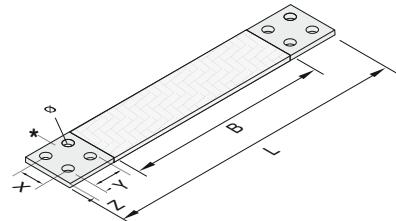

- This side is punched according to the needs of the customer.





Right Transformer Connection

- T R 5 1

Sample Order:

2500 A, Copper, Bolt-on,
4 ½ conductors

KXC-II 25507 - B - TR51



TL51



Left Transformer Connection

- T L 5 1

Sample Order:

2500 A, Copper, Bolt-on,
4 ½ conductors


KXC-II 25507 - B - TL51



■ Distance between conductors can vary in ±5 mm.

■ Please call us for non-standard components.

■ The dimensions given above are minimum values.

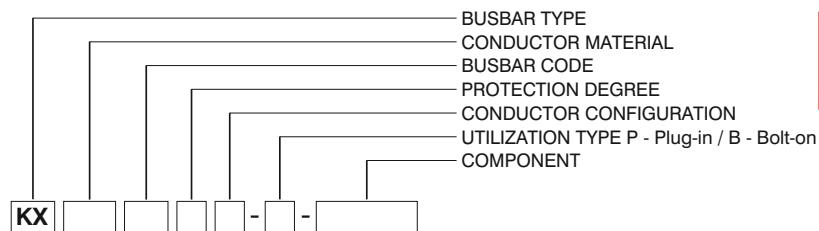


Transformer Connection

- T R 41

Sample Order:

2500 A, Copper, Bolt-on, 4 1/2 conductors

KXC-II 25507 - B - TR41

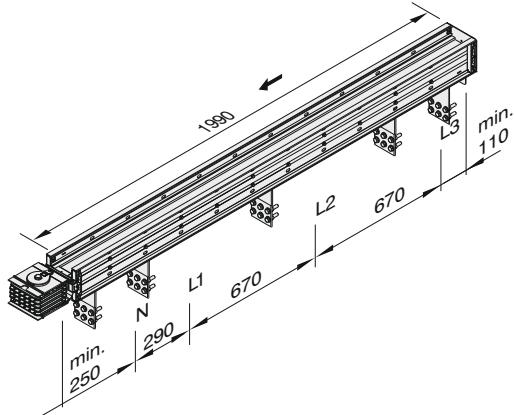


Transformer Connection

- T R 61

Sample Order:

3600 A, Copper, Bolt-on
4 1/2 conductors

KXC-II 36507 - B - TR61

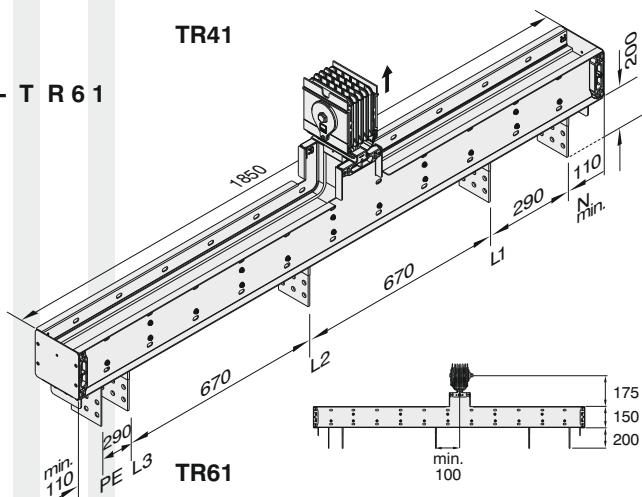


Transformer Connection

- T R 71

Sample Order:


4000 A, Copper, Bolt-on,
4 1/2 conductors

KXC-II 40507 - B - TR71

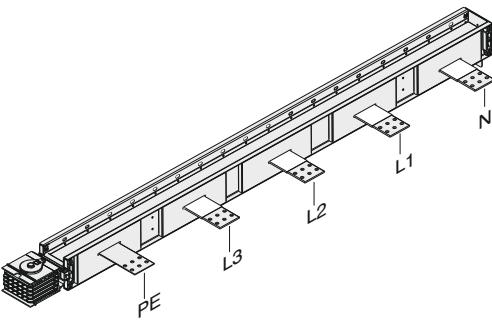

TR71 Dimension Table

KXA-II Al Conductor		KXC-II Cu Conductor		Conductor	A min (mm)	B min (mm)	X min (mm)
Rated Current	Busbar Code	Rated Current	Busbar Code		(mm)	(mm)	(mm)
-	-	650	06	6x25	263	123	85
-	-	800	08	6x30	265	125	90
630	06	-	-	6x40	270	130	100
-	-	1000	10	6x45	273	133	105
800	08	1250	12	6x55	278	138	115
1000	10	-	-	6x60	280	140	120
-	-	1350	14	6x70	285	145	130
1250	12	1600	16	6x80	290	150	140
-	-	2000	20	6x110	305	165	170
1600	17	2250	21	6x125	313	173	185
-	-	2500	25	6x160	330	190	220
2000	20	-	-	6x170	335	195	230
2500	27	-	-	6x230	365	225	260
-	-	2250	24	2(6x55)	278	138	115
-	-	2750	28	2(6x70)	285	145	130
2350	21	3000	30	2(6x80)	290	150	140
2500	25	3300	32	2(6x95)	299	159	155
-	-	3600	36	2(6x110)	305	165	170
3000	32	4000	40	2(6x125)	313	173	185
3300	33	-	-	2(6x140)	320	180	200
-	-	5000	50	2(6x160)	330	190	220
4000	40	-	-	2(6x170)	335	200	230
5000	51	-	-	2(6x250)	375	240	310

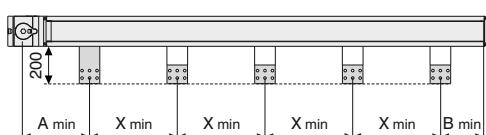


- Distance between conductors can vary in ±5 mm.
- Please call us for non-standard components.
- The dimensions given above are minimum values.

Transformer Connection Units

Transformer Connection Units (TR31, TR41, TR61)

Note: No flange supplied with transformer connection units.

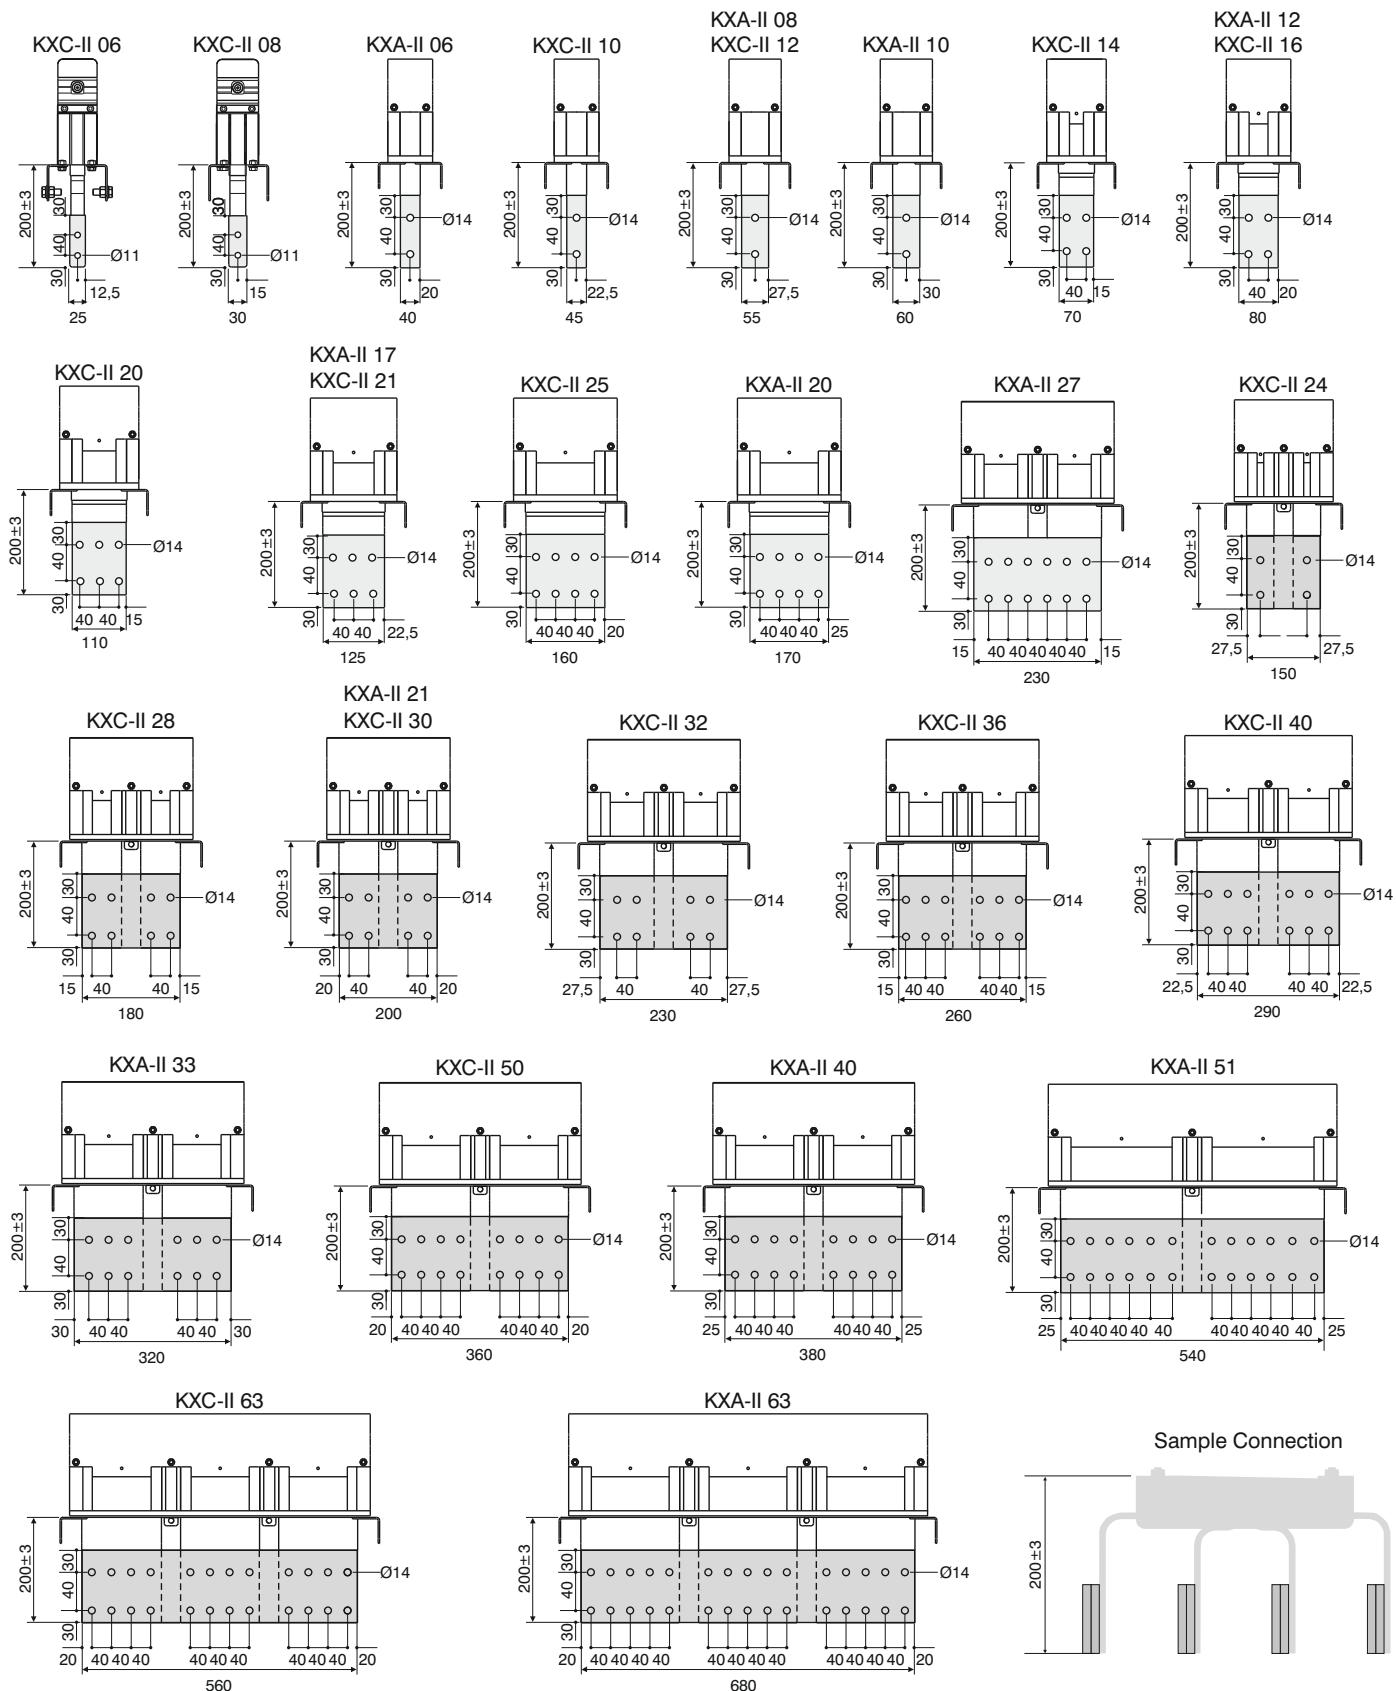

■ Please call us for non-standard components.


■ Distance between conductors can vary in ± 5 mm.

■ The dimensions given above are minimum values.

Transformer Connection Units

Transformer Connection Units (TR11, TU21, TD21, TR51, TL51)

Note: No flange supplied with transformer connection units.

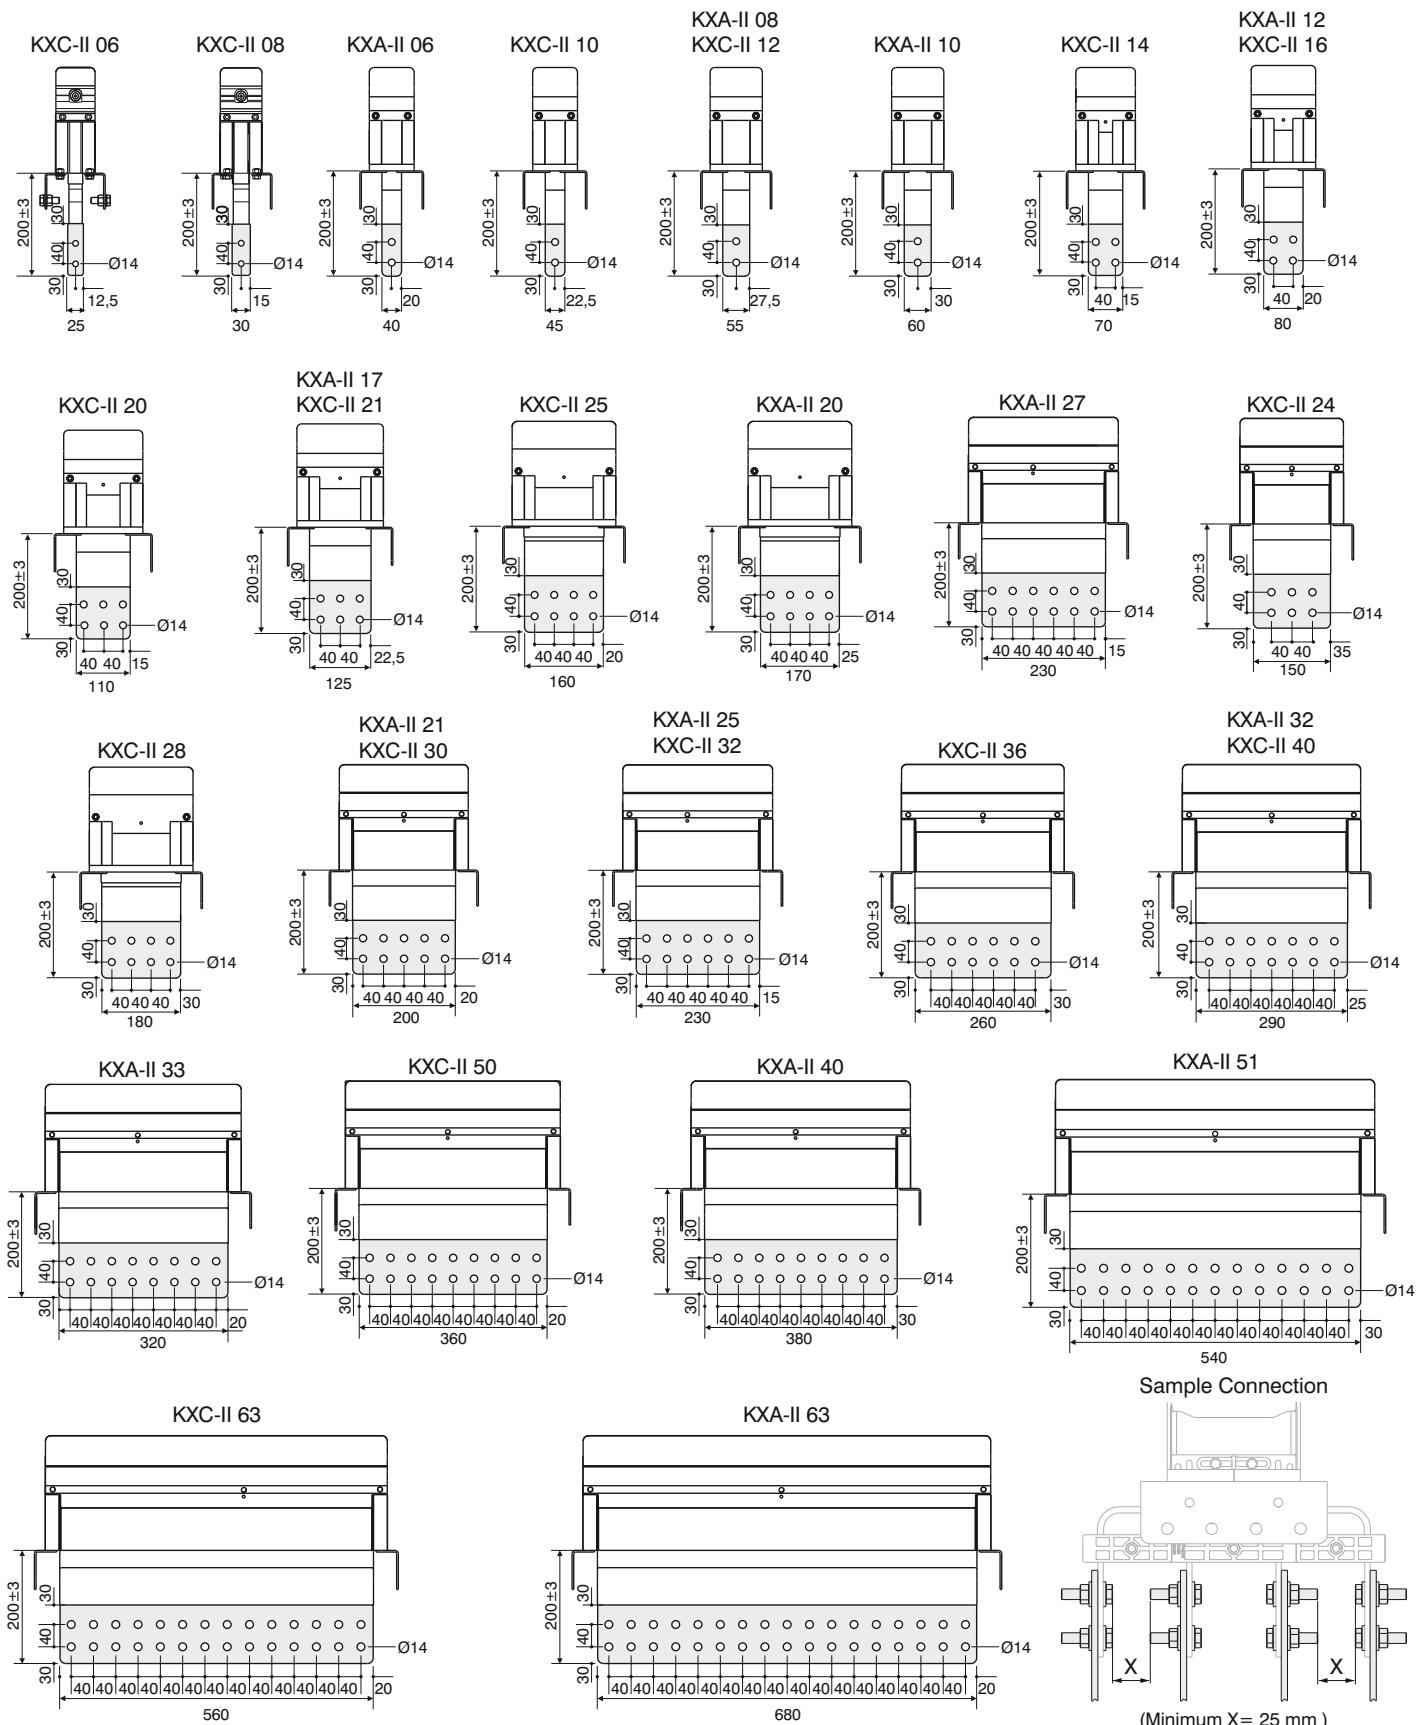




■ Please call us for non-standard components.

■ Distance between conductors can vary in ± 5 mm.

■ The dimensions given above are minimum values.




Easy Installation System of Tap-off Boxes

The patented hinge system is designed to allow the installation of plug-in tap-off boxes simply and easily.

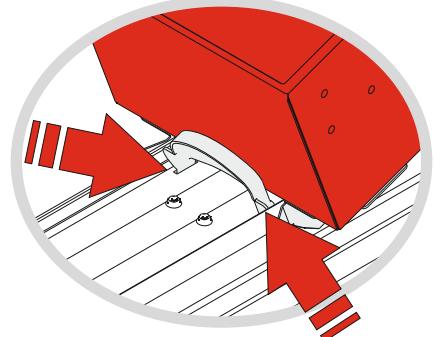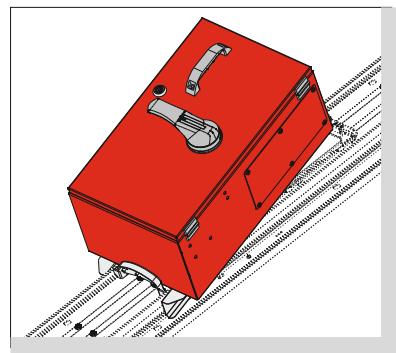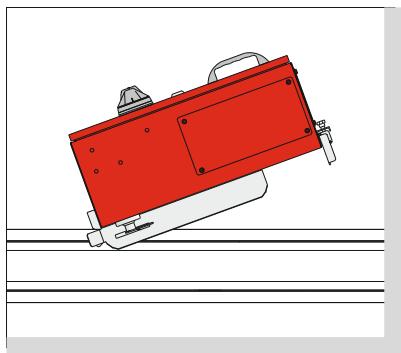


Fixing System of Tap-off Boxes to Busbars

Hook system, which is used for fixing of tap-off boxes on busbars.

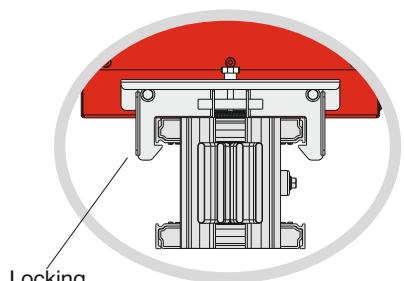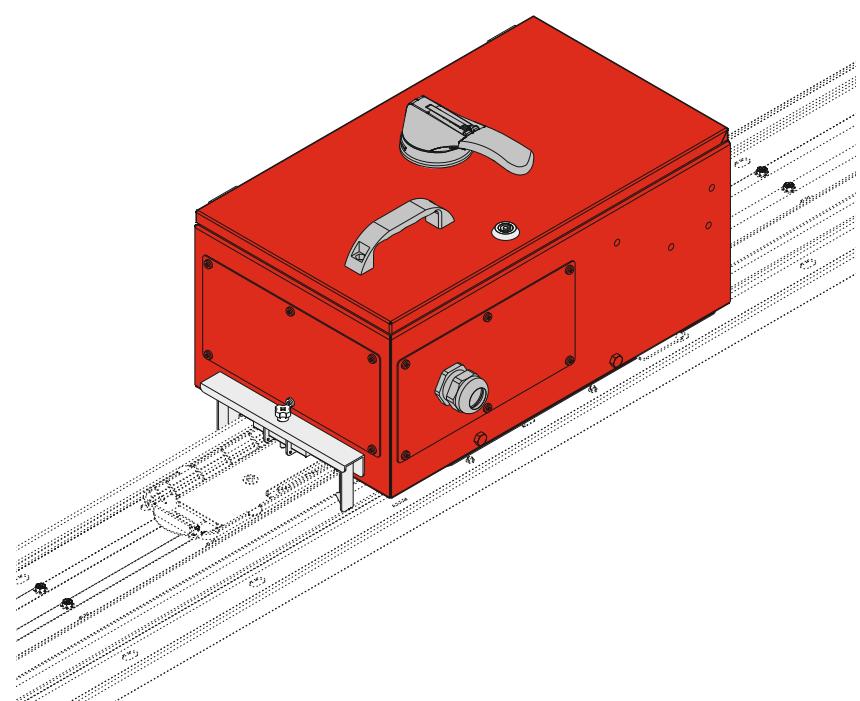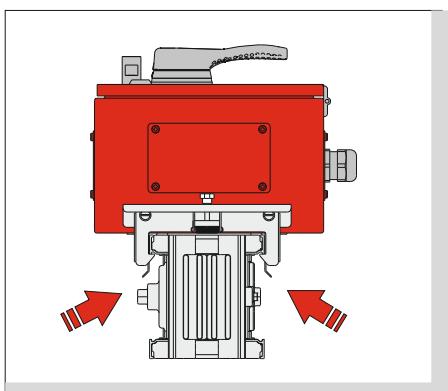

Locking Point





Universal Tap-off Boxes

Tap off boxes can be equipped with any brand of switches, circuit breakers and etc. Please inform EAE the type and brand of choosen MCCB, when ordering.



Side Opening Box Lids

A new generation of tap-off box with side opening lids enables easier connection to protective devices and maintenance.

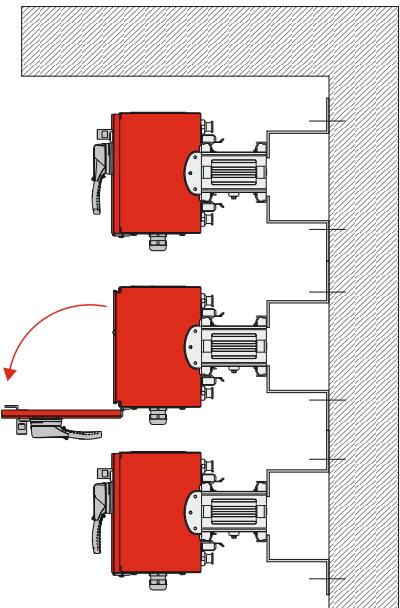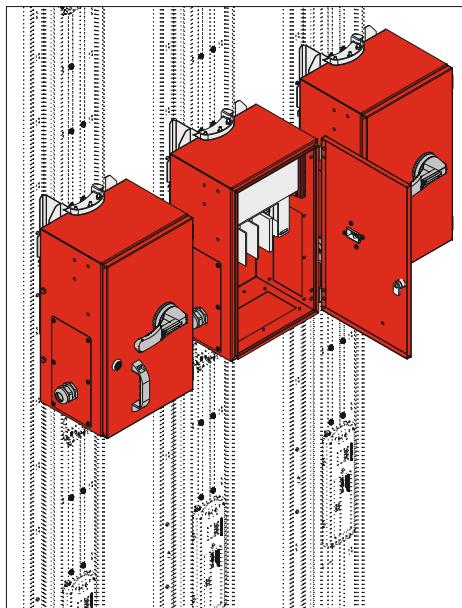




Bolt-on Tap-off Boxes

- Bolt-on tap-off boxes are designed to be installed at the joints without removing the joint block.
- The range of tap off boxes from 160A upto 1.000A.
- Busbar run must be de-energized before installing bolt-on tap-off boxes.

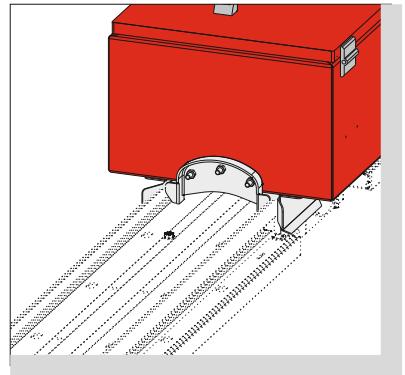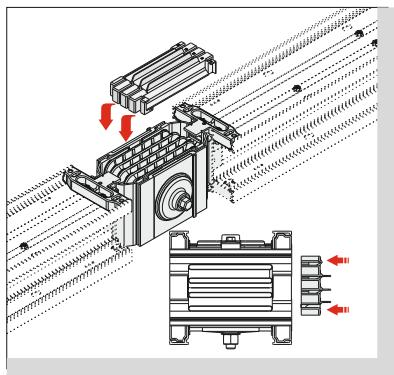

Effective Gasket

- Protection from dust and humidity due to effective gasket system.
- High IP Protection due to special forming.

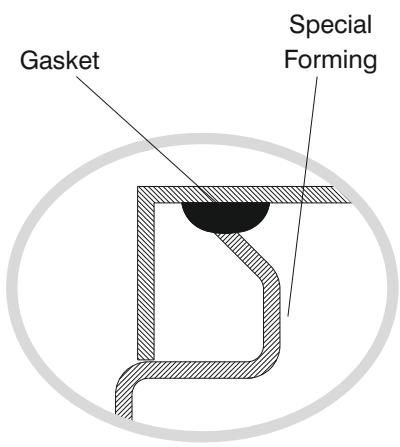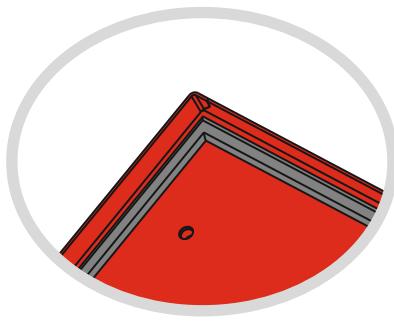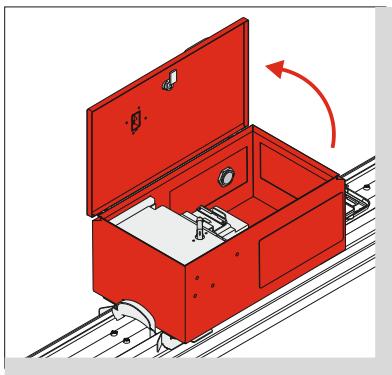


ELINEKX-II

► Tap-off Boxes with Fused Switches (Bolt-on-KXB)

Cable Gland Plates

Mat. Sheet	Cable Gland Type ----	Order Code RP0	Inner Diameter (mm)
Sheet	M32	RP1	25
Sheet	M40	RP2	32
Sheet	Special	RP3	63
AL	2xSpecial	RP4	63
AL	4xM25	RP5	18
AL	4xM32	RP6	25
AL	4xM40	RP7	32
AL	8xM32	RP8	25

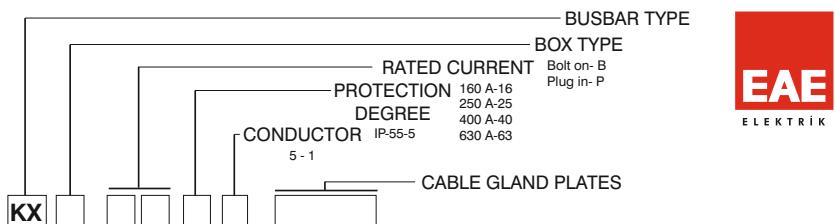




Bolt-on Tap-off Boxes

KX B 1 6 5 1
KX B 2 5 5 1
KX B 4 0 5 1
KX B 6 3 5 1

Sample Order:

Bolt-on / 630 A / IP-55 /
5 conductors

KXB 6351

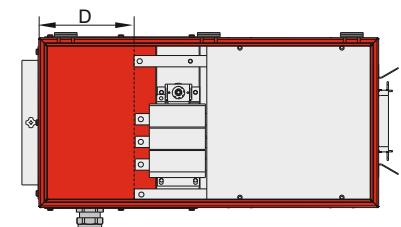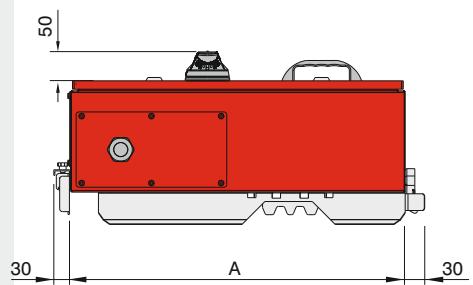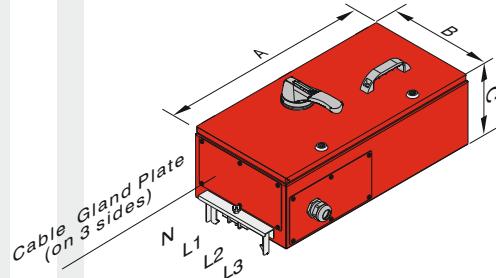

Bolt-on tap-off box can not be used on the joints of mentioned ranges of busbars.

KXA - Al Conductor		KXC - Cu Conductor		Bolt-on Tap-off Box
Rated Current	Busbar Code	Rated Current	Busbar Code	
-	-	650	06	x
-	-	800	08	x
630	06	1000	10	x
800	08	1250	12	x

Gland Type	Max. External Diameter of Cable Cros-section
M25	Ø 18
M32	Ø 26
M40	Ø 33
M50	Ø 39
M63	Ø 45
Special for EAE	Ø 60

Notes:

EAE Bolt-on Tap Off Boxes are secured with an interlocking mechanism. This protects against attaching them to or removing them from the busbar in the "ON" position. When in the "OFF" position they are safe to attach to or remove from the busbar.

- Tap off boxes shall not be used empty. Fused switches, MCCBs or similar protection devices must be installed into tap-off boxes before they are installed to the busbar runs.

Tap-off Boxes	A (mm)	B (mm)	C (mm)	D (mm)	Fuse Size	Standard Gland
KXB 16	750	380	240	265	NH00	RP2
KXB 25	750	380	240	265	NH 1	RP3
KXB 40	850	420	260	265	NH 3	RP4
KXB 63	850	420	260	265	NH 3	RP4

Tap-off boxes can be equipped with any brand of switches, circuit breakers and etc.

Please call us for non-standard tap-off boxes and detailed information.


■ The dimensions given above are minimum values.

ELINEKX-II


► Tap-off Boxes with Fused Switches (Plug-in-KXP)



Cable Gland Plates



Mat. Sheet	Cable Gland Type ----	Order Code RP0	Inner Diameter (mm)
Sheet	M32	RP1	25
Sheet	M40	RP2	32
Sheet	Special	RP3	63
AL	2xSpecial	RP4	63
AL	4xM25	RP5	18
AL	4xM32	RP6	25
AL	4xM40	RP7	32
AL	8xM32	RP8	25

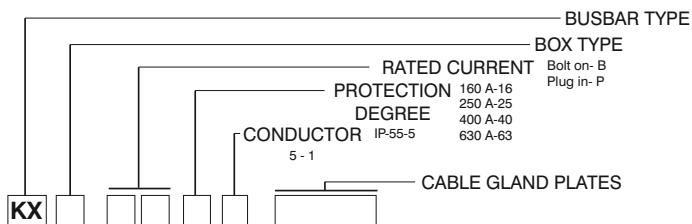




Plug-in Tap-off Boxes

KX P 1 6 5 1
KX P 2 5 5 1
KX P 4 0 5 1
KX P 6 3 5 1

Sample Order:

Plug-in / 630 A / IP-55 / 5 conductors

KXP 6351

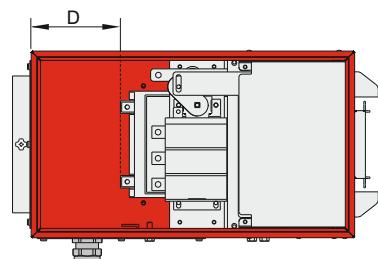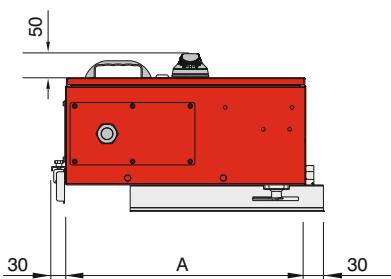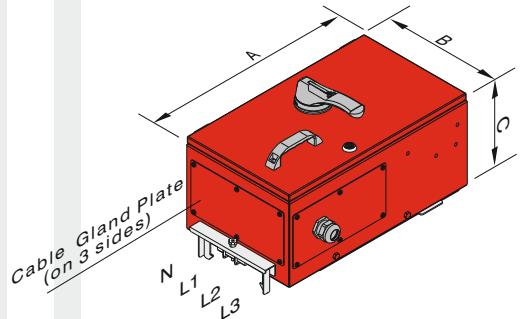

Notes:

EAE Plug-in Tap Off Boxes are secured with an interlocking mechanism. This protects against attaching them to or removing them from the busbar in the "ON" position. When in the "OFF" position they are safe to attach to or remove from the busbar.

- Tap off boxes shall not be used empty. Fused switches, MCCBs or similar protection devices must be installed into tap-off boxes before they are installed to the busbar runs.

Tap-off Boxes	A (mm)	B (mm)	C (mm)	D (mm)	Fuse Size	Standard Gland
KXP 16	520	300	210	250	NH00	RP2
KXP 25	670	380	270	310	NH 1	RP3
KXP 40	750	420	300	285	NH 3	RP4
KXP 63	750	420	300	285	NH 3	RP4

Tap-off boxes can be equipped with any brand of switches, circuit breakers and etc.

Please call us for non-standard tap-off boxes and detailed information.

Gland Type	Max. External Diameter of Cable Crossection
M25	Ø 18
M32	Ø 26
M40	Ø 33
M50	Ø 39
M63	Ø 45
Special for EAE	Ø 60


■ The dimensions given above are minimum values.

ELINE KX-II

► Tap-off Boxes
for MCCB's (KXB)




Cable Gland Plates

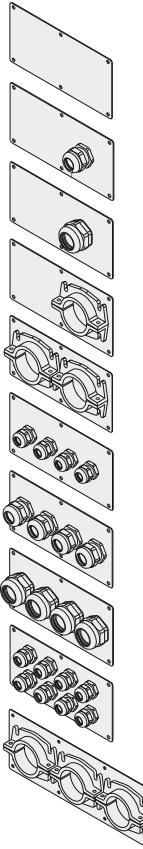

Mat.	Cable Gland Type	Order Code	Inner Diameter (mm)
Sheet	----	RP0	
Sheet	M32	RP1	25
Sheet	M40	RP2	32
Sheet	Special	RP3	63
AL	2xSpecial	RP4	63
AL	4xM25	RP5	18
AL	4xM32	RP6	25
AL	4xM40	RP7	32
AL	8xM32	RP8	25
AL	3xSpecial	RP9	63

Special Cable Gland Plates




Mat.	Cable Gland Type	Order Code	Inner Diameter (mm)
Sheet	----	RPK0	---
Sheet	M25	RPK1	18
Sheet	M32	RPK2	25
Sheet	M40	RPK3	32
Sheet	1xSpecial	RPK4	63

Tap-off Boxes	A (mm)	B (mm)	C (mm)	*D (mm)	Standard Gland
KXB 16	650	300	220	130	RPK3
KXB 25	650	300	220	130	RPK4
KXB 40	800	300	220	210	RP4
KXB 63	800	300	220	210	RP4
KXB 80	1100	450	275	385	RP9
KXB 10	1100	450	275	385	RP9

* D value varies as per the used switch.

* Tap-off boxes can be equipped with any brand of MCCB's.

Please call us for non-standard tap-off boxes.

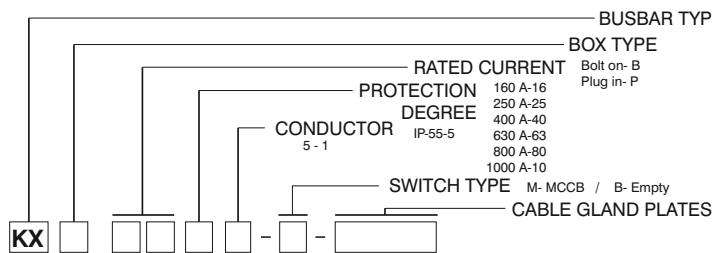

Bolt-on Tap-off Boxes

KX B 1651 - B

KX B 2551 - B

KX B 4051 - B

KX B 6351 - B

KX B 1651 - M

KX B 2551 - M


KX B 4051 - M

KX B 6351 - M

Sample Order:

Bolt-on / 630 A / IP-55 / 5 conductors, empty tap-off box

KXB 6351 - B

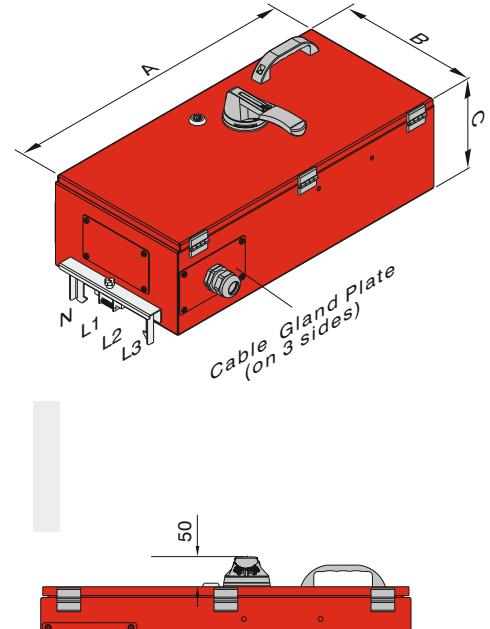

KX B 8051 - B

KX B 1051 - B


KX B 8051 - M

KX B 1051 - M

Sample Order:

Bolt-on / 800 A / IP-55 / 5 conductors, empty tap-off box

KXB 8051 - B

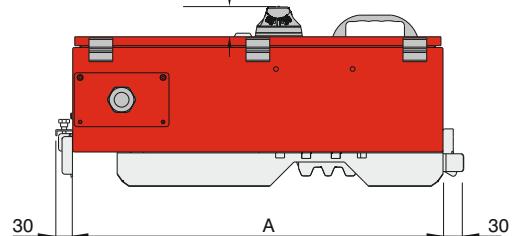

Bolt-on tap-off box can not be used on the joints of mentioned ranges of busbars.

KXA-II Al Conductor		KXC-II Cu Conductor		Bolt-on Tap-off Box
Rated Current	Busbar Code	Rated Current	Busbar Code	
-	-	650	06	x
-	-	800	08	x
630	06	1000	10	x
800	08	1250	12	x

Gland Type	Max. External Diameter of Cable Crossection
M25	Ø 18
M32	Ø 26
M40	Ø 33
M50	Ø 39
M63	Ø 45
Special for EAE	Ø 60


The dimensions given above are minimum values.

ELINE KX-II

► Tap-off Boxes
for MCCB's (KXP)




Cable Gland Plates

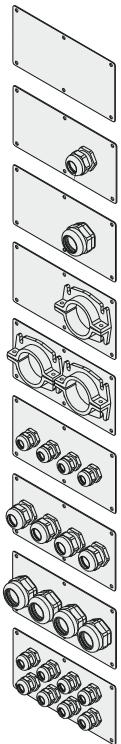

Mat.	Cable Gland Type	Order Code	Inner Diameter (mm)
Sheet	----	RP0	
Sheet	M32	RP1	25
Sheet	M40	RP2	32
Sheet	Special	RP3	63
AL	2xSpecial	RP4	63
AL	4xM25	RP5	18
AL	4xM32	RP6	25
AL	4xM40	RP7	32
AL	8xM32	RP8	25

Special Cable Gland Plates

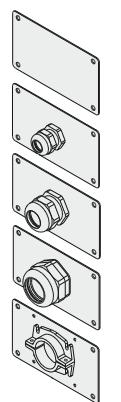


Mat.	Cable Gland Type	Order Code	Inner Diameter (mm)
Sheet	----	RPK0	----
Sheet	M25	RPK1	18
Sheet	M32	RPK2	25
Sheet	M40	RPK3	32
Sheet	1xSpecial	RPK4	63

Tap-off Boxes	A (mm)	B (mm)	C (mm)	*D (mm)	Standard Gland
KXP 16	520	320	250	150	RPK3
KXP 25	520	320	250	150	RPK4
KXP 40	700	320	250	255	RP4
KXP 63	700	320	250	255	RP4

* D value varies as per the used switch.

* Tap-off boxes can be equipped with any brand of MCCB's.

Please call us for non-standard tap-off boxes.

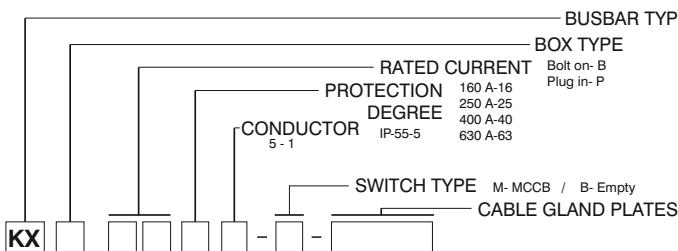

Plug-in Tap-off Boxes




KX P 1 6 5 1 - B1
KX P 2 5 5 1 - B1
KX P 4 0 5 1 - B1
KX P 6 3 5 1 - B1

KX P 1 6 5 1 - M1
KX P 2 5 5 1 - M1
KX P 4 0 5 1 - M1
KX P 6 3 5 1 - M1

Sample Order:

Plug-in / 400 A / IP-55 / 5 conductors, empty tap-off box

KXP 4051 - B1

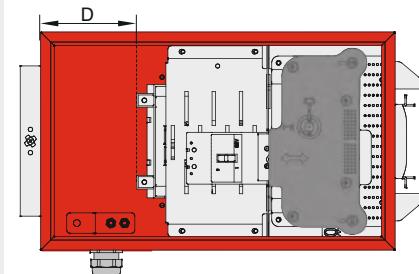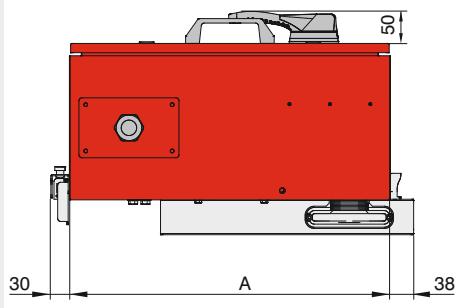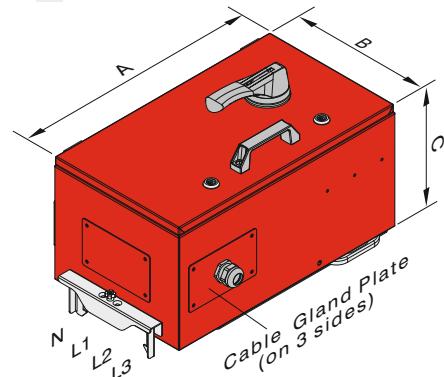

Gland Type	Max. External Diameter of Cable Cros-section
M25	Ø 18
M32	Ø 26
M40	Ø 33
M50	Ø 39
M63	Ø 45
Special for EAE	Ø 60

The dimensions given above are minimum values.

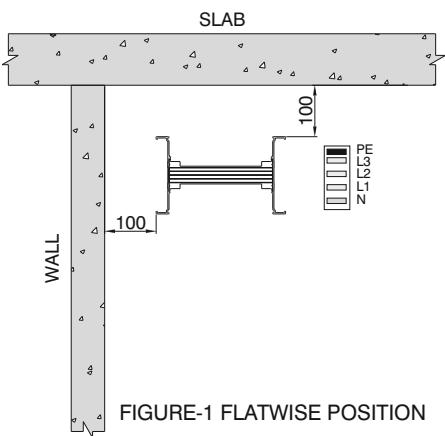


FIGURE-1 FLATWISE POSITION

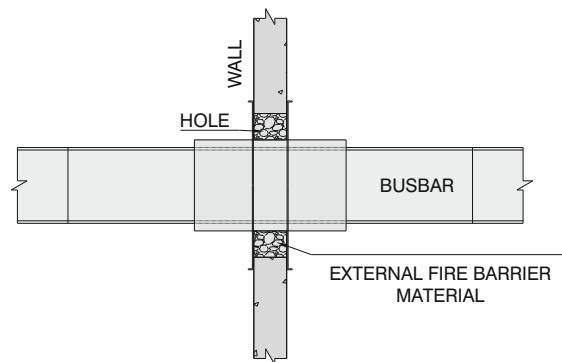


FIGURE-5 SAMPLE WALL CROSSING WITH FIRE BARRIER

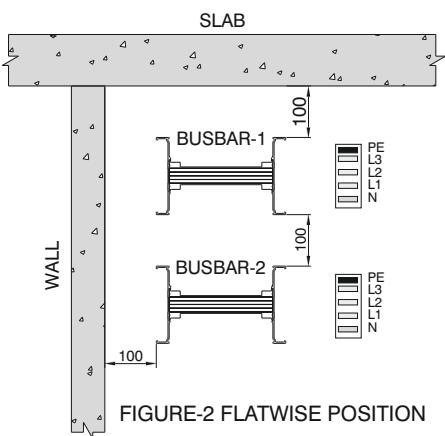


FIGURE-2 FLATWISE POSITION

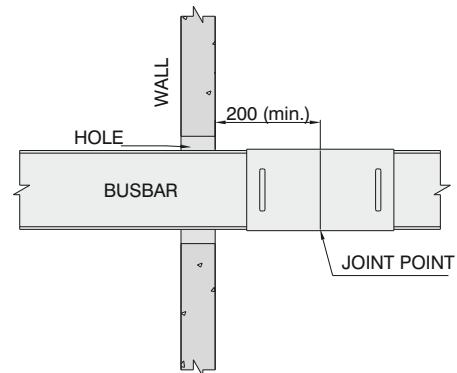


FIGURE-6 STANDARD WALL CROSSING

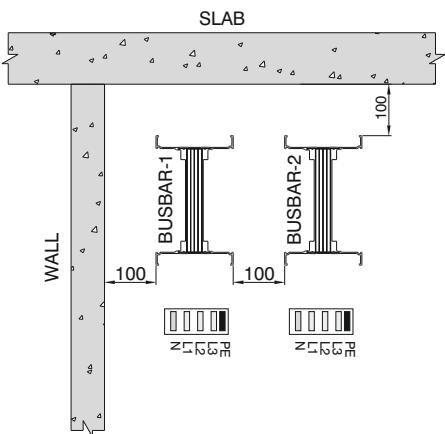


FIGURE-3 EDGEWISE POSITION


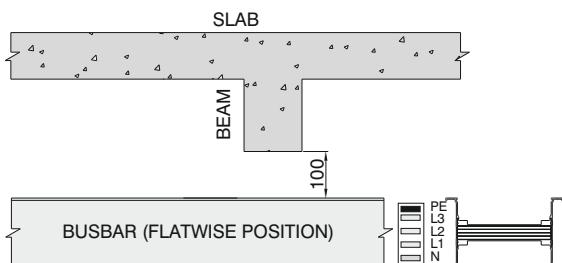


FIGURE-4 CROSSING UNDER A BEAM HORIZONTAL POSITION

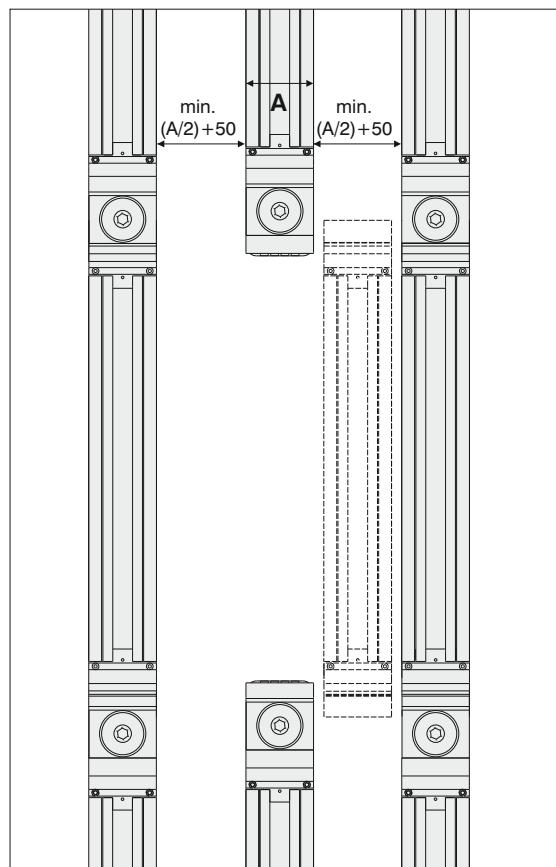

MINIMUM DISTANCE BETWEEN BUSBAR RUNS IN HORIZONTAL APPLICATIONS.

The dimensions given above are minimum values.

All measures are given in mm.

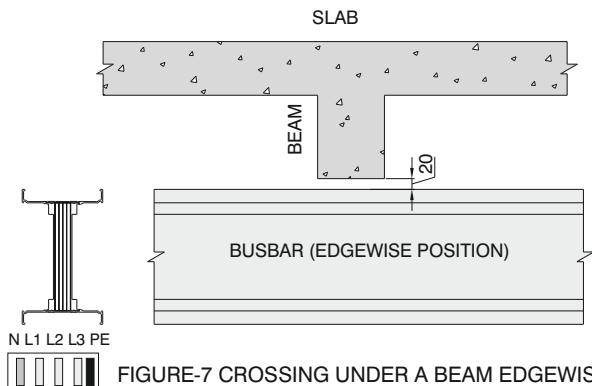


FIGURE-7 CROSSING UNDER A BEAM EDGEWISE POSITION

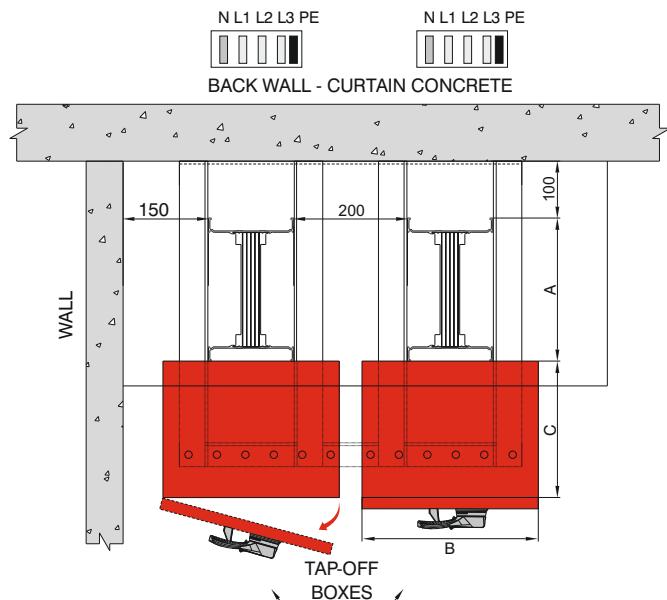


FIGURE-8 MINIMUM DIMENSIONS BETWEEN 2 TAP-OFF BOXES

Table For Outer Dimension of Busbars

KXA-II Al Conductor		KXC-II Cu Conductor		A
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)
-	-	650	06	77,5
-	-	800	08	82,5
630	06	-	-	91
-	-	1000	10	96
800	08	1250	12	106
1000	10	-	-	111
-	-	1350	14	121
1250	12	1600	16	131
-	-	2000	20	161
1600	17	2250	21	176
-	-	2500	25	211
2000	20	-	-	221
2500	27	-	-	281
-	-	2250	24	202
-	-	2750	28	232
2350	21	3000	30	252
2500	25	3300	32	282
-	-	3600	36	312
3000	32	4000	40	342
3300	33	-	-	372
-	-	5000	50	412
4000	40	-	-	432
5000	51	-	-	592
-	-	6300	63	612
6300	63	-	-	732

NOTE: In order to accomodate the busbar systems in the riser shaft;

MDM= Minimum Distance from the wall

"A" dimension = All dimensions are for standard modules .

"C" dimension = Please see page 32-35 and special dimension for Tap-off box "C" dimension

"B" dimension = Max. opening distance for Tap-off box cover.

Shaft Dimension =MDM + A + C + B + 100mm

Shown as (Figure-8)

- The dimensions given above are minimum values.
- All measures are given in mm.

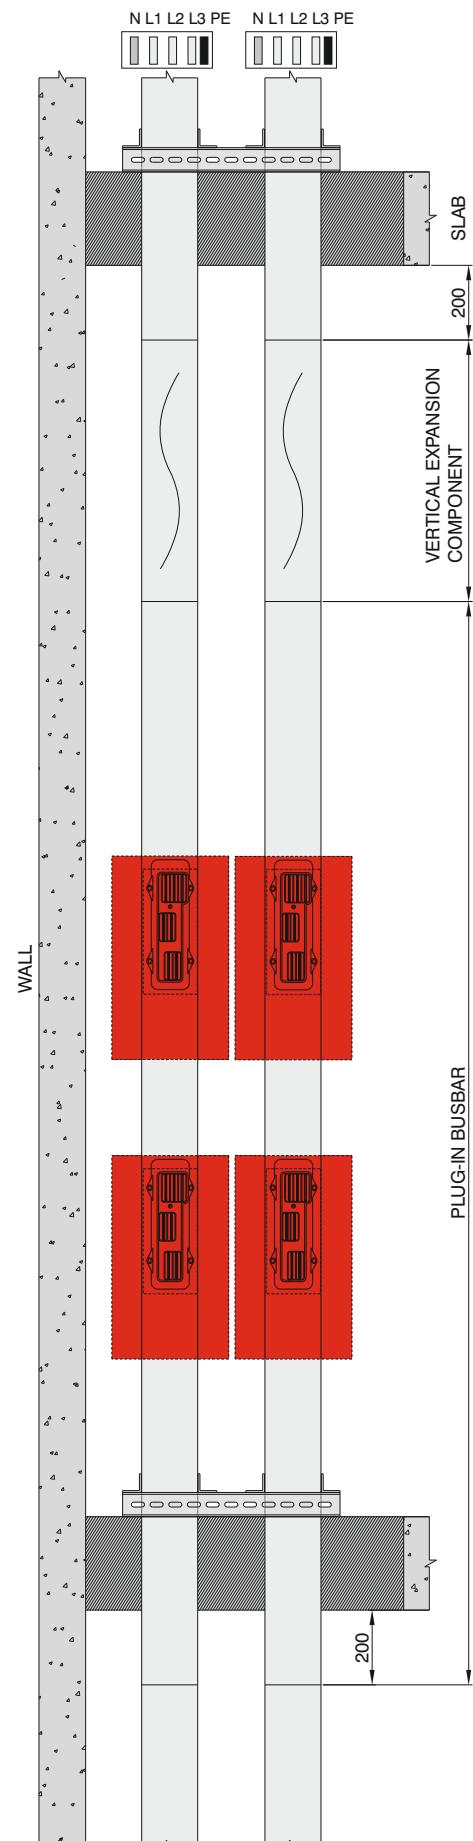


FIGURE-9 MINIMUM DIMENSIONS BETWEEN 2 RISERS

► Feeder Boxes (B10, B11)


Cable Gland Plates

Busbar Housing Type	Cable Gland Plate	Type
		1
		2
		3
		2
		3
		4

Ampere Ratings

KXA-II Al Conductor		KXC-II Cu Conductor		A	B	C	D	Gland Type
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	(mm)	(mm)	
-	-	650	06	500	520 / 620*	355	350	1
-	-	800	08	500	520 / 620*	355	350	1
630	06	-	-	500	520 / 620*	355	350	1
-	-	1000	10	500	520 / 620*	355	350	1
800	08	1250	12	500	520 / 620*	355	350	1
1000	10	-	-	500	520 / 620*	355	350	1
-	-	1350	14	500	520 / 620*	355	350	1
1250	12	1600	16	500	520 / 620*	355	350	1
-	-	2000	20	500	520 / 620*	355	350	1
1600	17	2250	21	500	520 / 620*	555	350	2
-	-	2500	25	500	520 / 620*	555	350	2
2000	20	-	-	500	520 / 620*	555	350	3
2500	27	-	-	500	520 / 620*	555	350	3
-	-	2250	24	500	520 / 620*	555	350	3
-	-	2750	28	500	520 / 620*	555	350	3
2350	21	3000	30	500	520 / 620*	555	350	3
2500	25	3300	32	700	520 / 620*	555	350	3
-	-	3600	36	700	520 / 620*	555	350	3
3000	32	4000	40	700	520 / 620*	555	350	3
3300	33	-	-	700	520 / 620*	770	550	3
-	-	5000	50	700	520 / 620*	770	550	4
4000	40	-	-	700	520 / 620*	770	550	4
5000	51	-	-	700	520 / 620*	770	550	4
-	-	6300	63	700	520 / 620*	950	550	4
6300	63	-	-	700	520 / 620*	950	550	4

*The values are given for 08 and 09 codes clean earth models.

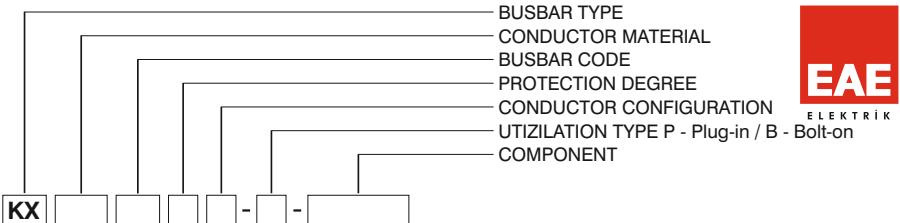


Feeder Box B10 - B 1 0

Sample Order:

3200 A, Aluminium, Bolt-on
4 conductors

KXA 32504 - B - B10

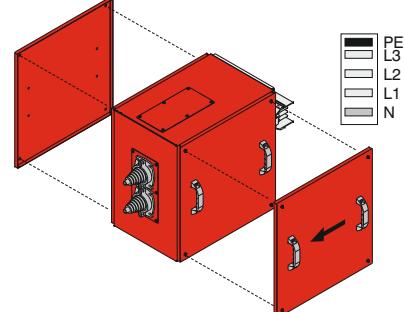


B10

Feeder Box B11 - B 1 1




Sample Order:

3600 A, Copper, Bolt-on, 4 conductors

KXC 36504 - B - B11

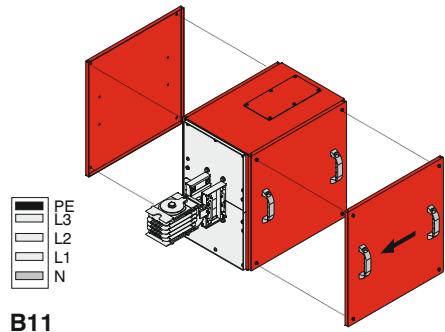

B11



■ The dimensions given above are minimum values

■ Please call us for special applications or for applications with MCCB's.

ELINE KX-II

► Feeder Boxes (Central Feeder Boxes BO)


Cable Gland Plates

Busbar Housing Type	Cable Gland Plate	Type
		1
		2
		3
		2
		3
		4

Ampere Ratings

KXA - Al Conductor		KXC - Cu Conductor		A	B	C	X	Gland Type
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	(mm)	(mm)	
-	-	650	06	500	520 / 620*	405	175	1
-	-	800	08	500	520 / 620*	405	175	1
630	06	-	-	500	520 / 620*	405	175	1
-	-	1000	10	500	520 / 620*	405	175	1
800	08	1250	12	500	520 / 620*	405	175	1
1000	10	-	-	500	520 / 620*	405	175	1
-	-	1350	14	500	520 / 620*	405	175	1
1250	12	1600	16	500	520 / 620*	405	175	1
-	-	2000	20	700	520 / 620*	805	277,5	1
1600	17	2250	21	700	520 / 620*	805	277,5	2
-	-	2500	25	700	520 / 620*	805	277,5	2
2000	20	-	-	700	520 / 620*	805	277,5	2
2500	27	-	-	700	520 / 620*	805	277,5	2
-	-	2250	24	700	520 / 620*	805	277,5	2
-	-	2750	28	700	520 / 620*	805	277,5	3
2350	21	3000	30	700	520 / 620*	805	277,5	3
2500	25	3300	32	700	520 / 620*	805	277,5	3
-	-	3600	36	700	520 / 620*	805	277,5	3
3000	32	4000	40	700	520 / 620*	805	277,5	3
3300	33	-	-	700	520 / 620*	805	385	3
-	-	5000	50	850	520 / 620*	1005	385	3
4000	40	-	-	850	520 / 620*	1005	385	3
5000	51	-	-	850	520 / 620*	1005	385	3
-	-	6300	63	850	520 / 620*	1005	385	4
6300	63	-	-	850	520 / 620*	1005	385	4

*The values are given for 08 and 09 codes clean earth models.
■ The dimensions given above are minimum values.



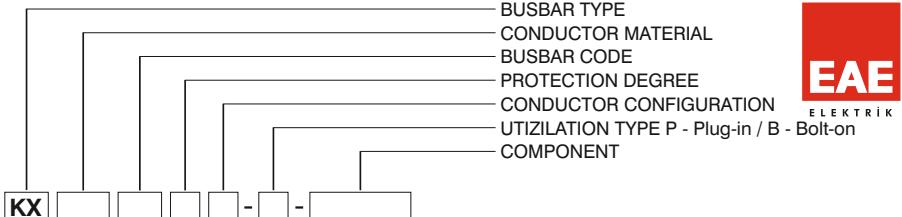


Central Feeder Box - B - O


Sample Order:

2500 A, Aluminium, Bolt-on
4conductors


KXA 25504 - B - BO

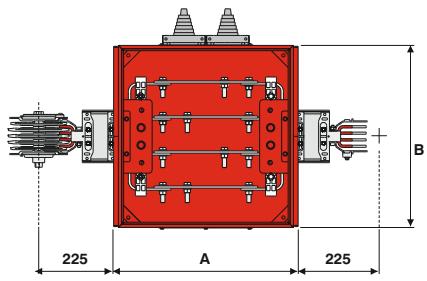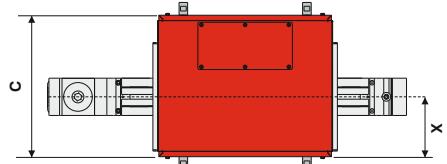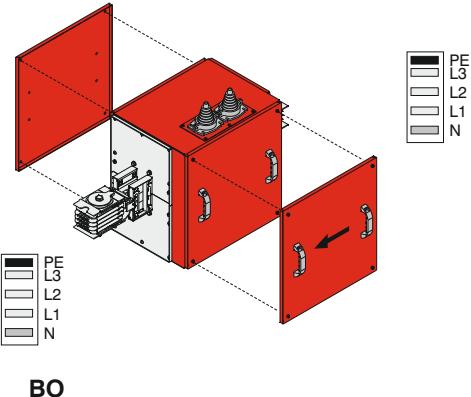

■ Please call us for special applications or for applications with MCCB's.

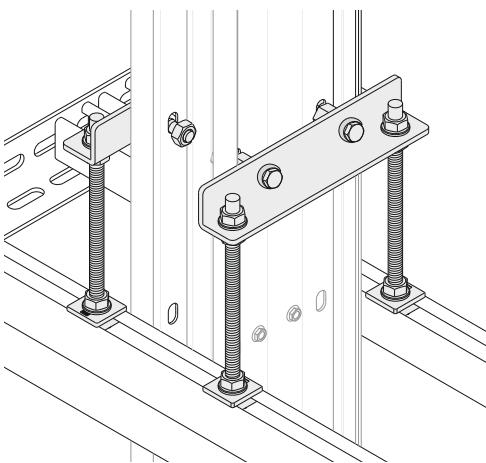


Supports

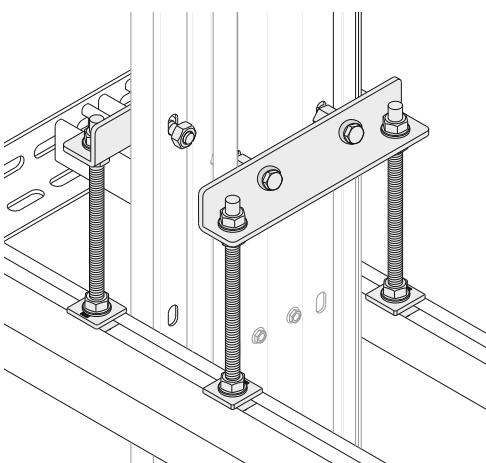


FIXING ELEMENTS



Description	Code
KX Vertical Riser Fixing Unit	3048475

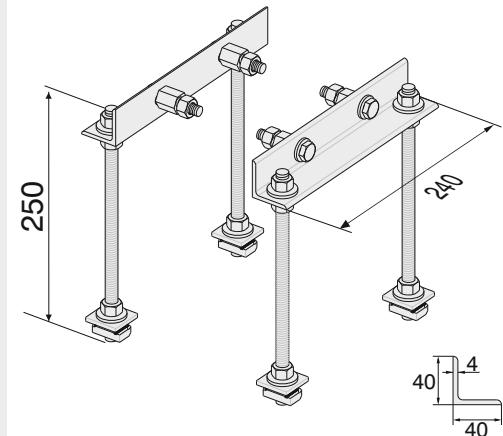


Description	Code
KX Vertical Riser Fixing Unit (Fire Barrier)	3048709

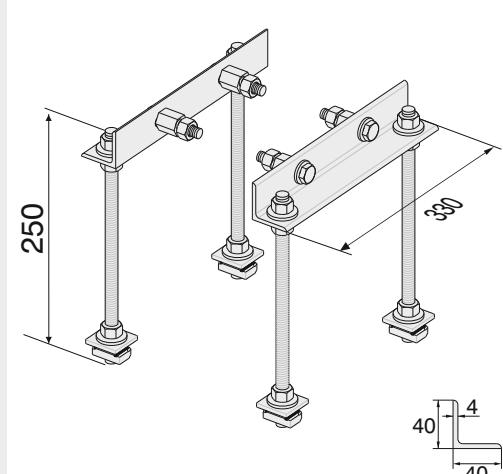



Description	Code
KX Fixing Clamp for Binrak(Unistrut) Channel	2011227

Description	Code
KX Fixing Clamp for Steel Angle Profile	2011226

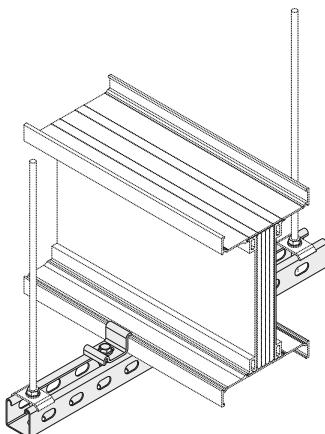


Supports


KX - BRA HANGER SET FOR EDGEWISE APPLICATION TO BINRAK (UNISTRUT) CHANNEL

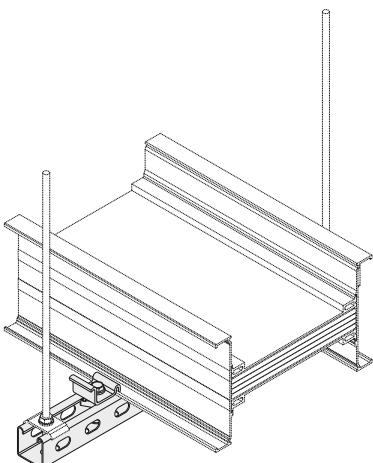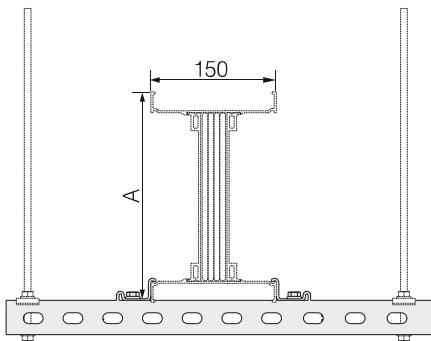


KX - BRA HANGER SET FOR FLATWISE APPLICATION TO BINRAK (UNISTRUT) CHANNEL

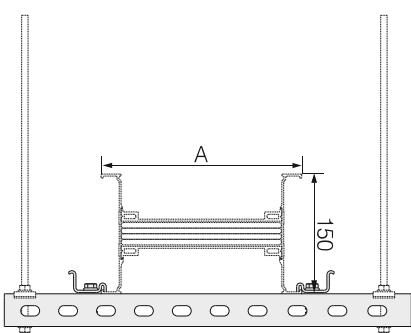



Al Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	350	77,5	
-	-	800	08		82,5	
630	06	-	-		91	
-	-	1000	10		96	
800	08	1250	12		106	
1000	10	-	-		111	
-	-	1350	14		121	3025372
1250	12	1600	16		131	
-	-	2000	20		161	
1600	16	2250	21		176	
-	-	2500	25		211	
2000	20	-	-		221	
2500	27	-	-		281	

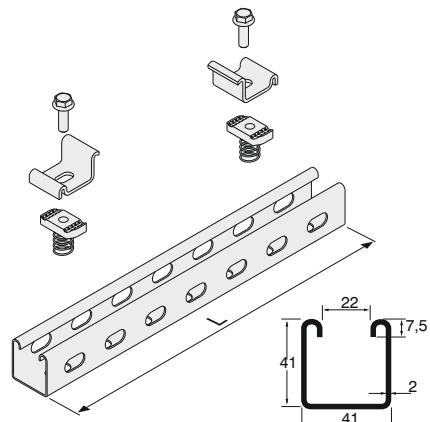

Al Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	300	77,5	
-	-	800	08		82,5	
630	06	1000	10		96	
800	08	1250	12		106	3025372
1000	10	-	-		111	
-	-	1350	14		121	
1250	12	1600	16		131	
-	-	2000	20		161	
1600	16	2250	21		176	3025373
-	-	2500	25		211	3025374
2000	20	-	-		221	
2500	27	-	-		281	3025375

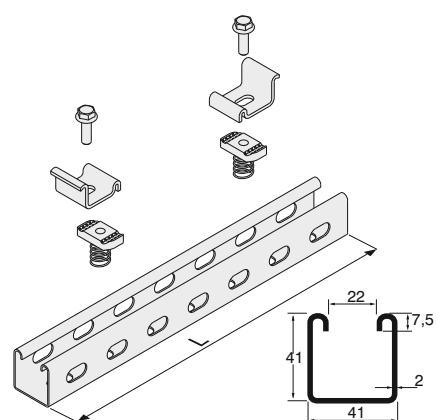


■ Please call us for non-standard components.

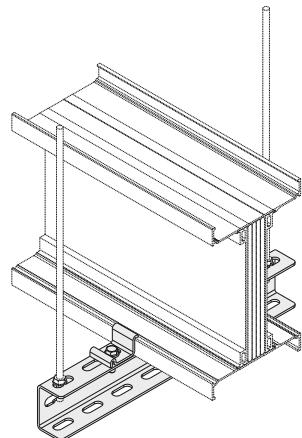



Supports

KX - UT HANGER SET FOR EDGEWISE APPLICATION TO NPU CHANNEL

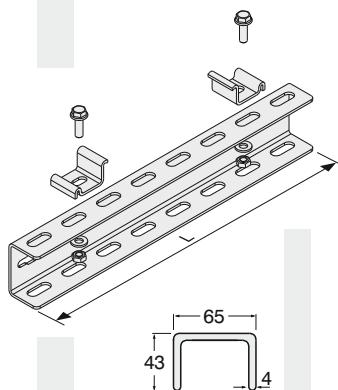


65
43 U 4

AI Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	77,5		
-	-	800	08	82,5		
630	06	-	-	91		
-	-	1000	10	96		
800	08	1250	12	106		
1000	10	-	-	111		
-	-	1350	14	121		
1250	12	1600	16	131		
-	-	2000	20	161		
1600	17	2250	21	176		
-	-	2500	25	211		
2000	20	-	-	221		
2500	27	-	-	281	3025348	
-	-	2250	24	202		
-	-	2750	28	232		
2350	21	3000	30	252		
2500	25	3300	32	282		
-	-	3600	36	312		
3000	32	4000	40	342		
3300	33	-	-	372		
-	-	5000	50	412		
4000	40	-	-	432		
5000	51	-	-	592		
-	-	6300	63	612		
6300	63	-	-	732		

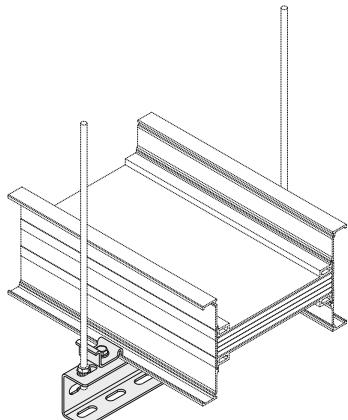


KX - UT HANGER SET FOR FLATWISE APPLICATION TO NPU CHANNEL

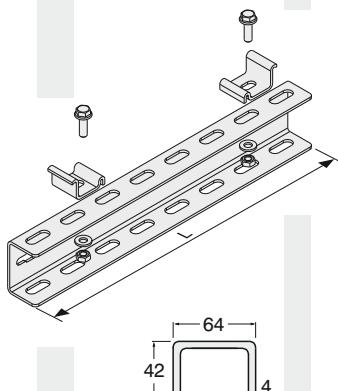

64
42 U 4



AI Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	77,5		
-	-	800	08	82,5		
630	06	-	-	91		
-	-	1000	10	96		
800	08	1250	12	106		
1000	10	-	-	111		
-	-	1350	14	121		
1250	12	1600	16	131		
-	-	2000	20	350	161	3025348
1600	17	2250	21	400	176	3025349
-	-	2500	25	450	211	3025350
2000	20	-	-	450	221	3025350
2500	27	-	-	400	281	3025349
-	-	2250	24	400	202	3025349
-	-	2750	28	450	232	3025350
2350	21	3000	30	450	252	3025350
2500	25	3300	32	500	282	3025351
-	-	3600	36	500	312	3025351
3000	32	4000	40	550	342	3025352
3300	33	-	-	550	372	3025352
-	-	5000	50	600	412	3025353
4000	40	-	-	700	432	3025354
5000	51	-	-	700	592	3025354
-	-	6300	63	800	612	3134130
6300	63	-	-	900	732	3025355

■ Please call us for non-standard components.

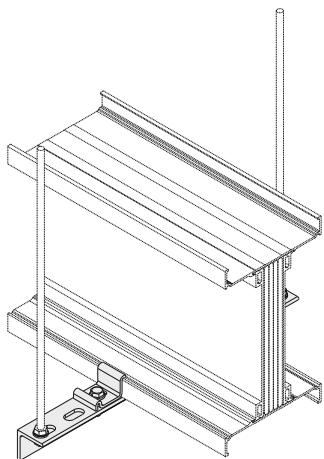



Supports
KX HANGER
SET FOR EDGEWISE
APPLICATION
TO STEEL ANGLE
PROFILE

Al Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	350	77,5	
-	-	800	08		82,5	
630	06	-	-		91	
-	-	1000	10		96	
800	08	1250	12		106	
1000	10	-	-		111	
-	-	1350	14		121	3025344
1250	12	1600	16		131	
-	-	2000	20		161	
1600	16	2250	21		176	
-	-	2500	25		211	
2000	20	-	-		221	
2500	27	-	-		281	


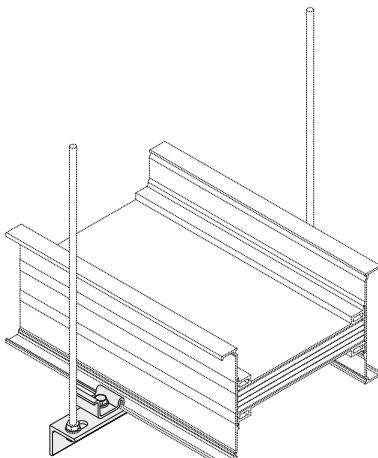
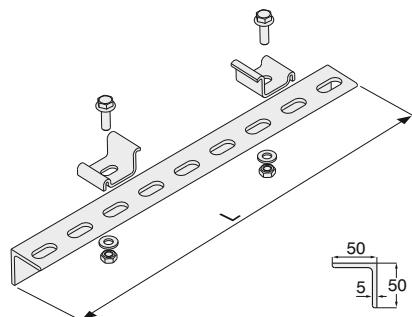


KX HANGER
SET FOR FLATWISE
APPLICATION
TO STEEL ANGLE
PROFILE

Al Conductor		Cu Conductor		L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)	(mm)	
-	-	650	06	300	77,5	
-	-	800	08		82,5	
630	06	-	-		91	
-	-	1000	10		96	
800	08	1250	12		106	
1000	10	-	-		111	
-	-	1350	14		121	
1250	12	1600	16		131	3025343
-	-	2000	20		161	3025344
1600	16	2250	21		176	3025345
-	-	2500	25		211	
2000	20	-	-		221	
2500	27	-	-		281	3025346


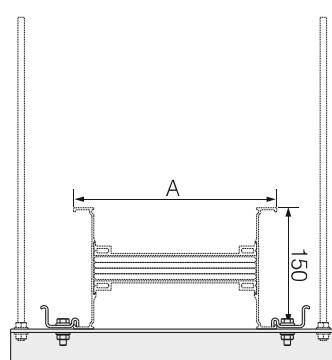
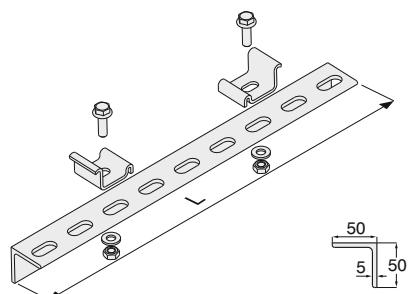


■ Please call us for non-standard components.

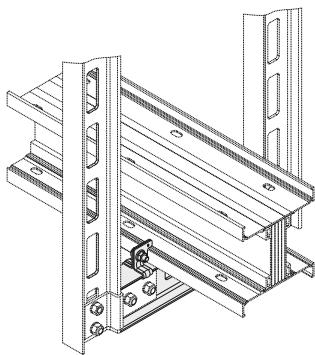


Supports

KX - IDY TWO-WAY FOR EDGEWISE APPLICATION TO NPI CHANNEL

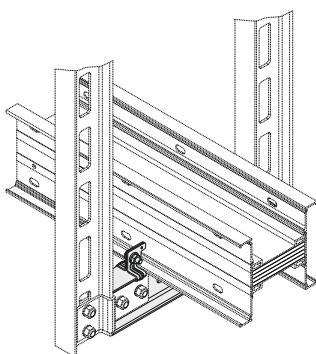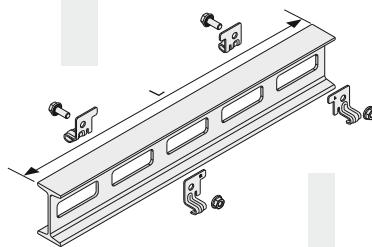

KX - IDY TWO-WAY FOR FLATWISE APPLICATION TO NPI CHANNEL

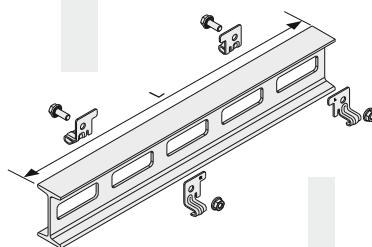


Description		Code
KX IDY Support Set		2054590

AI Conductor	Cu Conductor	L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)
-	-	650	06	77,5
-	-	800	08	82,5
630	06	-	-	91
-	-	1000	10	96
800	08	1250	12	106
1000	10	-	-	111
-	-	1350	14	121
1250	12	1600	16	131
-	-	2000	20	161
1600	17	2250	21	176
-	-	2500	25	211
2000	20	-	-	221
2500	27	-	-	281
-	-	2250	24	202
-	-	2750	28	232
2350	21	3000	30	252
2500	25	3300	32	282
-	-	3600	36	312
3000	32	4000	40	342
3300	33	-	-	372
-	-	5000	50	412
4000	40	-	-	432
5000	51	-	-	592
-	-	6300	63	612
6300	63	-	-	732


AI Conductor	Cu Conductor	L	A	Order Code
Rated Current	Busbar Code	Rated Current	Busbar Code	(mm)
-	-	650	06	77,5
-	-	800	08	82,5
630	06	-	-	91
-	-	1000	10	96
800	08	1250	12	106
1000	10	-	-	111
-	-	1350	14	121
1250	12	1600	16	131
-	-	2000	20	161
1600	17	2250	21	176
-	-	2500	25	211
2000	20	-	-	400
2500	27	-	-	500
-	-	2250	24	300
-	-	2750	28	400
2350	21	3000	30	252
2500	25	3300	32	282
-	-	3600	36	500
3000	32	4000	40	312
3300	33	-	-	372
-	-	5000	50	600
4000	40	-	-	412
5000	51	-	-	432
-	-	6300	63	592
6300	63	-	-	612
				900
				732

■ Please call us for non-standard components.

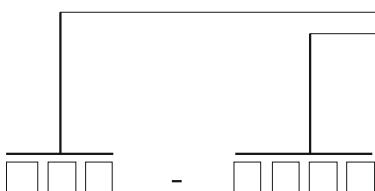


Supports

IDY

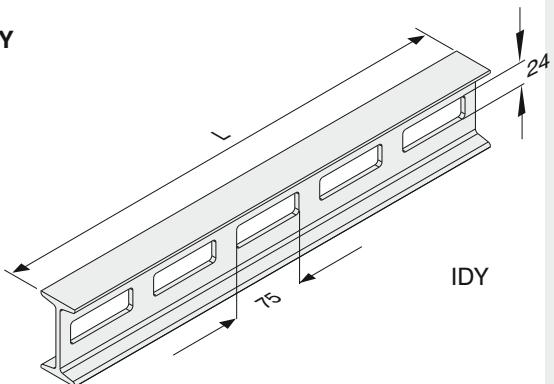


IDY

IDD

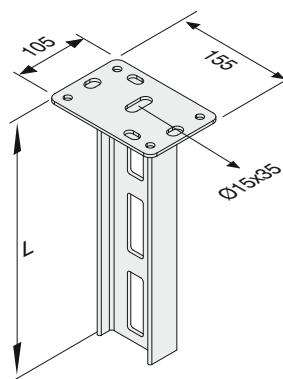

IDD


IDT

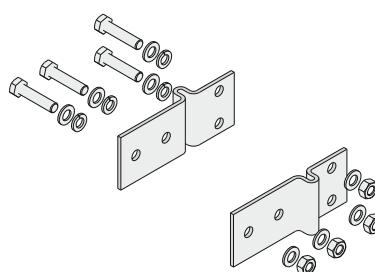


IDT

Description	L (mm)	Code
IDY 300	300	3008242
IDY 400	400	3008290
IDY 500	500	3008289
IDY 600	600	3008288
IDY 700	700	3008287
IDY 800	800	3008286
IDY 900	900	3008285
IDY 1000	1000	3008284
IDY 1100	1100	3008283
IDY 1200	1200	3008282
IDY 1300	1300	3008236
IDY 1400	1400	3008281
IDY 1500	1500	3008280
IDY 1600	1600	3008241
IDY 1700	1700	3008240
IDY 1800	1800	3008239
IDY 1900	1900	3008238
IDY 2000	2000	3008237
IDD 300	300	3008314
IDD 400	400	3008313
IDD 500	500	3008312
IDD 600	600	3008311
IDD 700	700	3008310
IDD 800	800	3008309
IDD 900	900	3008308
IDD 1000	1000	3008307
IDD 1100	1100	3008306
IDD 1200	1200	3008305
IDD 1300	1300	3008304
IDD 1400	1400	3008303
IDD 1500	1500	3008302
IDD 1600	1600	3008301
IDD 1700	1700	3008300
IDD 1800	1800	3008299
IDD 1900	1900	3008298
IDD 2000	2000	3008297


IDT Support Fitting - 3008279

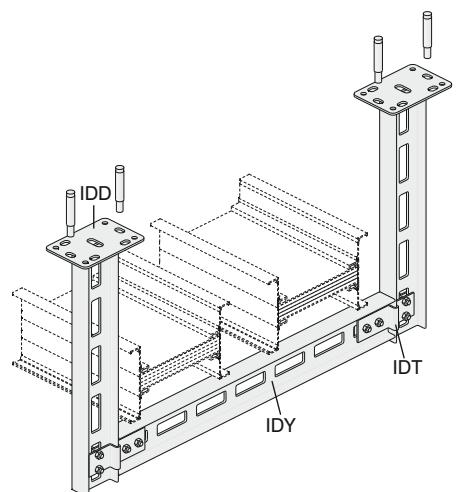

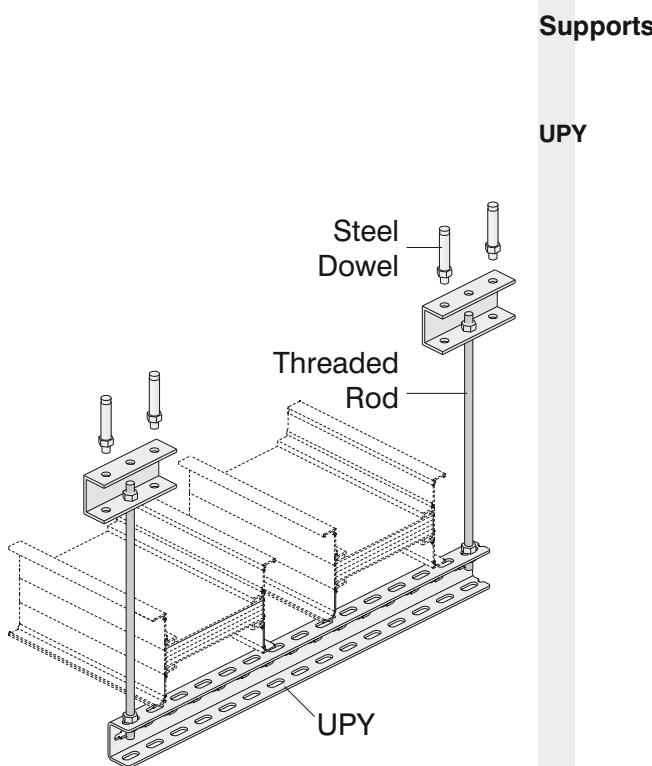


Supports

UPY


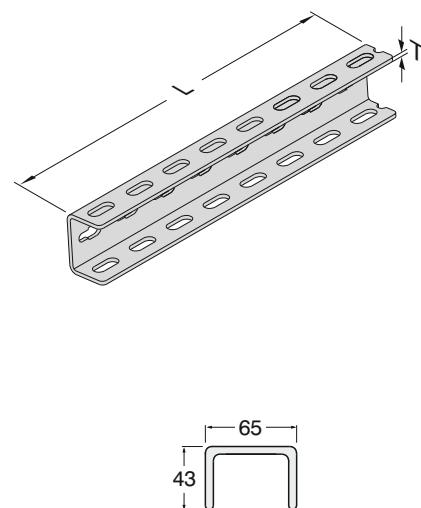


Description	T (mm)	L (mm)	Code
UPY 300	4	300	3004487
UPY 400	4	400	3004489
UPY 500	4	500	3004491
UPY 600	4	600	3004493
UPY 700	4	700	3004495
UPY 800	4	800	3004496
UPY 900	4	900	3004497
UPY 1000	4	1000	3004498
UPY 1100	4	1100	3004499
UPY 1200	4	1200	3004500
UPY 1500	4	1500	3004503

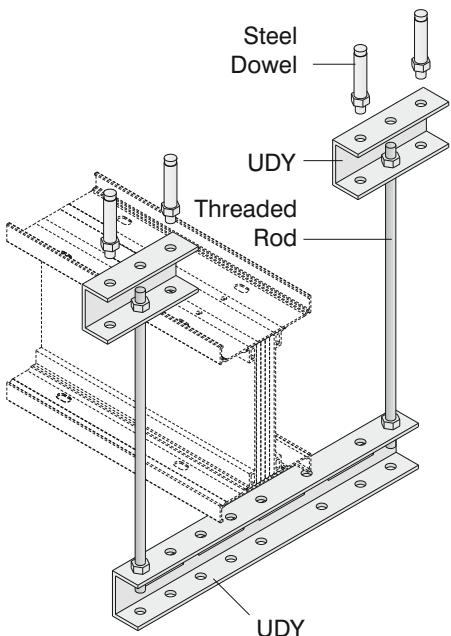

Supports

UDY

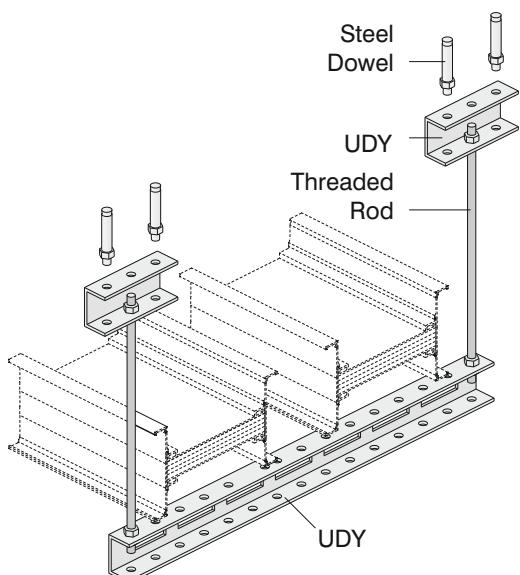
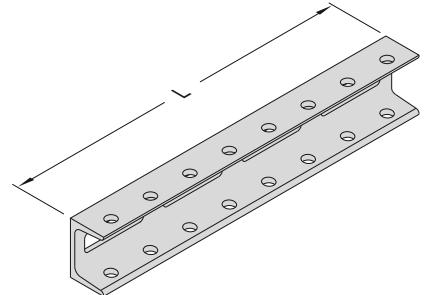


Description	L (mm)	Code
UDY 300	300	3008023
UDY 400	400	3008024
UDY 500	500	3008025
UDY 600	600	3008026
UDY 700	700	3008027
UDY 800	800	3008028
UDY 900	900	3008029
UDY 1000	1000	3008030
UDY 1100	1100	3008031
UDY 1200	1200	3008032
UDY 1300	1300	3008033
UDY 1400	1400	3008034
UDY 1500	1500	3008035
UDY 1600	1600	3008036
UDY 1700	1700	3008037
UDY 1800	1800	3008038
UDY 1900	1900	3008039
UDY 2000	2000	3008040

■ Please call us for non-standard components.


► Fixing Elements

ORDER CODE
LENGTH L (mm)

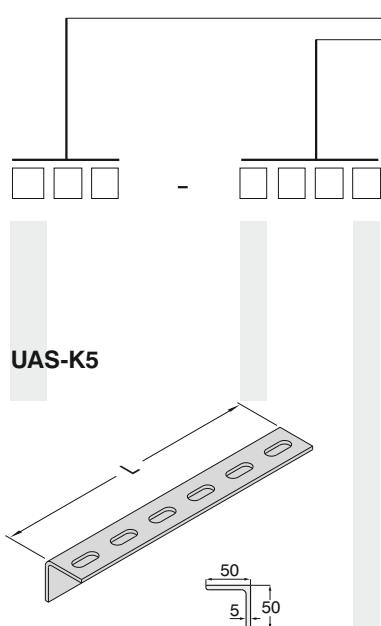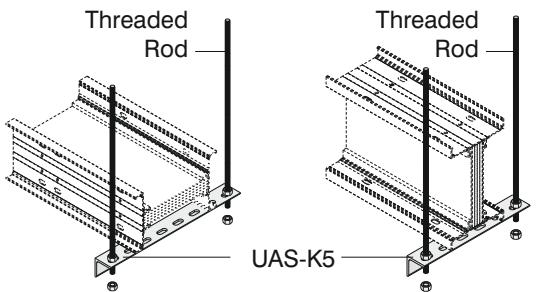

Supports

Description	L (mm)	Code
UAS-K5 SUPPORT (1)	200	3005324
UAS-K5 SUPPORT (2)	250	3005323
UAS-K5 SUPPORT (3)	300	3005322
UAS-K5 SUPPORT (4)	350	3005321
UAS-K5 SUPPORT (5)	400	3005320
UAS-K5 SUPPORT (6)	500	3005319
UAS-K5 SUPPORT (7)	600	3005318
UAS-K5 SUPPORT (8)	700	3005317
UAS-K5 SUPPORT (9)	1100	3005316



Threaded Rod



Extension Unit



Steel Dowel

Diameter of the
hole to be drilled

M10.....Ø14


M12.....Ø16



Steel Nut



Washer

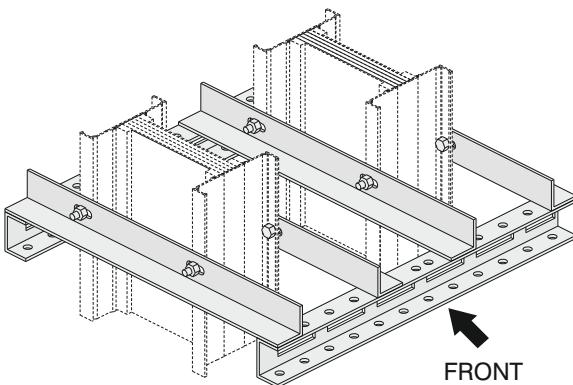


Vertical Riser Application
Sample Order Hanging
(Special to project)

Connection Units

Description	L (mm)	Code
BRA 12-05 Threaded Rod (M10)	500	5000037
BRA 12-10 Threaded Rod (M10)	1000	5000032
BRA 14-05 Threaded Rod (M12)	500	5000026
BRA 14-10 Threaded Rod (M12)	1000	5000034
BRA 13 Extension Unit (M10)	-	1004312
BRA 13 Extension Unit (M12)	-	1004282
BRA 9 Steel Dowel (M10)	-	5000023
BRA 9 Steel Dowel (M12)	-	5000022
M10 Steel Nut	-	1000522
M12 Steel Nut	-	1000964
M10 Washer	-	1000504
M12 Washer	-	1000505

►Joint Structure

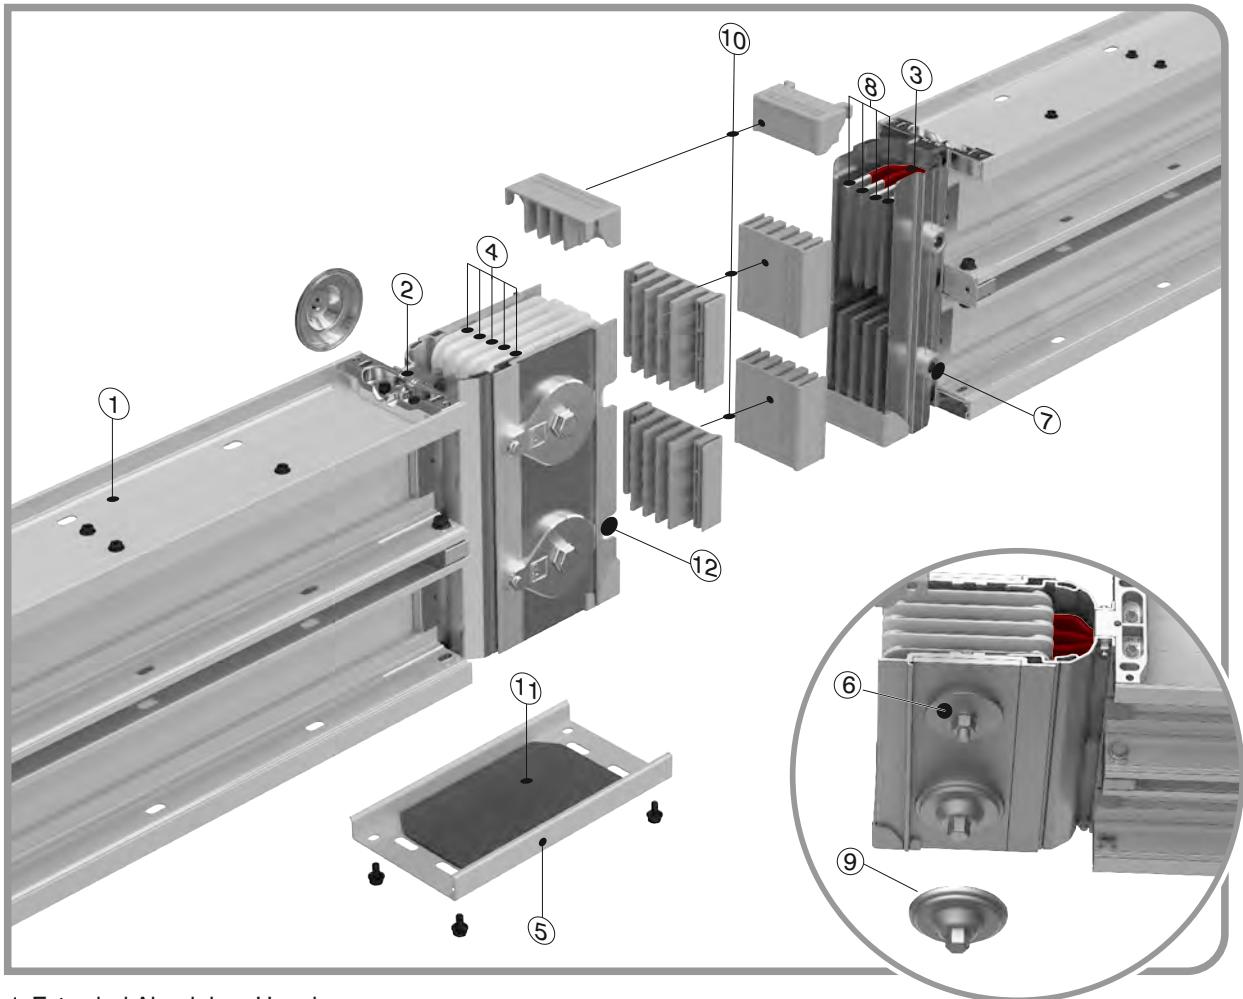

1- Extruded Aluminium Housing

2- PE Fixing Piece

3- Insulation Layers (Epoxy+B class polyester film)

4- Joint Insulators

5- Joint Cover

6- Belleville

7- Alignment Pin (removable)

8- Conductors

9- IP55 Nut Locking Piece

10- Protection Plastic

11- IP55 Joint Cover Gasket

12- Alignment Pin Slot



Figure 3

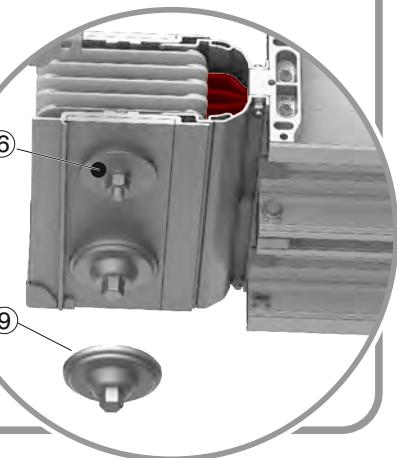


Figure 4

Joint assembly




Figure 5

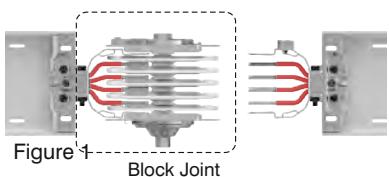


Figure 1
Block Joint

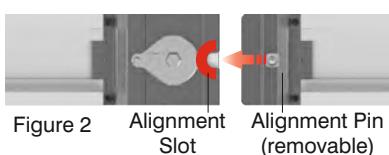


Figure 2 Alignment Slot Alignment Pin (removable)





Figure 6



The joint cover is closed by leverage.


Please check related installation manual for details.


►Measuring a Special Length

After installation of standard busbar 3m lengths, you will be in need of special lengths which are smaller than 3m. The minimum length for these special elements can be 35 cm. Please measure the lengths of these modules as shown below.


Length A is measured between housing of 2 busbars in cm. A. The special length is calculated by deducting 25 cm from this measured length.

X=A-25 (cm) X=Length of Special Busbar (The busbar module will be manufactured as per X value.)

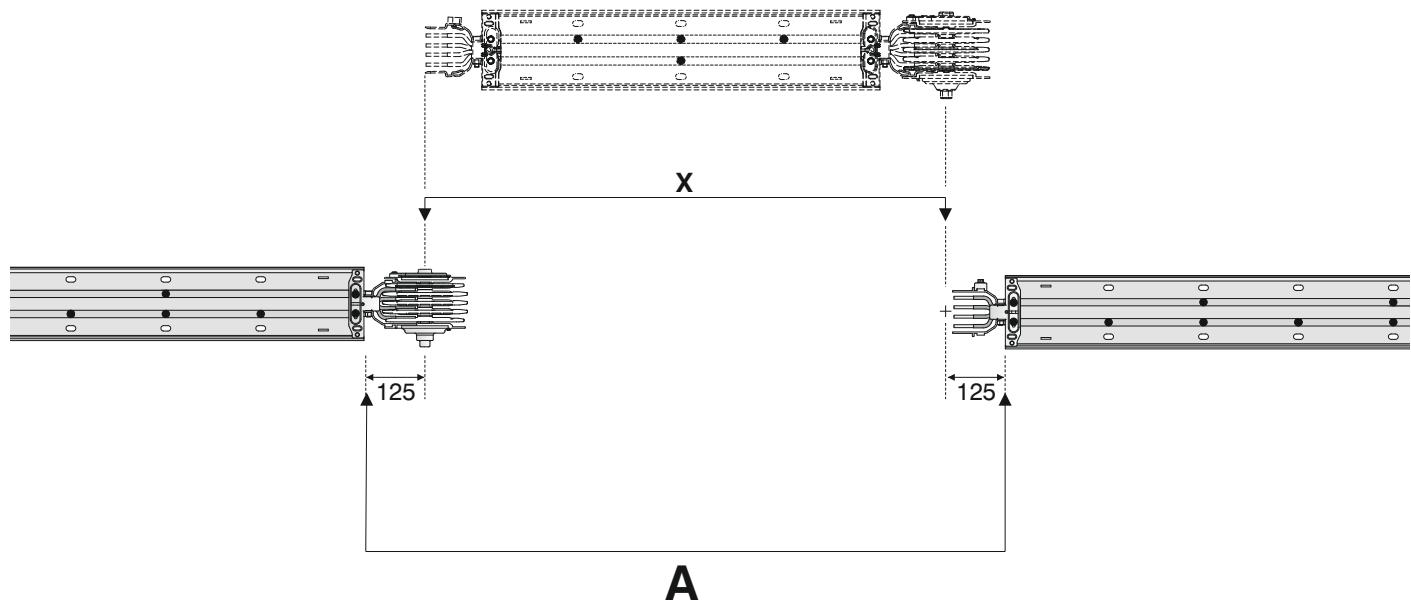


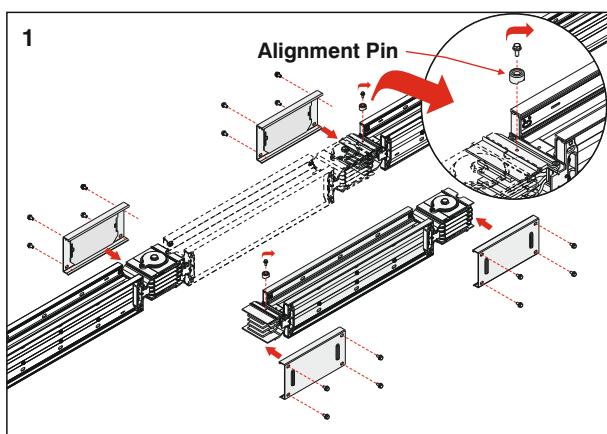


1- Remove Alignment Pin on the busbar, without block joint.

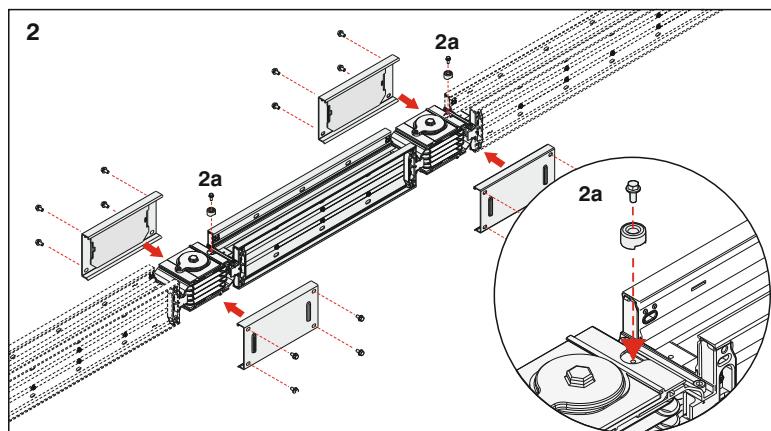


2- Insert the piece aligning conductors correctly. Fix back the Alignment pin.

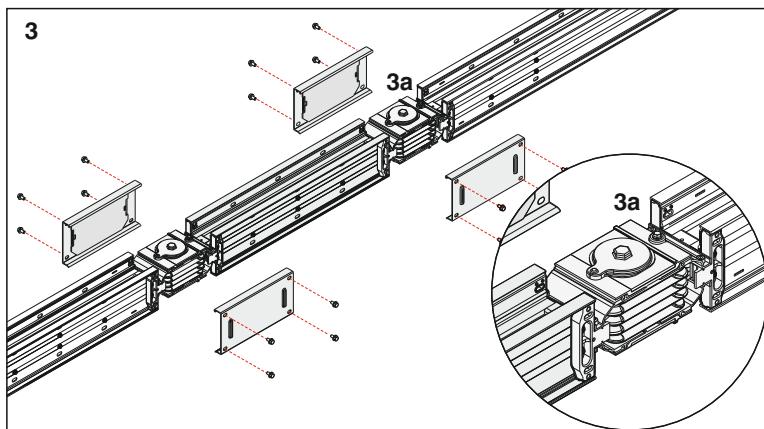


3- Make sure busbar piece is aligned according to alignment pin.

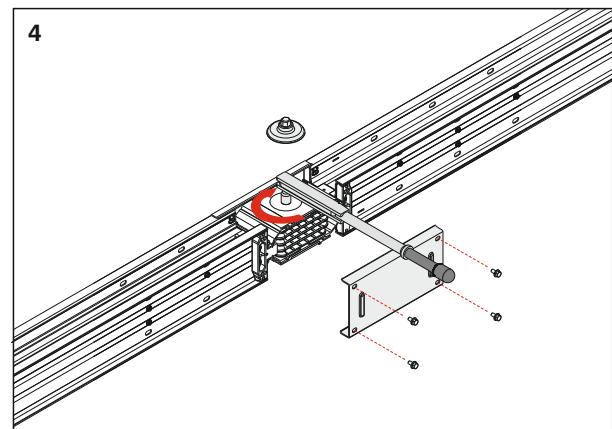

4- Fix one of the joint cover to stabilize joint. Apply 83Nm to the main bolt.

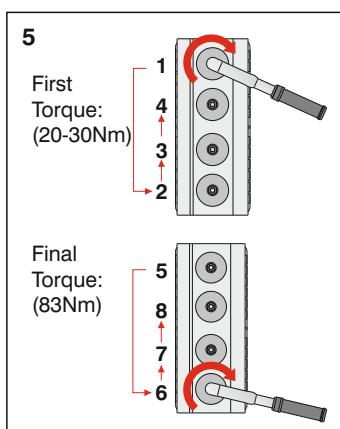

5- If there are more than one bolt for the same phase, bolts shall be tightened by hand approximately 20-30Nm as per above sequence, then 83Nm shall be applied at final torque with the same sequence.

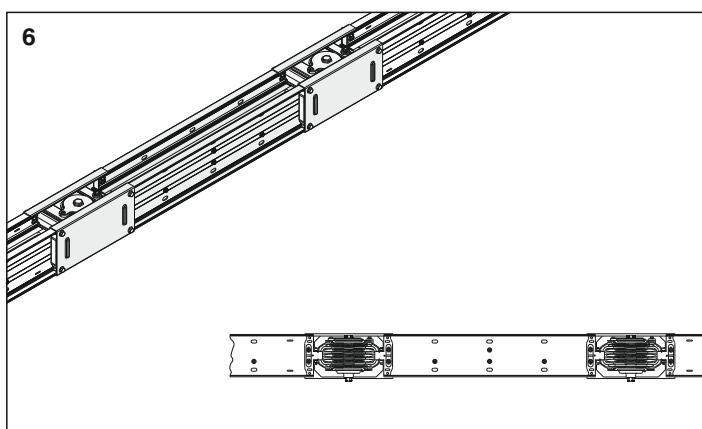

6- Fix the remaining joint cover.
Joint installation is completed.

Note: If the final joint cover does not close correctly, it indicates the busbar is not completely aligned. Release the bolts and reapply the sequence from figure 4 to complete the joint.

Please check related installation manual for details.

CE DECLARATION OF CONFORMITY

Product Group E-Line KX-II Busbar Energy Distribution System

Manufacturer EAE Elektrik Asansor End. Insaat San. ve Tic. A.S.
Akcaburgaz Mahallesi, 3114. Sokak,
No:10 34522 Esenyurt-Istanbul

The objects of the declaration described below is in conformity with the relevant Union harmonisation legislation. This declaration of conformity is issued under the sole responsibility of the manufacturer.

Standard :

EN 61439-6

Low-voltage switchgear and controlgear assemblies - Part 6: Busbar trunking systems

IEC 61439-6

Low-voltage switchgear and controlgear assemblies - Part 6: Busbar trunking systems (busways)

CE - Directive

2014/35/EU "The Low Voltage Directive"

2014/30/EU "Electromagnetic Compatibility (EMC) Directive"

2011/65/EU "Restriction of the use of certain hazardous substances (RoHS)"

Technical Document Preparation Official:

EAE Elektrik Asansor End. Insaat San. ve Tic. A.S.
Akcaburgaz Mahallesi, 3114. Sokak, No:10 34522 Esenyurt-Istanbul


Emre GÜRLEYEN

Date

20.04.2016

Document Authorized Signatory

Elif Gamze KAYA OK
Deputy General Manager



CERTIFICATE

EAE Elektrik A
Insaat San. ve Tic. A.S.
Akçaburgaz Mahallesi 3114, Sokak No: 10
34510 Esenyurt / İstanbul
Turkey

Low-voltage busbar

EAE

KXC-II 06507,
KXC-II 16507,
KXC-II 30507,
KXC-II 63507

I_{nc} 650 A up to
 I_{cw} 60 kA – 1 s
For more detail

Manufactured by:

EAE Elektrik Asansör Endüstri
Insaat San. ve Tic. A.S.
Akçaburgaz Mahallesi 3114 Sokak No: 10
34510 Esenyurt
Turkey

Design verification

IEC 61439-6: 2
Clauses: 10.2,

KXC-II xx507 t
Busbar trunking

Site is granted on acc
. 2225937.01-INC, c

07, KXC-II 12507, I
07, KXC-II 24507, I
07, KXC-II 40507, I

100 V, U_{imp} 12 kV, IF
ed types in the range

.10, 10.11 and Annex

% PE and trunking
e, joint and straight

DEKRA, the result

The examination has been carried out on one single specimen of the product, submitted by the manufacturer. The Attestation does not include an assessment of the manufacturer's production. Conformity of his production with the specimen tested by DEKRA is not the responsibility of DEKRA.

TEST CERTIFICATE

2018

TEST CERTIFICATE

17.100

TEST CERTIFICATE

of this certificate and adj

DEKRA Certification B.V. Meander 1051, 6825 MJ Arnhem P.O. Box 5185, 6802 ED Arnhem, The Netherlands
T +31 88 96 83000 F +31 88 96 83100 www.dekra-certification.com Company registration 09085396

630A ... 6300A COMPACT BUSBAR PRODUCT OVERVIEW (E-LINE KX-II)

1- Standards & Certification:

- Busbar system shall be designed and manufactured as per IEC 61439-6 standard, which requires below listed tests. Each busbar rating shall have a separate type test certificate from an independent internationally accredited laboratory including below tests:
 - 10.2- Strength of material and parts, 10.2.2- Resistance to corrosion, 10.2.3- Properties of insulating materials, 10.2.3.1- Verification of thermal stability of enclosures, 10.2.3.2- Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects, 10.2.6- Mechanical impact, 10.2.7- Marking, 10.2.101-Ability to withstand mechanical loads , 10.2.101.1- Test procedure for a straight busbar trunking unit, 10.2.101.2- Test procedure for a joint, 10.2.101.3- Resistance of the enclosure to crushing, 10.3- Degree of protection of assembly, 10.4- Clearances and creepage distances, 10.5- Protection against electric shock and integrity of protective circuits, 10.5.2- Effective earth continuity between the exposed conductive parts of the assembly and the protective circuit, 10.5.3- Short-circuit withstand strength of the protective circuit, 10.9- Dielectric properties, 10.9.2- Power-frequency withstand voltage, 10.9.3- Impulse withstand voltage, 10.10- Verification of temperature rise, 10.11- Short- circuit withstand strength, 10.101- Resistance to flame propagation, 10.102- Fire resistance in building penetrations, Annex BB Phase conductor characteristics, Annex CC Fault-loop zero-sequences impedances, Annex DD Fault-loop resistances and reactances.
- Busbar system shall have CE marking.
- The manufacturer of busbar system shall have ISO 9001 and ISO 14001 certification.
- Each product shall have a "Type Label" including coding system, which identifies the brand, type of the unit, number of conductors and electrical details. The same coding shall be on the related certificate and catalogue.

2- Electrical Characteristics

- Busbar systems nominal insulation voltage shall be 1000 V.
- As per ampere rates, minimum short circuit values shall be as given below;

For Aluminium Conductors;	630A :1 sec/rms 25kA, Peak 52,5kA
800-1000A	:1 sec/rms 35kA, Peak 74kA
1250A	:1 sec/rms 50kA, Peak 105kA
1600A	:1 sec/rms 70kA, Peak 154kA
2000-2350-2500-3000-3300A	:1 sec/rms 100kA, Peak 220kA
4000A and above	:1 sec/rms 120kA, Peak 264kA

For Copper Conductors;	650A :1 sec/rms 24kA, Peak 50,4kA
800A	:0,3 sec/rms 50kA, Peak 105kA
1000A	:1 sec/rms 50kA, Peak 105kA
1250A	:1 sec/rms 60kA, Peak 132kA
1350A	:1 sec/rms 75kA, Peak 165kA
1600-1900A	:1 sec/rms 85kA, Peak 187kA
2000A-2250-2500A	:1 sec/rms 100kA, Peak 220kA
2250-2750A	:1 sec/rms 110kA, Peak 242kA
3000A	:1 sec/rms 150kA, Peak 330kA
3300A and above	:1 sec/rms 180kA, Peak 396kA

2.1- Housing

- Busbar system shall have "Sandwich-Compact" structure. Conductors shall be packed and placed into the housing without leaving air gap in order to provide low reactance.
- Housing shall be made of thermal processed, extruded aluminium, RAL7038-Electrostatic painted.
- Compact structure of the housing shall be provided by M6 screws applied at every 19cm along the entire length.
- The sandwich-compact structure shall continue at the plug-in points too. There shall not be air gap between conductors at the plug-in points.

2.2- Conductors

- Aluminium or Copper conductors shall be epoxy coated and tin plated at the joints upon the wire configuration and required numbers, which are described below.
- Compact busbar system shall have aluminium conductors between 630A – 6300A.
- Compact busbar system shall have copper conductors between 650A – 6300A.
- Compact busbar system shall have the following number of conductors and wire configuration;
 - 4 ½ Conductors: (4 full size conductors + PE (50% earth conductor + housing)),
 - 5 Conductors: (5 full size conductors + PE (100% earth conductor + housing)),
 - 6 Conductors: (6 full size conductors + CPE (100% earth conductor + housing)),
- Phase conductors and neutral conductor shall have the same cross-section and they shall be insulated.
- Aluminium conductors shall be of EC grade aluminium. Minimum conductivity shall be 34m/mm².Ω.
- Copper conductors shall be minimum 99,95% electrolytic copper. Minimum conductivity shall be 56m/mm².Ω.

2.3- Insulation

- Insulation system shall be suitable for 1.000V continuous operation. Conductors shall be minimum thermo-set epoxy coated. Conductor size shall be designed so that temperature rise on the conductors shall not exceed 100C degree at nominal current, which helps to global heating problem. With this reason, insulation class shall be "B class".

2.4- Joint Structure

- Electrical and mechanical connection shall be made by placing conductor joints into the joint blocks of the connected conductors and followed by tightening and fastening of the joint bolts.

2.5- Protection

- Protection degree of the housing and joints shall be IP55/IP65 and IP67.
- IP65 and IP67 are not recommended for outdoor applications. Please check CR catalog.

2.6- Accessories

- Busbar system shall have all necessary accessories (elbows, offsets, panel-transformer connections, reductions, etc.) Manufacturer shall supply special dimensioned units in short time, if the project conditions requires.
- For horizontal runs, a horizontal expansion unit shall be used at every 40m and expansion points of the building.
- For vertical applications, a vertical expansion unit shall be used at every floor. Busbar system shall be rigidly fixed by supports at every floor.

3- Tap Off Boxes

- Both, Feeder and Plug-in busbar systems shall be suitable for bolt-on type tap off box connections at the joints up to 1.000A.
- Bolt-on tap off boxes shall be installed to the joints without changing or adding any piece. Bolt-on tap off boxes shall be able to be moved between different rated busbars.
- Plug-In busbars shall have minimum 2 plug-in points on each 300cm length. Plug-in tap off box sizes shall be up to 630A. Unused plug-in points shall have covers, which can provide IP55 protection degree.
- Plug-in tap off boxes shall be suitable to install or removed from busbars without switching off the power on the busbar.
- Contacts of plug-in tap off box shall be plated by silver.
- Tap off boxes shall be manufactured of sheet steel and epoxy painted RAL3020 colour.
- Plug-in tap off boxes shall have electromechanical safety interlock system. Which means;
 - a-) Electromechanical interlock mechanism shall ensure that the tap off box cannot be removed mechanically from the busbar, when the switch is at "ON" position.
 - b-) Electromechanical interlock mechanism shall ensure that, cover of the box can be opened only, when the switch is at "OFF" position.
 - c-) When the cover is opened, inside protection degree shall be minimum IP2X against accessing to live conductors.
 - d-) While inserting the contacts of plug-in tap off box, earth contact shall make the first touch. While removing, it shall be disconnected last.
- Tap off boxes shall be suitable for any brand of MCCBs. Electromechanical interlock mechanism shall be suitable for all these MCCBs too.

4- Installation and Commissioning

- Busbar systems shall be installed as per Single-Line drawings respect to required ampere rates and manufacturer installation guide (torque values, lockers, etc.). Electrical installator shall run an insulation test after installation according to manufacturers test procedures. The results of the test shall be reported to the manufacturer. Minimum insulation value shall be 1 Mohm.

Component List			Prepared by
Item	Component	Quantity	Name : _____
			Company : _____
			Project : _____
			Project No : _____
			Date : _____
			Signature : _____

Please duplicate this page for your own use.

PRODUCT TYPES



BUSBAR ENERGY DISTRIBUTION SYSTEMS



CABLE TRAYS



TROLLEY BUSBAR ENERGY DISTRIBUTION SYSTEMS



INDOOR SOLUTIONS



SUPPORT SYSTEMS

Please visit our website for the updated version of our catalogues.
www.eaelectric.com



EAE Elektrik A.S.
Head Office
Akcaburgaz Mahallesi,
3114. Sokak, No:10 34522
Esenyurt - Istanbul - TURKEY
Tel: +90 (212) 866 20 00
Fax: +90 (212) 886 24 20

EAE DL 3 Factory
Busbar
Makine İhtisas Organize Sanayi
Bolgesi Mahallesi, 6. Cadde,
8. Sokak, No:6 41455
Dilovası - Kocaeli - TURKEY
Tel: +90 (262) 502 05 65
Fax: +90 (262) 502 05 70

Please visit our website for the updated version of our catalogues.
www.eaeelectric.com



IEC 61439-6



Catalogue 47-Eng. / Rev 03 500 pcs. 26/11/2021

S.S

EAE has full right to make any revisions or changes on this catalogue without any prior notice.

