

E-LINE BR


CABLE SUPPORT SYSTEMS




Binrak Strut Support System







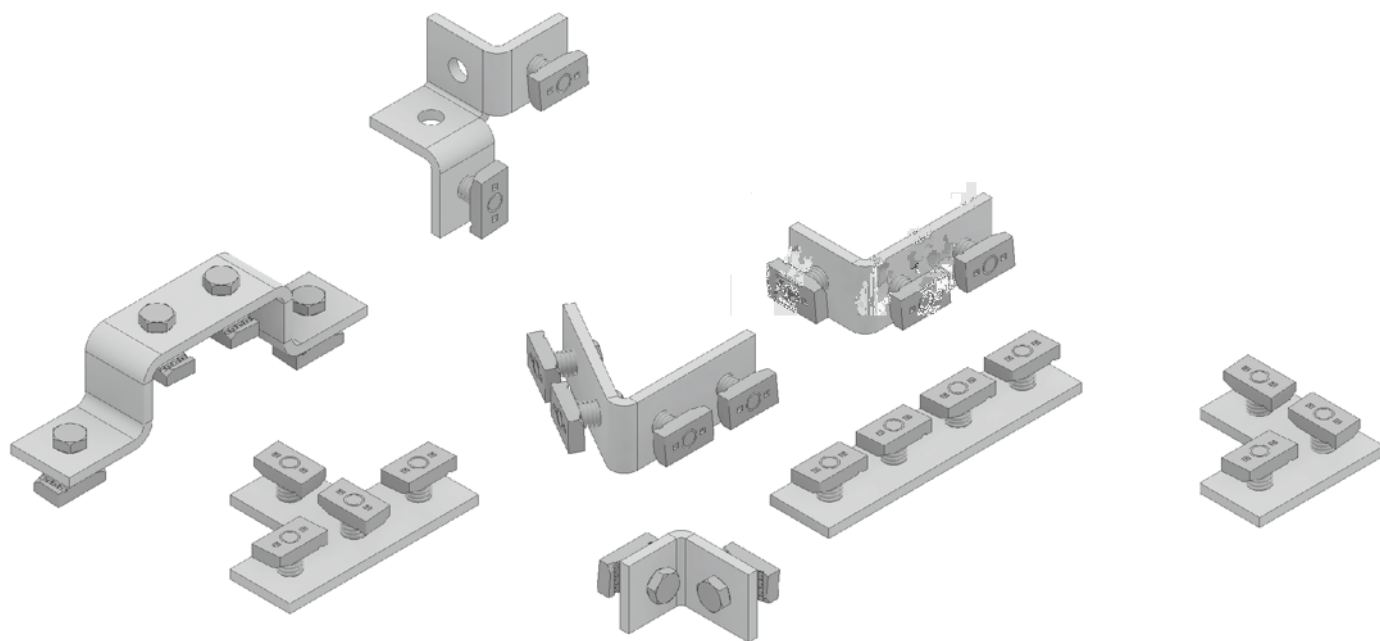

CABLESUPPORTSYSTEMS

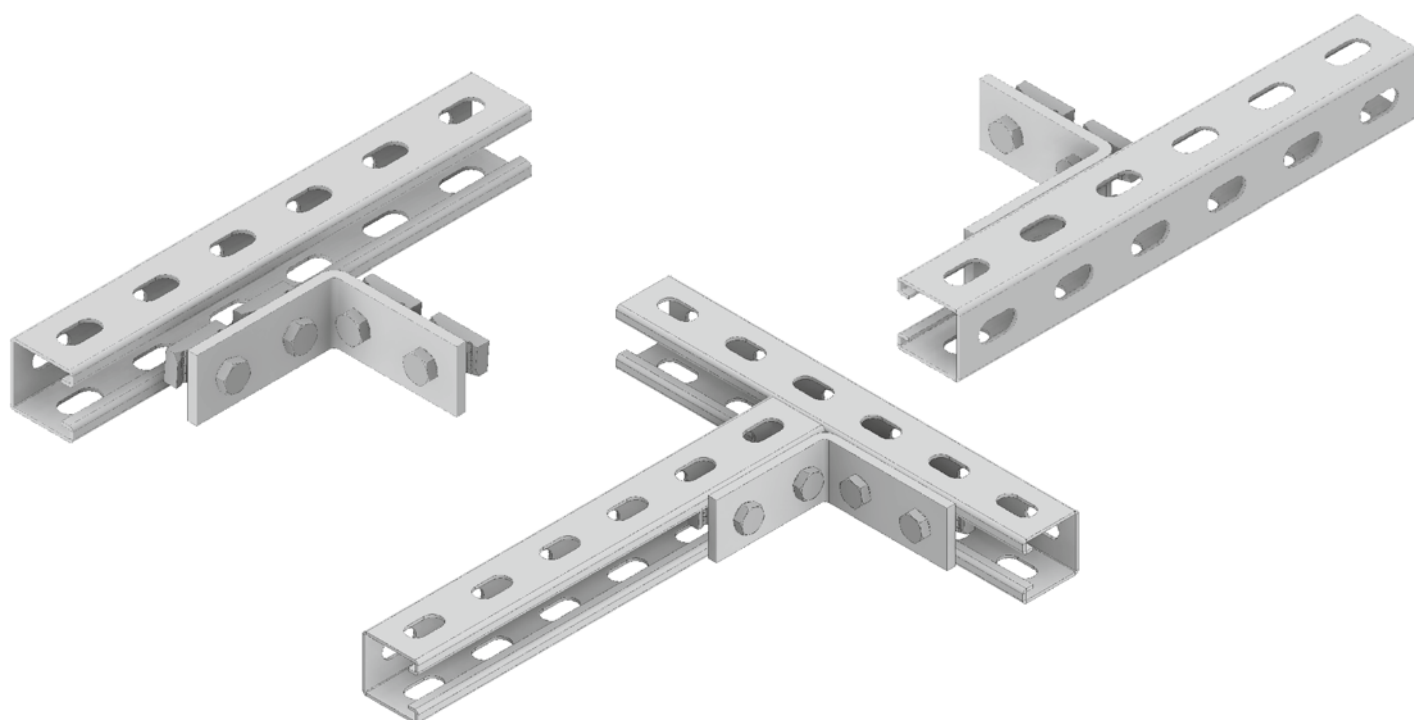

►► **ANGLED BINRAK CONSOLE APPLICATION**

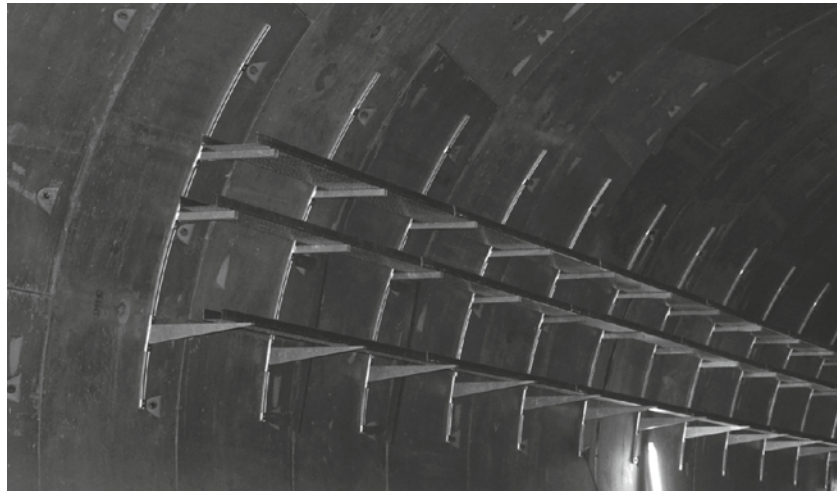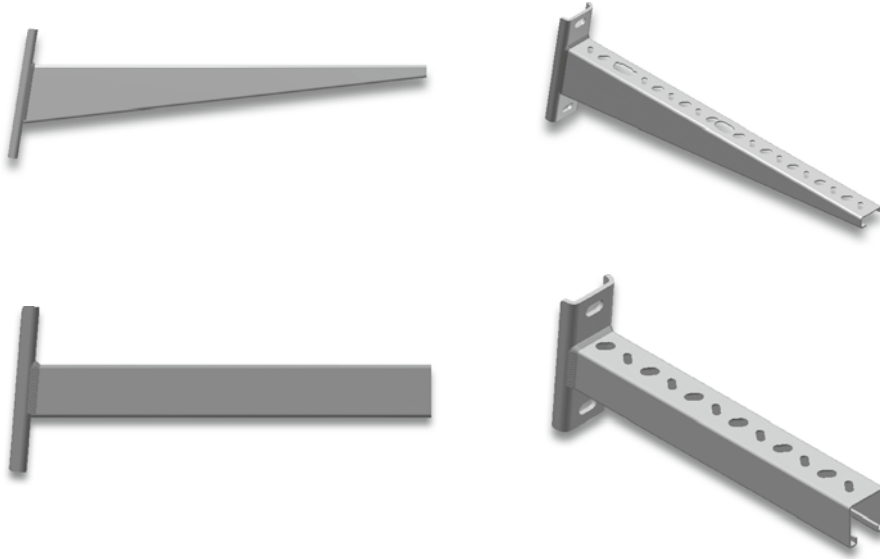


CONTENTS

2-11	Binrak Channel
12	Binrak Double Channel
13-14	Maximum Load For Binrak Profiles
15-20	Binrak Fitting Accessories
21-27	Binrak Modular Fitting Accessories
28	Binrak Cross Connectors
29-31	Binrak Fitting Accessories
32-35	Binrak Support With Holes
36	Heavy Duty Support
37	Adjustable Angle Brackets
38	Sample Mounting Applications


►► **BINRAK CHANNEL (41x41mm)**
Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 451 BINRAK	2	2,214	3005459
BR 452 BINRAK	2	1,936	3005312
BR 453 BINRAK	2	2,122	3006383

BR 451 - 2,0 mm

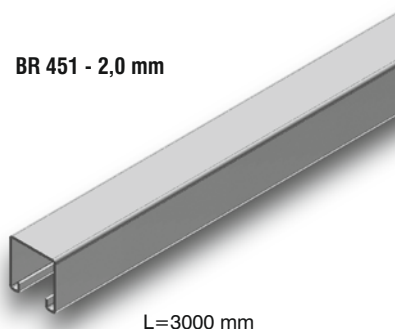


BR 452 - 2,0 mm

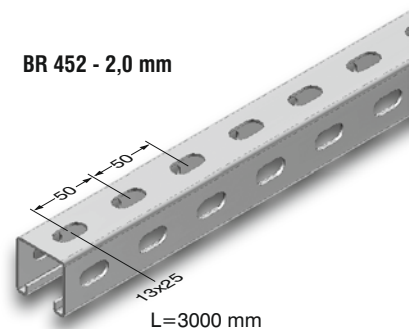

►► **BINRAK CHANNEL (41x41mm)**
Hot Dip Galvanized (TS EN ISO 1461)




Description	T (mm)	Weight (kg./m.)	Order Code
BR 451 BINRAK	2	2,435	3005460
BR 452 BINRAK	2	2,130	3005313
BR 453 BINRAK	2	2,334	3006384

BR 453 - 2,0 mm

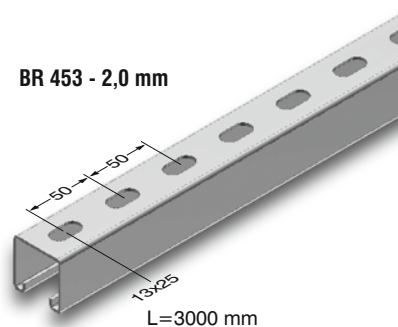

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 451 BR 452 BR 453	2,80	6,27	3,05	1,49	7,75	3,78	1,66

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	3,00	4,80
750	3,75	2,35	3,76
1000	5,00	1,80	2,88
1250	6,25	1,45	2,32
1500	7,50	1,20	1,92
1750	8,75	0,95	1,52
2000	10,00	0,72	1,15
2250	11,25	0,55	0,88
2500	12,50	0,44	0,70
2750	13,75	0,35	0,56
3000	15,00	0,30	0,48

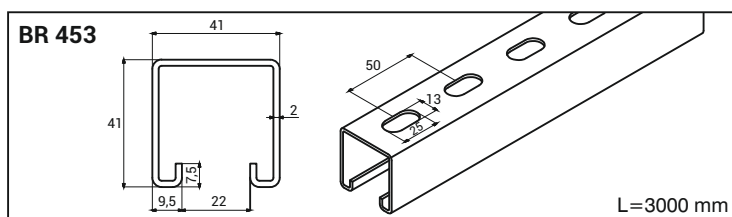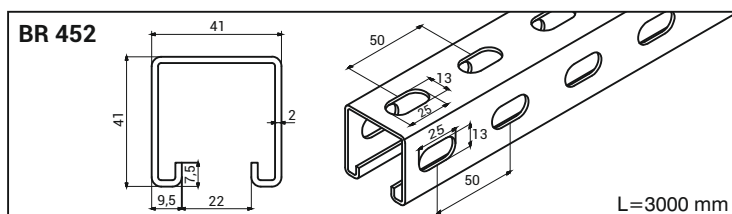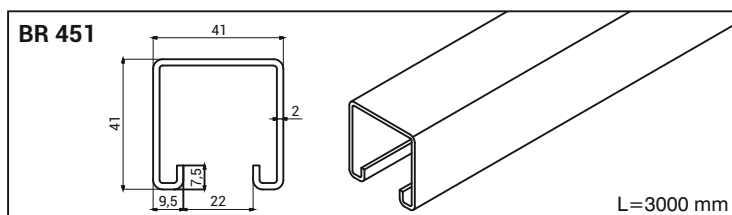

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.


■ Material weights may vary by ± 10%

►► BINRAK CHANNEL (41x41mm)


Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 461 BINRAK	2,5	2,690	3005461
BR 462 BINRAK	2,5	2,341	3005314
BR 463 BINRAK	2,5	2,578	3006385

BR 461 - 2,5 mm

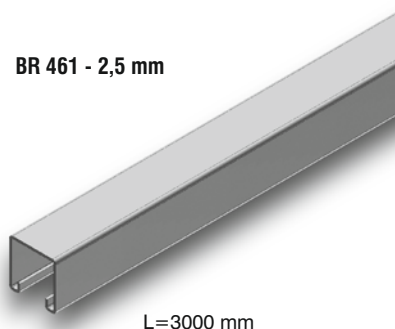

BR 462 - 2,5 mm

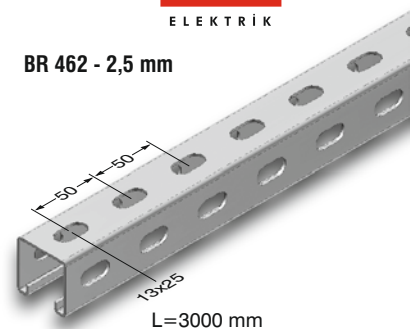


►► BINRAK CHANNEL (41x41mm)

Hot Dip Galvanized (TS EN ISO 1461)




Description	T (mm)	Weight (kg./m.)	Order Code
BR 461 BINRAK	2,5	2,959	3005462
BR 462 BINRAK	2,5	2,575	3005315
BR 463 BINRAK	2,5	2,836	3006386

BR 463 - 2,5 mm

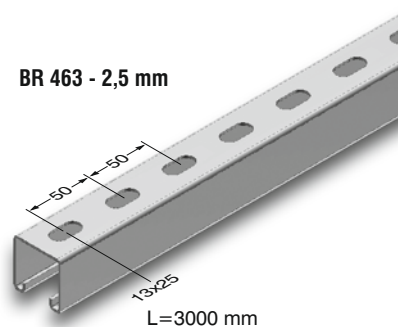

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 461 BR 462 BR 463	3,40	7,36	3,59	1,47	9,26	4,51	1,64

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	3,20	5,12
750	3,75	2,55	4,08
1000	5,00	2,00	3,20
1250	6,25	1,55	2,48
1500	7,50	1,20	1,92
1750	8,75	1,02	1,63
2000	10,00	0,90	1,44
2250	11,25	0,74	1,18
2500	12,50	0,60	0,96
2750	13,75	0,50	0,80
3000	15,00	0,40	0,64

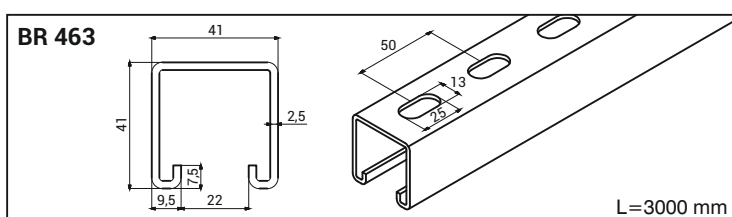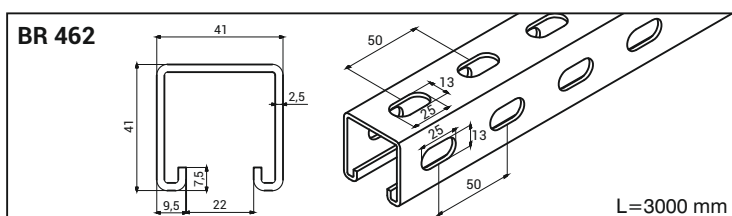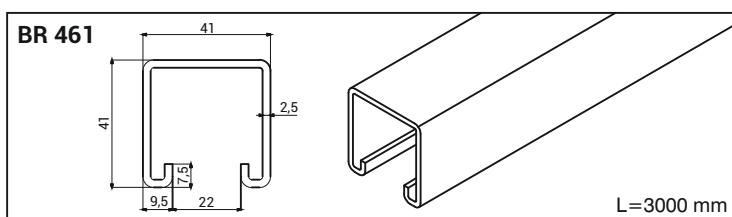

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.

■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x41mm)


Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 401 BINRAK	1,5	1,587	3008328

►► BINRAK CHANNEL (41x41mm)


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 401 BINRAK	1,5	1,745	3008329

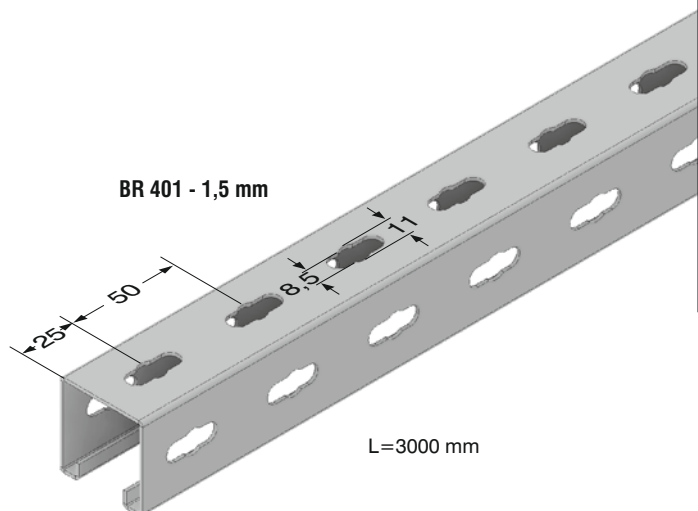

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 401	2,17	5,08	2,47	1,52	6,13	5,83	1,68

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	1,40	2,24
750	3,75	1,30	2,08
1000	5,00	1,20	1,92
1250	6,25	1,06	1,69
1500	7,50	0,90	1,44
1750	8,75	0,68	1,08
2000	10,00	0,50	0,80
2250	11,25	0,38	0,60
2500	12,50	0,30	0,48
2750	13,75	0,24	0,38
3000	15,00	0,20	0,32

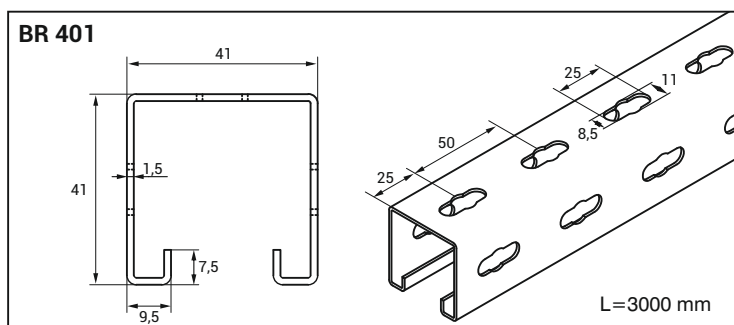

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.


■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x21mm)

Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 251 BINRAK	2,0	1,477	3006387
BR 252 BINRAK	2,0	1,568	3006391

BR 251 - 2,0 mm

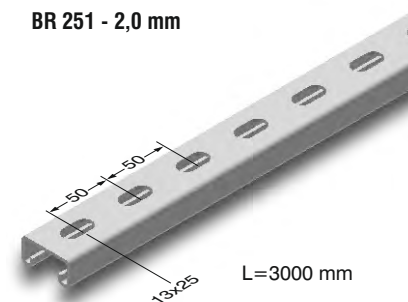


►► BINRAK CHANNEL (41x21mm)

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 251 BINRAK	2,0	1,624	3006388
BR 252 BINRAK	2,0	1,725	3006392



BR 252 - 2,0 mm

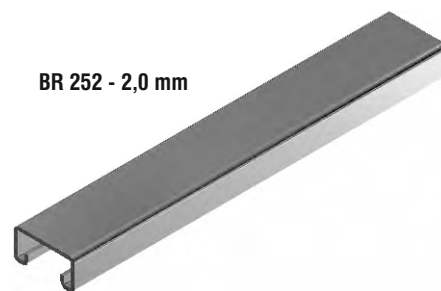

L=3000 mm

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 251 - BR 252	1,99	1,17	1,11	0,76	4,70	4,47	1,53

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	1,10	1,76
750	3,75	0,80	1,28
1000	5,00	0,54	0,86
1250	6,25	0,36	0,57
1500	7,50	0,25	0,40
1750	8,75	0,17	0,27
2000	10,00	0,12	0,23
2250	11,25	0,10	0,16
2500	12,50	0,09	0,14
2750	13,75	0,08	0,12
3000	15,00	0,07	0,11

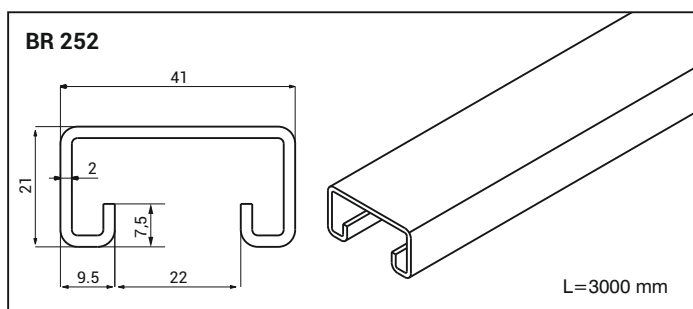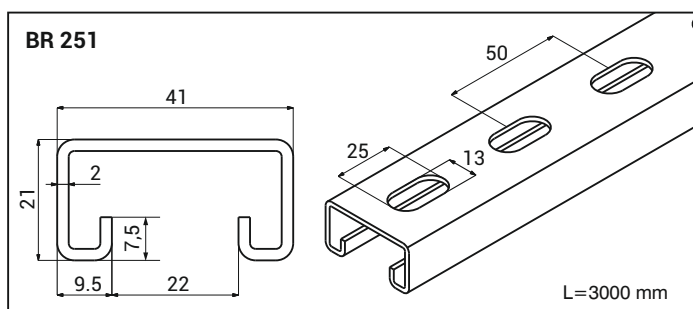

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.


■ Please contact us for your orders with customized sizes.

■ Material weights may vary by $\pm 10\%$

►► **BINRAK CHANNEL (41x21mm)**
Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 261 BINRAK	2,5	1,776	3008372
BR 262 BINRAK	2,5	1,888	3006393

BR 261 - 2,5 mm

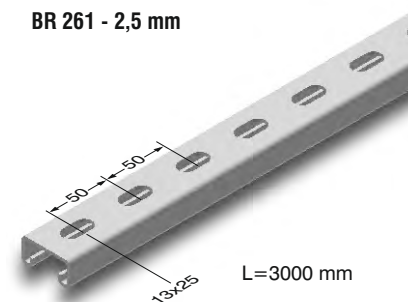

►► **BINRAK CHANNEL (41x21mm)**
Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 261 BINRAK	2,5	1,952	3008373
BR 262 BINRAK	2,5	2,077	3006394



BR 262 - 2,5 mm



L=3000 mm

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 261 - BR 262	2,40	1,32	1,25	0,74	5,54	5,27	1,51

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	1,20	1,92
750	3,75	0,88	1,40
1000	5,00	0,60	0,96
1250	6,25	0,44	0,70
1500	7,50	0,32	0,51
1750	8,75	0,23	0,36
2000	10,00	0,17	0,27
2250	11,25	0,14	0,22
2500	12,50	0,11	0,17
2750	13,75	0,09	0,14
3000	15,00	0,08	0,12

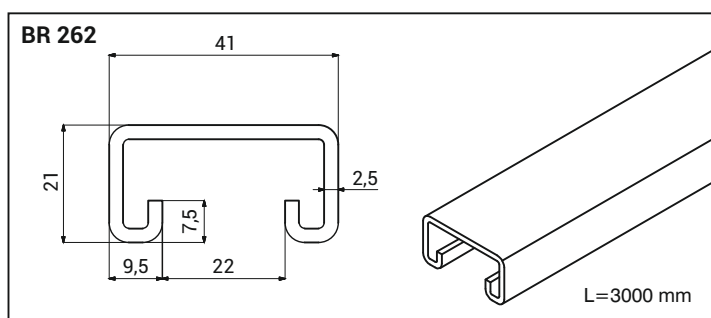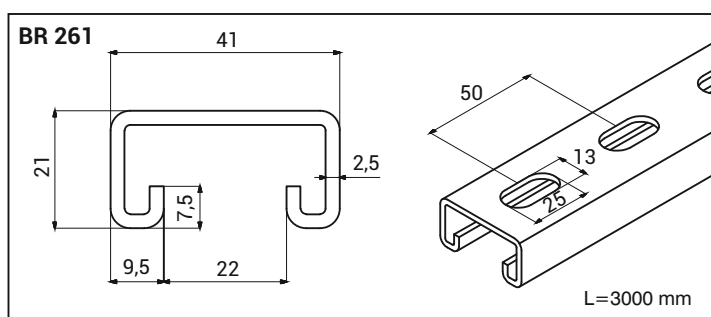

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.

■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x21mm)


Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 201 BINRAK	1,5	1,207	3008330

►► BINRAK CHANNEL (41x21mm)


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 201 BINRAK	1,5	1,327	3008331

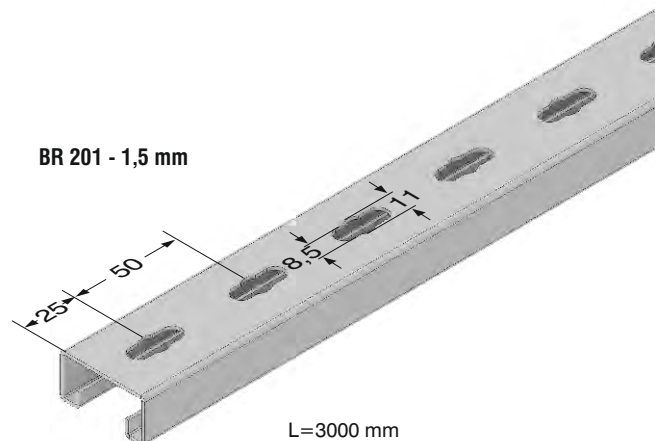

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 201	1,60	1,01	0,96	0,79	3,89	3,70	1,55

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	0,72	1,15
750	3,75	0,52	0,83
1000	5,00	0,35	0,56
1250	6,25	0,27	0,43
1500	7,50	0,19	0,30
1750	8,75	0,13	0,20
2000	10,00	0,09	0,14

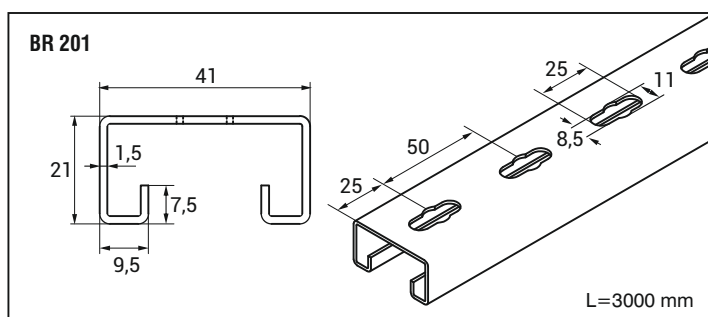

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.


■ Please contact us for your orders with customized sizes.

■ Material weights may vary by $\pm 10\%$

►► **BINRAK CHANNEL (41x61mm)**
Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 651 BINRAK	2	2,779	3184140
BR 653 BINRAK	2	2,668	3184138


BR 651 - 2 mm

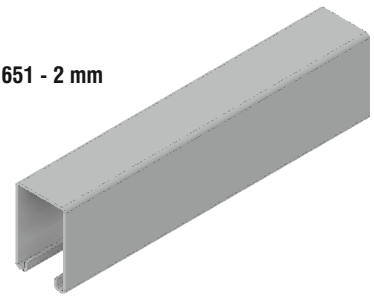

►► **BINRAK CHANNEL (41x61mm)**
Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./m.)	Order Code
BR 651 BINRAK	2	3,057	3184117
BR 653 BINRAK	2	2,957	3184124

BR 653 - 2 mm

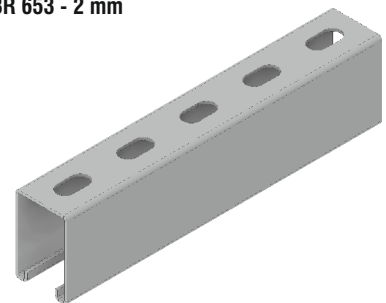

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 651 - BR 653	3,54	16,71	5,07	1,73	10,71	5,22	2,16

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	5,50	7,00
750	3,75	4,00	6,00
1000	5,00	3,00	5,50
1250	6,25	2,40	4,80
1500	7,50	2,00	4,00
1750	8,75	1,70	3,50
2000	10,00	1,50	3,00
2250	11,25	1,30	2,40
2500	12,50	1,10	2,00
2750	13,75	1,00	1,65
3000	15,00	0,80	1,50

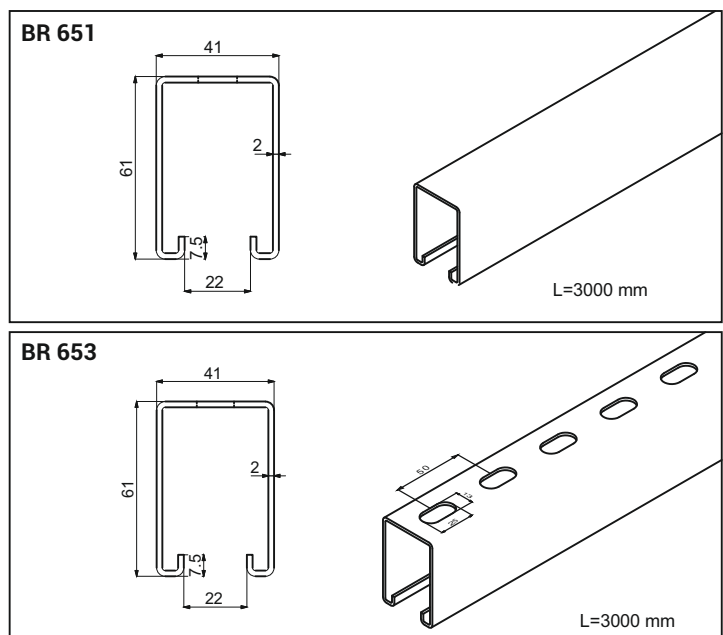

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.


■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x61mm)

Pre-galvanized (TS EN 10346 - TS EN 10143)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 661 BINRAK	2,5	3,474	3174141
BR 663 BINRAK	2,5	3,36	3184139

BR 661 - 2,5 mm

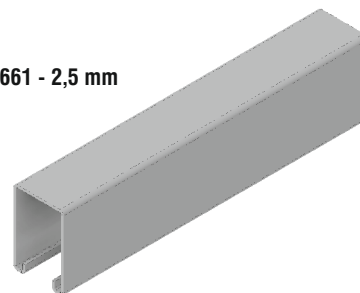


►► BINRAK CHANNEL (41x61mm)

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./m.)	Order Code
BR 661 BINRAK	2,5	3,821	3184118
BR 663 BINRAK	2,5	3,696	3184125

BR 663 - 2,5 mm

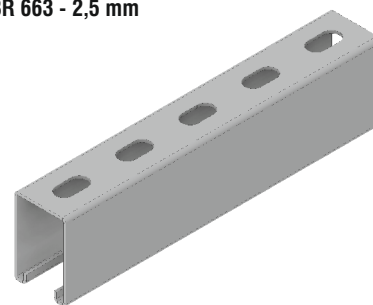

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 661 - BR 663	4,43	20,21	6,12	1,71	12,96	6,32	2,14

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	5,75	8,00
750	3,75	4,50	7,00
1000	5,00	3,60	6,50
1250	6,25	2,90	5,50
1500	7,50	2,40	4,80
1750	8,75	2,00	4,20
2000	10,00	1,80	3,50
2250	11,25	1,60	3,00
2500	12,50	1,50	2,50
2750	13,75	1,30	2,15
3000	15,00	1,10	1,80

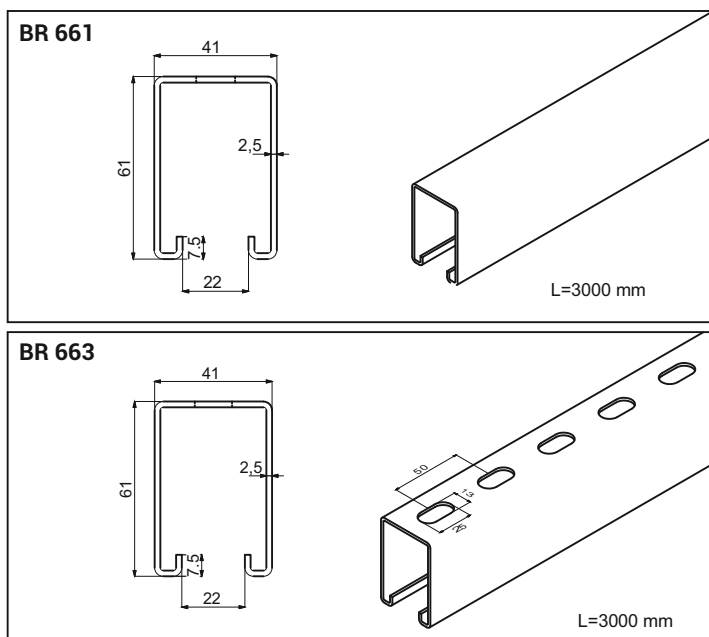

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.


■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x122mm)


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 651 A BINRAK	2	6,114	3184119
BR 653 A BINRAK	2	5,914	3184121

BR 651 A - 2 mm

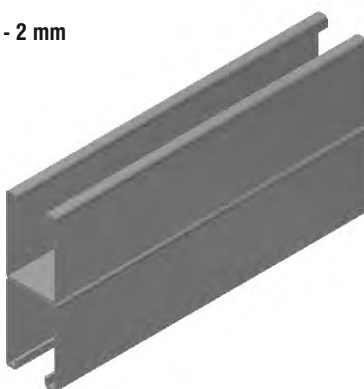

BR 653 A - 2 mm

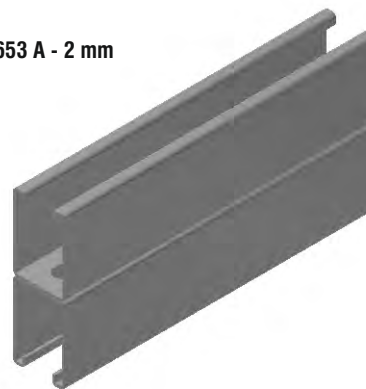



Profile Cross-sectional Properties

Product	Cross-sectional area (cm ²)	X-X			Y-Y		
		Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 651 - BR 653	7,08	89,78	14,71	1,73	21,42	10,44	3,54

SAFE WORKING LOAD



L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	12,00	15,00
750	3,75	9,00	13,50
1000	5,00	7,50	11,50
1250	6,25	6,50	10,00
1500	7,50	5,75	9,00
1750	8,75	5,00	8,00
2000	10,00	4,40	7,00
2250	11,25	3,90	6,20
2500	12,50	3,50	5,60
2750	13,75	3,00	4,80
3000	15,00	2,50	4,00

BR 651 A



L=3000 mm

BR 653 A



L=3000 mm

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.

■ Please contact us for your orders with customized sizes.


■ Material weights may vary by $\pm 10\%$

►► BINRAK CHANNEL (41x122mm)


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./m.)	Order Code
BR 661 A BINRAK	2,5	7,643	3184120
BR 663 A BINRAK	2,5	7,392	3184122

BR 661 A - 2,5 mm

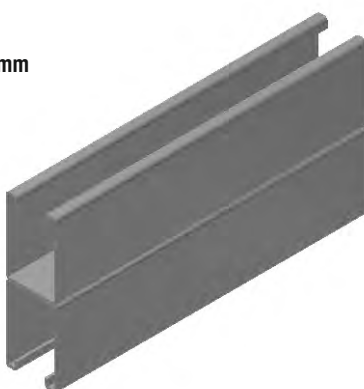


BR 663 A - 2,5 mm

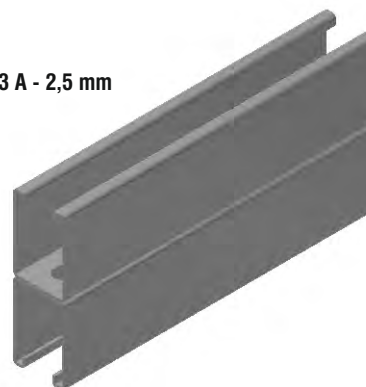

Profile Cross-sectional Properties		X-X			Y-Y		
Product	Cross-sectional area (cm ²)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)	Moment of Inertia I (cm ⁴)	Section Modulus S (cm ³)	Radius Of Gyration R (cm)
BR 661 A - BR 663 A	8,86	109,33	17,92	1,71	25,93	12,64	1,71

SAFE WORKING LOAD			
L (mm)	Deflexion (mm)	Point F (kN)	Distributed F (kN)
500	2,50	14,00	17,00
750	3,75	10,50	16,00
1000	5,00	9,00	13,50
1250	6,25	8,00	12,00
1500	7,50	7,00	10,50
1750	8,75	6,00	9,50
2000	10,00	5,25	8,40
2250	11,25	4,75	7,40
2500	12,50	4,30	6,50
2750	13,75	3,90	5,50
3000	15,00	3,00	4,80

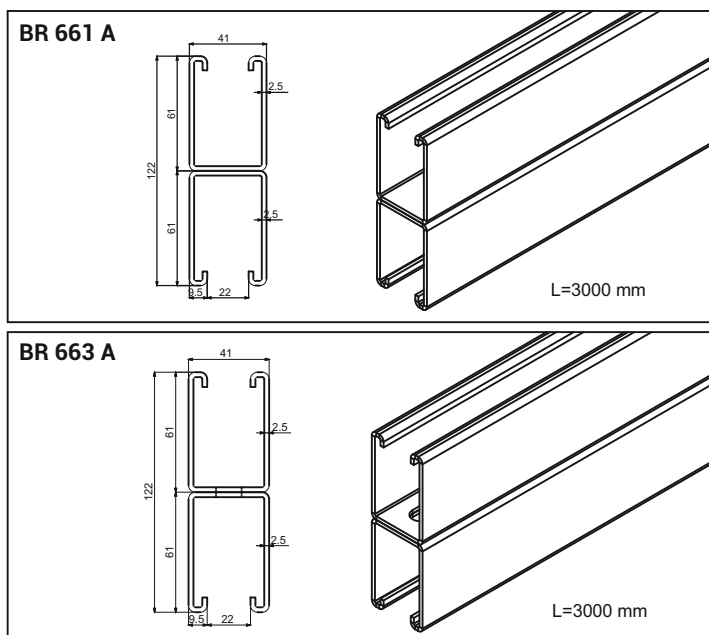

■ Maximum deflexion L/200 value is not exceeded in the indicated L (mm) size.

■ Please indicate the order code in your orders.


■ Please contact us for your orders with customized sizes.

■ Material weights may vary by $\pm 10\%$

►► **BINRAK DOUBLE CHANNEL (41x82mm)**


Hot Dip Galvanized (TS EN ISO 1461)

Description	Weight (kg./m.)	Order Code
BR 451 A (41x82x2mm)	4,901	3000219
BR 461 A (41x82x2,5mm)	6,010	3000220
BR 453 A (41x82x2mm)	4,668	3000221
BR 463 A (41x82x2,5mm)	5,672	3000222
BR 452 A (41x82x2mm)	4,259	3000223
BR 462 A (41x82x2,5mm)	5,150	3000224

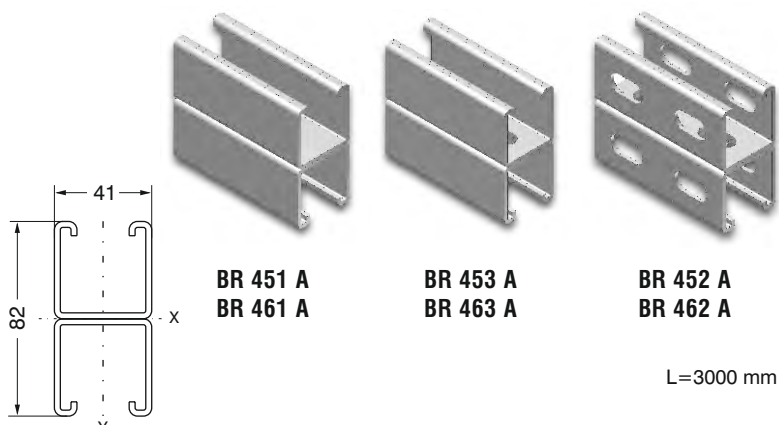►► **BINRAK DOUBLE CHANNEL (41x82mm)**


Hot Dip Galvanized (TS EN ISO 1461)

Description	Weight (kg./m.)	Order Code
BR 451 B (41x82x2mm)	4,901	3000225
BR 461 B (41x82x2,5mm)	6,010	3000226
BR 453 B (41x82x2mm)	4,668	3000227
BR 463 B (41x82x2,5mm)	5,672	3000228
BR 452 B (41x82x2mm)	4,259	3000229
BR 462 B (41x82x2,5mm)	5,150	3000230

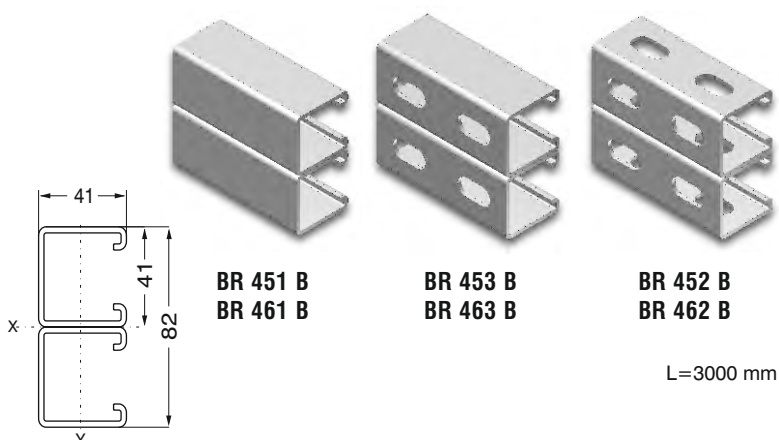►► **BINRAK DOUBLE CHANNEL (41x82mm)**


Hot Dip Galvanized (TS EN ISO 1461)

Description	Weight (kg./m.)	Order Code
BR 451 C (41x82x2mm)	4,901	3000231
BR 461 C (41x82x2,5mm)	6,010	3000232
BR 453 C (41x82x2mm)	4,668	3000233
BR 463 C (41x82x2,5mm)	5,672	3000234
BR 452 C (41x82x2mm)	4,259	3000235
BR 462 C (41x82x2,5mm)	5,150	3000236

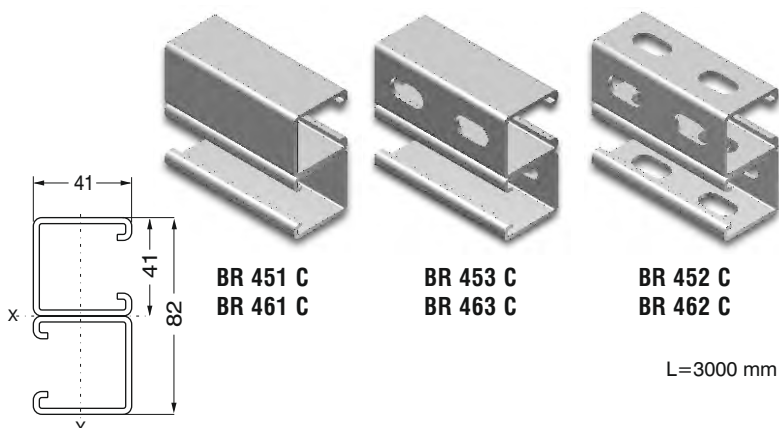►► **BINRAK DOUBLE CHANNEL (41x82mm)**

Hot Dip Galvanized (TS EN ISO 1461)

Description	Weight (kg./m.)	Order Code
BR 451 D (41x82x2mm)	4,901	3000237
BR 461 D (41x82x2,5mm)	6,010	3000238
BR 453 D (41x82x2mm)	4,668	3000239
BR 463 D (41x82x2,5mm)	5,672	3000240
BR 452 D (41x82x2mm)	4,259	3000241
BR 462 D (41x82x2,5mm)	5,150	3000242







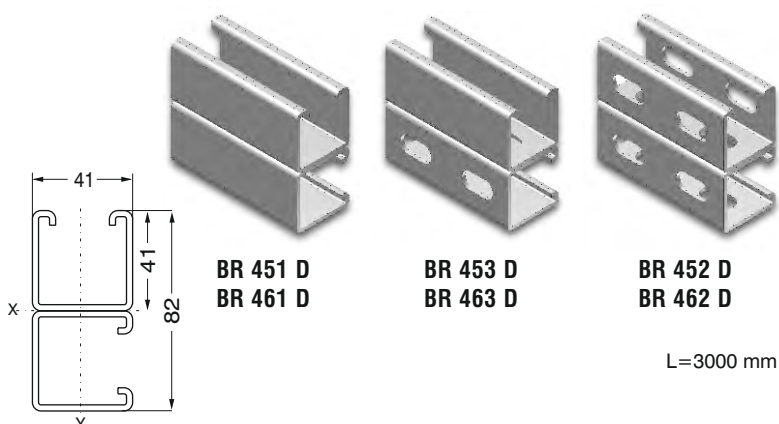


■ Please indicate order code in your orders.


■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$


▶▶ MAXIMUM LOAD FOR BINRAK PROFILES



41X21					41X41			41X61								
																
Profile Thickness (t)									2,5mm	2mm	2,5mm					
BR 201			BR 251		BR 261		BR 401		BR 451 BR 452 BR 453		BR 461 BR 462 BR 463		BR 651 BR 653		BR 661 BR 663	
Profile Length L (mm)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)	q (kg)
500	115	176	192	224	480	512	700	800	700	600	550	650	550	480	420	350
750	83	128	140	208	376	408	600	700	600	550	650	550	480	400	350	300
1000	56	86	96	192	288	320	550	650	550	480	400	350	300	250	215	180
1250	43	57	70	169	232	248	400	480	400	350	300	250	215	180	150	130
1500	30	40	51	144	192	192	350	420	350	300	250	215	180	150	130	110
1750	20	27	36	108	152	163	300	350	300	250	215	180	150	130	110	80
2000	14	24	27	80	115	144	240	300	240	200	165	150	130	110	80	80
2250	-	16	22	60	88	118	200	250	200	165	150	130	110	80	80	80
2500	-	14	17	48	70	96	165	215	165	150	130	110	80	80	80	80
2750	-	12	14	38	56	80	150	180	150	130	110	80	80	80	80	80
3000	-	11	12	32	48	64	150	180	150	130	110	80	80	80	80	80
Profile Length L (mm)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)	F (kg)
500	72	110	120	140	300	320	550	575	550	400	360	290	240	200	180	160
750	52	80	88	130	235	255	400	450	400	300	260	210	170	150	130	110
1000	35	54	60	120	180	200	300	360	300	240	200	160	130	110	80	80
1250	27	36	44	106	145	155	240	290	240	190	150	120	100	80	60	50
1500	19	25	32	90	120	120	200	240	200	160	130	110	80	60	50	40
1750	13	17	23	68	95	102	170	200	170	130	110	80	60	50	40	40
2000	9	12	17	50	72	90	150	180	150	130	110	80	60	50	40	40
2250	-	10	14	38	55	75	130	160	130	110	80	60	50	40	40	40
2500	-	9	11	30	44	60	110	150	110	80	60	50	40	40	40	40
2750	-	8	9	24	35	50	100	130	100	80	60	50	40	40	40	40
3000	-	7	8	20	30	40	80	110	80	60	50	40	40	40	40	40

DISTRIBUTED LOAD



POINT LOAD










■ Please indicate order code in your orders.
 ■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$


►► MAXIMUM LOAD FOR BINRAK PROFILES

Profile Thickness (t)	82X41		122X41	
	2mm	2,5 mm	2 mm	2,5 mm
				
	BR 451 A BR 452 A BR 453 A	BR 461 A BR 462 A BR 463 A	BR 651 A BR 653 A	BR 661 A BR 663 A
Profile Length L (mm)	q (kg)	q (kg)	q (kg)	q (kg)
500	960	1120	1500	1700
750	832	976	1350	1600
1000	704	832	1150	1350
1250	608	712	1000	1200
1500	528	608	900	1050
1750	456	512	800	950
2000	400	448	700	840
2250	352	392	620	740
2500	304	352	560	650
2750	272	320	480	550
3000	240	288	400	480
Vertical Deviation (max. L/200) (mm)	F (kg)	F (kg)	F (kg)	F (kg)
2,50	600	700	1200	1400
3,75	520	610	900	1050
5,00	440	520	750	900
6,25	380	445	650	800
7,50	330	380	575	700
8,75	285	320	500	600
10,00	250	280	440	525
11,25	220	245	390	475
12,50	190	220	350	430
13,75	170	200	300	390
15,00	150	180	250	300

DISTRIBUTED LOAD



DISTRIBUTED LOAD



■ Please indicate order code in your orders.


■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$


►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-1 Square Washer	6	0,080	3000218




BR 1-1



►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-2 Two Hole Fitting	6	0,166	3000183




BR 1-2



►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-3 Four Hole Fitting	6	0,330	3000184

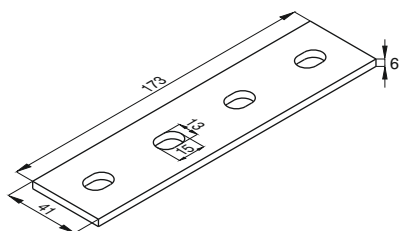


BR 1-3




►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-4 Four Hole Tunnel Fit.	6	1,138	3000185

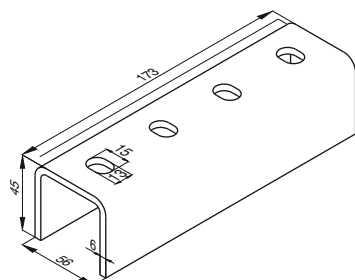

BR 1-4

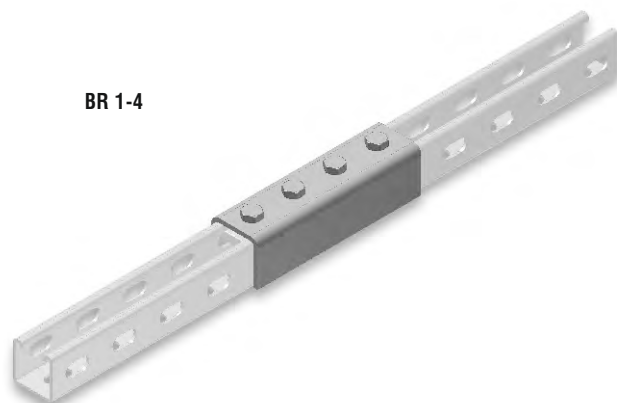


■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$


Hot Dip Galvanized (TS EN ISO 1461)

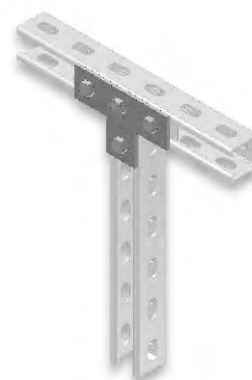

Hot Dip Galvanized (TS EN ISO 1461)

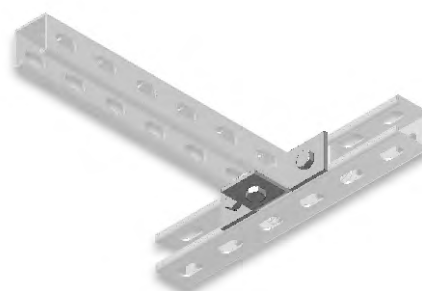

Hot Dip Galvanized (TS EN ISO 1461)

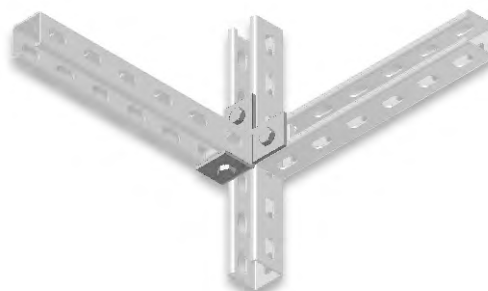[illegible]

Hot Dip Galvanized (TS EN ISO 1461)




- For installation, M10 bolts and nuts should be ordered
- Material weights may vary by $\pm 10\%$


►► **BINRAK FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-13 T 45° Fitting	6	0,320	3000196




BR 1-13

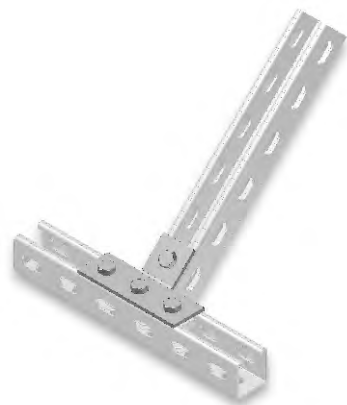►► **BINRAK FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-14 L Bend Two Hole Fit.	6	0,160	3000198





BR 1-14

►► **BINRAK FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-15 L Bend Four Hole Fit.	6	0,323	3000203
BR 1-36 Flag L Bend Four Hole Fit.	6	0,482	3125796



BR 1-15




BR 1-36

►► **BINRAK FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-16 L Bend Three Hole Fit.	6	0,239	3000199



BR 1-16



■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$

►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-17 L Bend Three Hole Fit. 2	6	0,239	3000197



►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-18 L Bend Four Hole Fit. 2	6	0,323	3000204



►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-19 Z Fitting 1	6	0,239	3000200



►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-20 Z Fitting 2	6	0,315	3000201




■ Please indicate order code in your orders.

■ Please contact us for special size.


BR 1-17

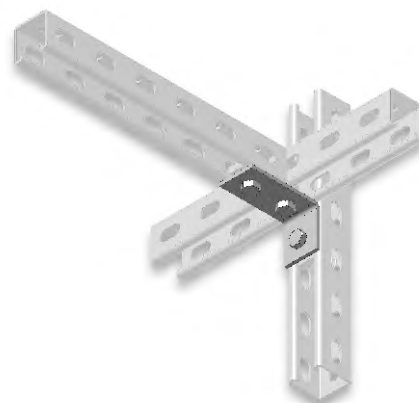


BR 1-18

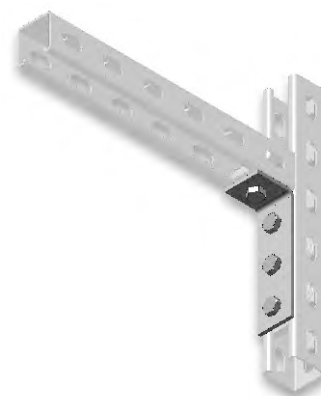

BR 1-19

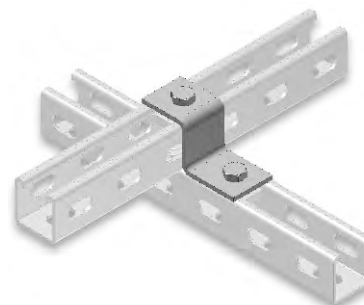

BR 1-20




■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$


BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-21 U Omega Fit. 1	6	0,420	3000202




BR 1-21



BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-22 U Omega Fit. 2	6	0,490	3000189




BR 1-22

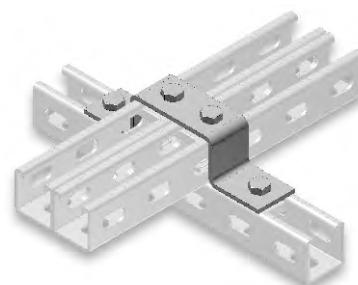

BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-35 U Omega Fit. 3	6	0,576	3106387




BR 1-35


BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-23 135° Bend Fitting	6	0,251	3000191




BR 1-23


BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-24 60° Fitting	6	0,326	3000216



BR 1-24



■ Please indicate order code in your orders.

■ Please contact us for special size.

■ For installation, M10 bolts and nuts should be ordered


■ Material weights may vary by $\pm 10\%$



►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-2 Two-hole, self-nut attachment	6	0,286	3136682

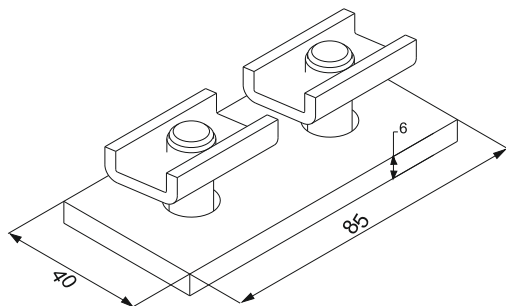


BR 1-2



►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-3 Four-hole, self-nut attachment	6	0,570	3136683

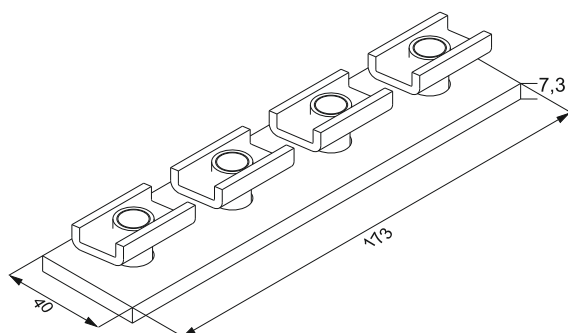


BR 1-3




►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-4 Four-hole tunnel, self-nut attachment	6	1,162	3000185

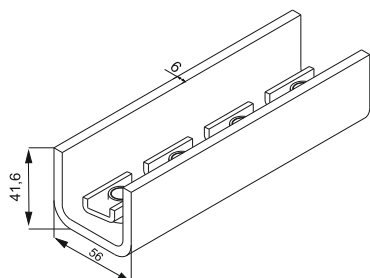

BR 1-4

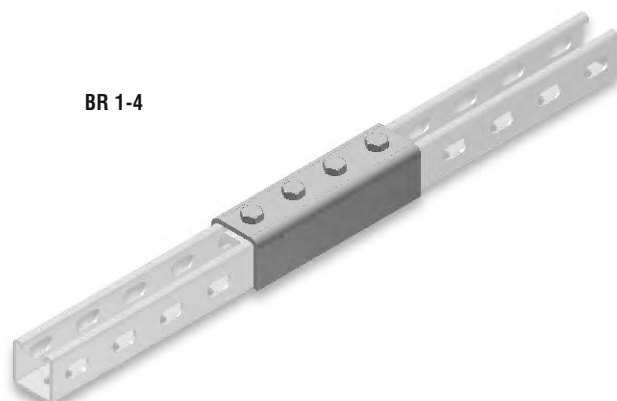

■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$

▶▶ BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-5 L Self-nut fitting	6	0,429	3136677



►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-6 L Self-nut wing connection part	6	0,434	3136678



►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-7 "+" Self-nut connection part	6	0,710	3136679



►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-8 "W" wing self-nut connection part	6	0,567	3136680

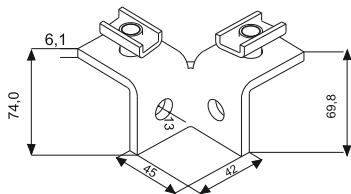

■ Please indicate order code in your orders.


■ Please contact us for special size.

■ For installation, M10 bolts and nuts should be ordered


■ Material weights may vary by $\pm 10\%$

NEW


BR 1-5

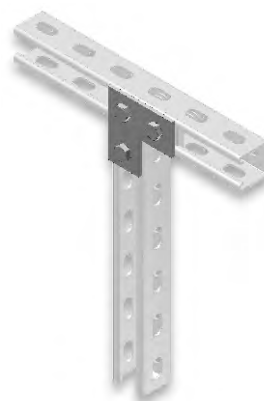


BR 1-6



BR 1-7

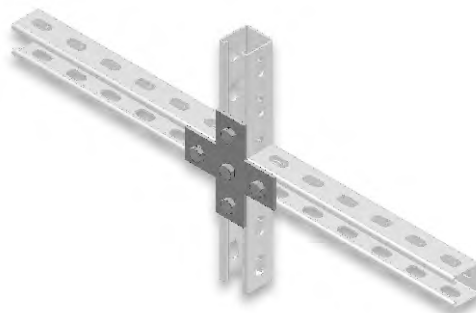

BR 1-8

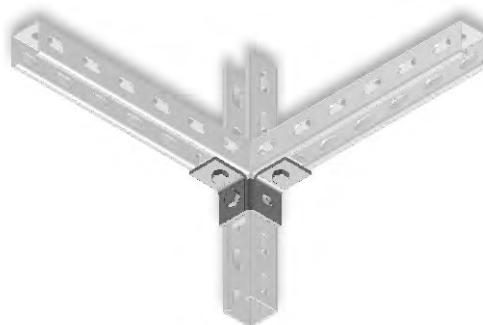





►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-9 T Self-nut fitting	6	0,560	3136673




BR 1-9

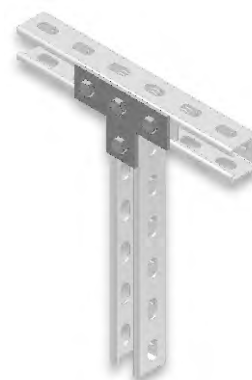


►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-10 T offset connection self-nut	6	0,560	3136674




BR 1-10

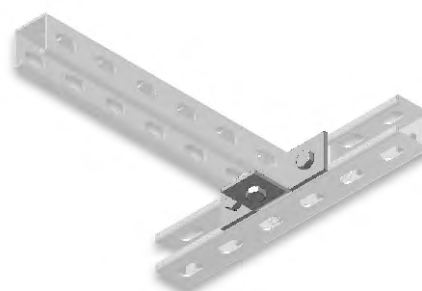


►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-11 left offset self-nut part 90	6	0,560	3136675




BR 1-11

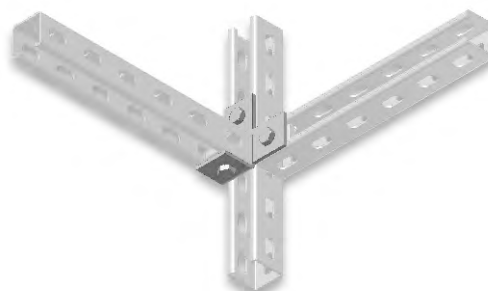

►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-12 right offset self-nut part 90	6	0,560	3136676



BR 1-12



■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$


►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-13 T 45 Self-nut fitting	6	0,560	3136668




BR 1-13

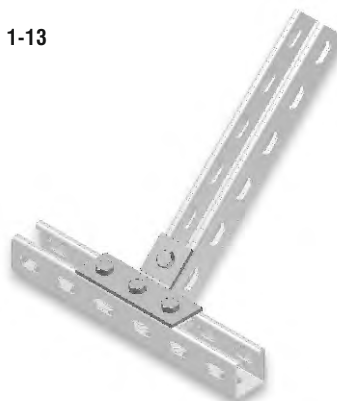►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-14 L bend self-nut connection part	6	0,280	3136669




BR 1-14

►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-15 L bend self-nut connection part	6	0,563	3136670




BR 1-15


►► **BINRAK MODULAR FITTING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-16 L bend self-nut connection part	6	0,419	3136672



BR 1-16

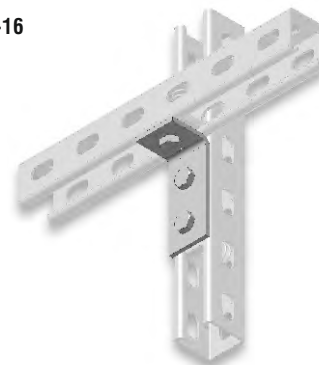

■ Please indicate order code in your orders.

■ Please contact us for special modules.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$

BINRAK MODULAR FITTING ACCESSORIES


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-17 L self-nut bend connection part	6	0,419	3136664


BINRAK MODULAR FITTING ACCESSORIES


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-18 L self-nut bend connection part	6	0,563	3136665


BINRAK MODULAR FITTING ACCESSORIES


Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-19 Z self-nut connection part	6	0,359	3136666


BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)


Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-20 Z self-nut connection part	6	0,435	3136667




BR 1-17



BR 1-18

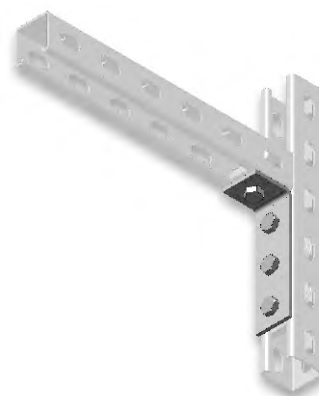

BR 1-19

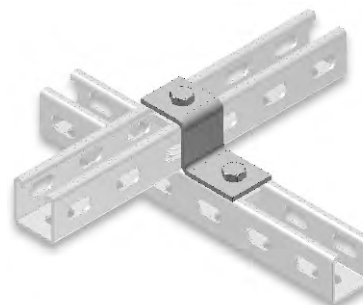

BR 1-20



■ Please indicate order code in your orders.

■ Please contact us for special modules.

■ For installation, M10 bolts and nuts should be ordered


■ Material weights may vary by $\pm 10\%$




►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-21 U bridge self-nut connection part	6	0,600	3136659




BR 1-21




►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-22 U bridge self-nut connection part	6	0,730	3136660




BR 1-22

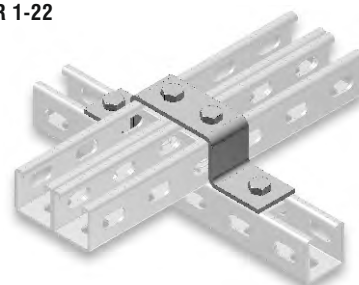


►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-35 U bridge self-nut connection part	6	0,756	3136661




BR 1-35




►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-23 135 self-nut bend part	6	0,371	3136662

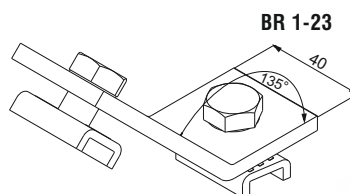


BR 1-23




►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-24 60 angular self-nut connection part	6	0,566	3136663



BR 1-24



■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$

►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-25 U self-nut connection part 82	6	0,451	3136655




BR 1-25



►► BINRAK MODULAR FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-26 leaf self-nut connection part with nut	6	1,072	3136656

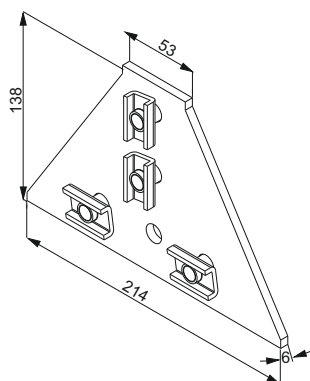

BR 1-26

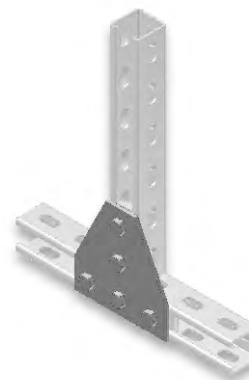

■ Please indicate order code in your orders.


■ Please contact us for special size.

■ For installation, M10 bolts and nuts should be ordered

 ■ Material weights may vary by $\pm 10\%$

►► **BINRAK CROSS CONNECTORS**



Hot Dip Galvanized (TS EN ISO 1461)

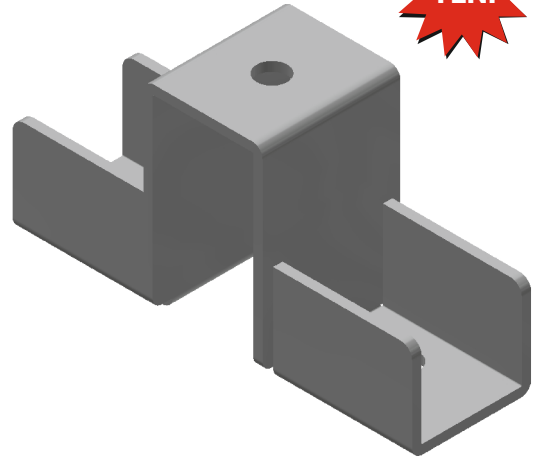

Description	T (mm)	Weight (kg./pc.)	Order Code
21x21 Cross connectors-one way	4	0,35	3136608
42x21 Cross connectors-one way	4	0,43	3136609
41x41 Cross connectors-one way	4	0,52	3136610
82x41 Cross connectors-one way	4	0,68	3136611
21x21 Cross connectors-two way	4	0,52	3136612
42x21 Cross connectors-two way	4	0,61	3136613
41x41 Cross connectors-two way	4	0,77	3136614
82x41 Cross connectors-two way	4	0,93	3136615

21x21 Cross connectors - one way	42x21 Cross connectors - one way	21x21 Cross connectors-two way	42x21 Cross connectors-two way


41x41 Cross connectors - one way	82x41 Cross connectors - one way	42x41 Cross connectors-two way	82x41 Cross connectors-two way

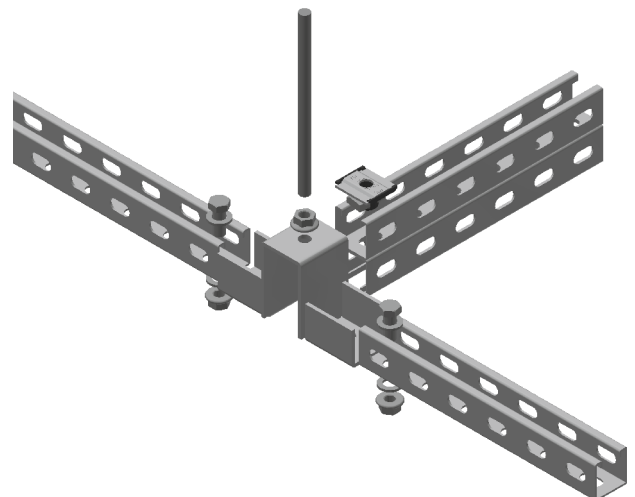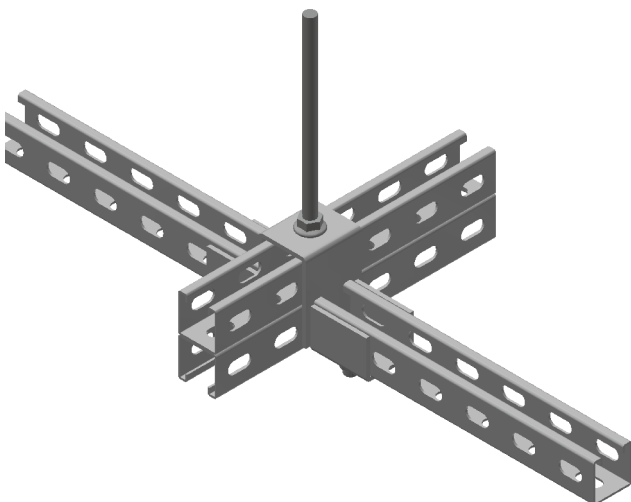

►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-25 U Fitting	6	0,331	3000190




BR 1-25




►► BINRAK FITTING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-26 Gusset Fitting	6	0,814	3000217




BR 1-26

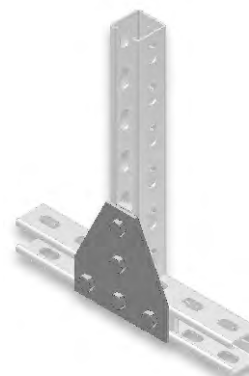


►► BINRAK FIXING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-27 Flag Fixing 82mm	6	2,037	3000206




BR 1-27

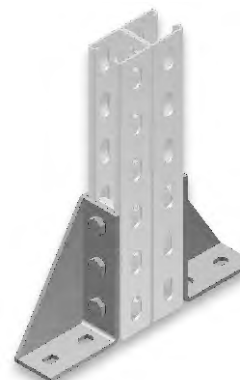


►► BINRAK FIXING ACCESSORIES

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-28 Flag Fixing 41mm	6	1,798	3000205



BR 1-28

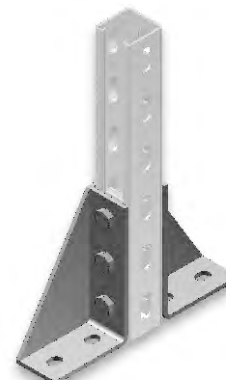

■ Please indicate order code in your orders.

■ Please contact us for special size.


■ For installation, M10 bolts and nuts should be ordered

■ Material weights may vary by $\pm 10\%$


►► **BINRAK FIXING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-29 Base Fixing Single	6	1,205	3000208
BR 1-30 Base Fixing Single	6	1,481	3000209

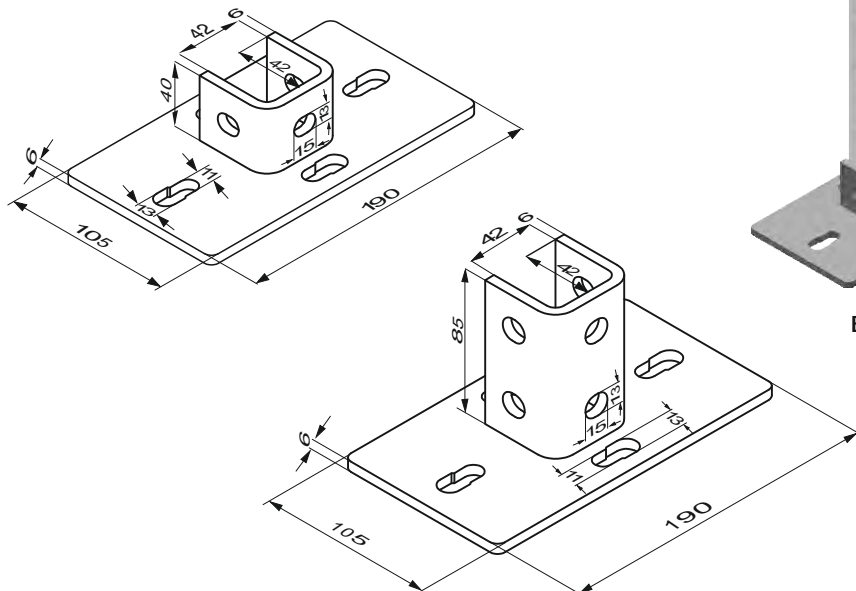


Ceiling/Floor Mounting 1

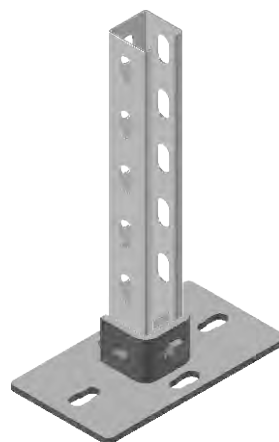

BR 1-29

Ceiling/Floor Mounting 2

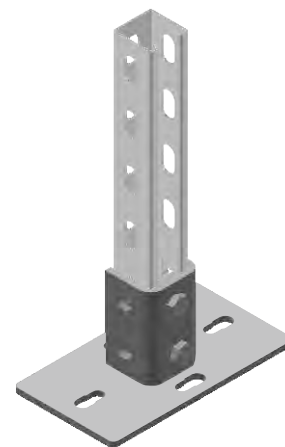


BR 1-30


►► **BINRAK FIXING ACCESSORIES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-31 Base Fixing Double	6	1,281	3000211
BR 1-32 Base Fixing Double	6	1,650	3000212

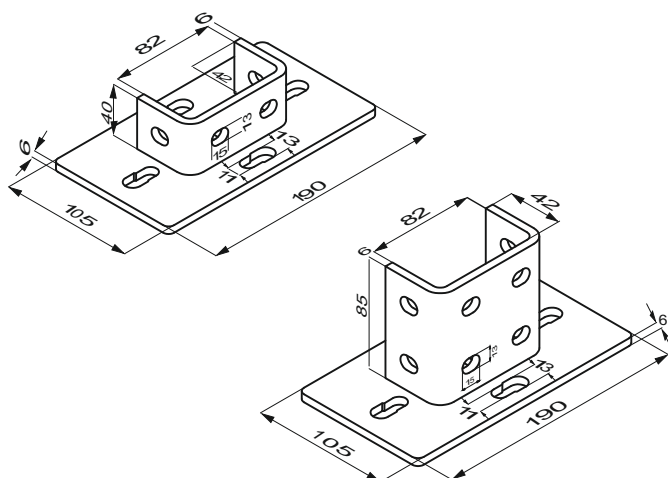


Ceiling/Floor Mounting 1

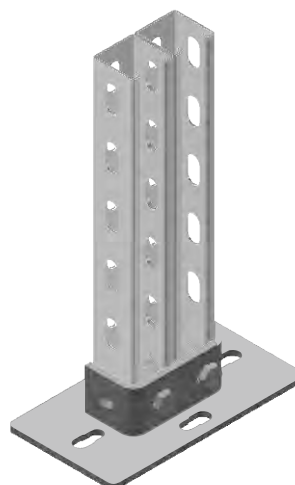

BR 1-31

Ceiling/Floor Mounting 2

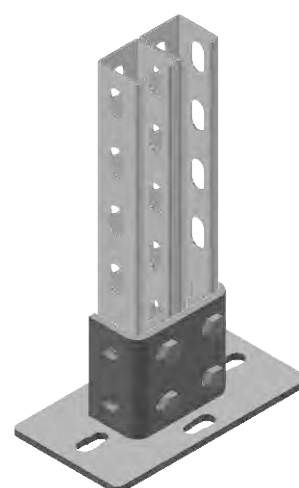

BR 1-32

■ Please indicate order code in your orders.



■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$

BINRAK FIXING ACCESSORIES



Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-33 Beam Clamp (41x41mm)	6	0,473	3000207

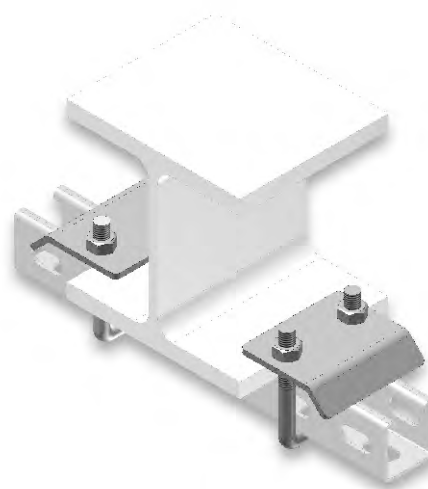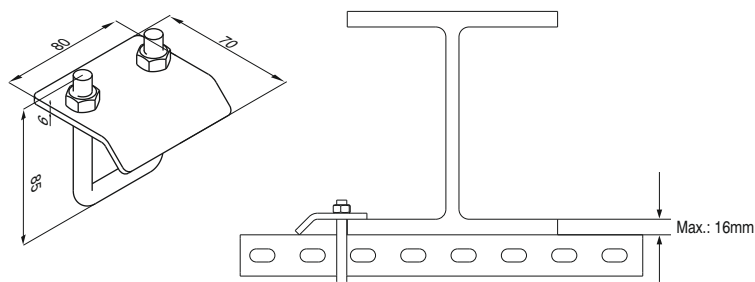
BINRAK FIXING ACCESSORIES



Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	Weight (kg./pc.)	Order Code
BR 1-34 Beam Clamp (41x82mm)	6	0,563	3000213

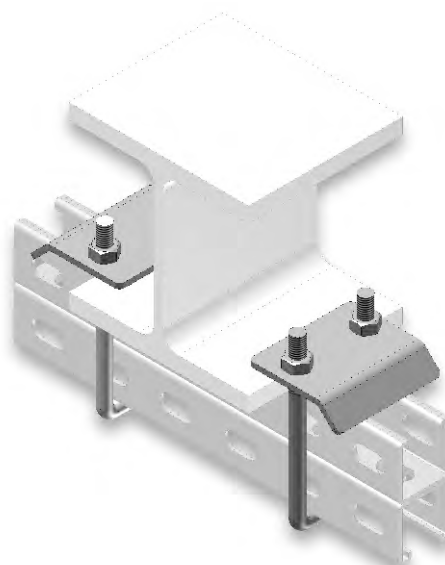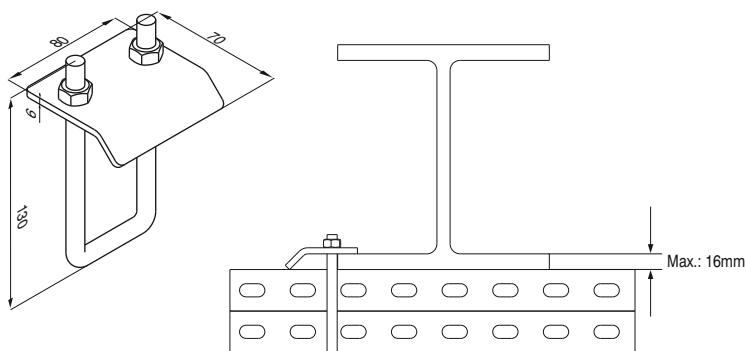
BINRAK FIXING ACCESSORIES

Alkali Zinc

Description	T (mm)	Weight (kg./pc.)	Order Code
TP 2 Fixing Part	6	0,134	3006350

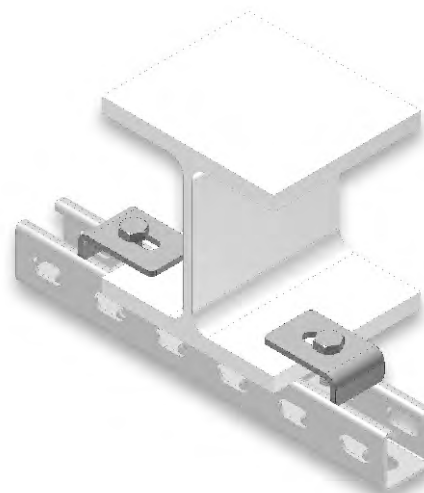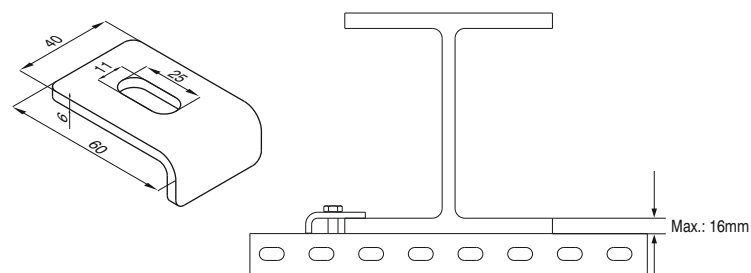

■ The order code includes M10 x 50 bolts and M10 square nuts.

■ Please indicate order code in your orders.


■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$

►► BINRAK SUPPORT WITH HOLES

Hot Dip Galvanized (TS EN ISO 1461)


Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 2-100	150	2	0,588	3000210
BR 2-150	200	2	0,695	3000243
BR 2-200	250	2	0,801	3000244
BR 2-250	300	2	0,908	3000245
BR 2-300	350	2	1,014	3000246
BR 2-400	450	2	1,227	3000247
BR 2-500	550	2	1,440	3000248
BR 2-600	650	2	1,653	3000249



►► BINRAK SUPPORT WITH SINGLE HOLES

Hot Dip Galvanized (TS EN ISO 1461)




Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 3-100	150	2	0,627	3000214
BR 3-150	200	2	0,749	3000250
BR 3-200	250	2	0,865	3000251
BR 3-250	300	2	0,959	3000252
BR 3-300	350	2	1,073	3000253
BR 3-400	450	2	1,299	3000254
BR 3-500	550	2	1,525	3000255
BR 3-600	650	2	1,751	3000256



►► BINRAK SUPPORT WITHOUT HOLES

Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 4-100	150	2	0,634	3000215
BR 4-150	200	2	0,752	3000257
BR 4-200	250	2	0,871	3000258
BR 4-250	300	2	0,988	3000259
BR 4-300	350	2	1,107	3000260
BR 4-400	450	2	1,344	3000261
BR 4-500	550	2	1,579	3000262
BR 4-600	650	2	1,815	3000263

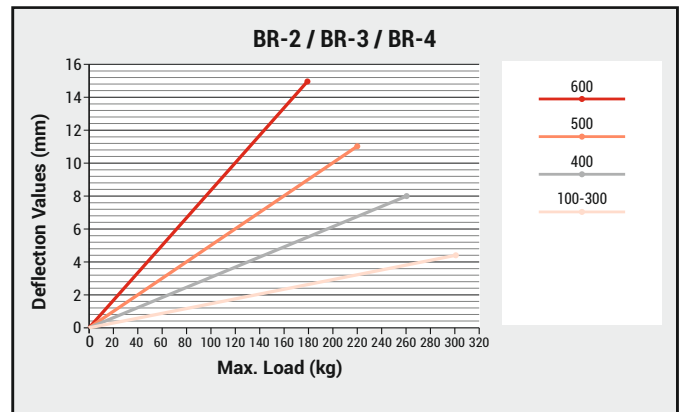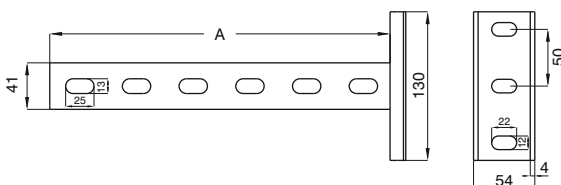


- Please indicate order code in your orders.
- Please contact us for special size.
- The rim of the Binrak support shall be adjusted
- For application of the wall support, welding shall be adjusted
- Material weights may vary by $\pm 10\%$

►► BINRAK DOUBLE SUPPORT WITH HOLES

Hot Dip Galvanized (TS EN ISO 1461)


Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 5-100	150	2	1,011	3000264
BR 5-150	200	2	1,221	3000265
BR 5-200	250	2	1,433	3000266
BR 5-250	300	2	1,646	3000267
BR 5-300	350	2	1,859	3000268
BR 5-400	450	2	2,276	3000269
BR 5-500	550	2	2,710	3000270
BR 5-600	650	2	3,136	3000271



►► BINRAK DOUBLE SUPPORT WITH SINGLE HOLES

Hot Dip Galvanized (TS EN ISO 1461)




Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 6-100	150	2	1,069	3000272
BR 6-150	200	2	1,302	3000273
BR 6-200	250	2	1,535	3000274
BR 6-250	300	2	1,768	3000275
BR 6-300	350	2	2,001	3000276
BR 6-400	450	2	2,467	3000277
BR 6-500	550	2	2,933	3000278
BR 6-600	650	2	3,399	3000279



►► BINRAK DOUBLE SUPPORT WITHOUT HOLES

Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 7-100	150	2	1,089	3000280
BR 7-150	200	2	1,326	3000281
BR 7-200	250	2	1,421	3000282
BR 7-250	300	2	1,800	3000283
BR 7-300	350	2	2,036	3000284
BR 7-400	450	2	2,510	3000285
BR 7-500	550	2	2,985	3000286
BR 7-600	650	2	3,457	3000287

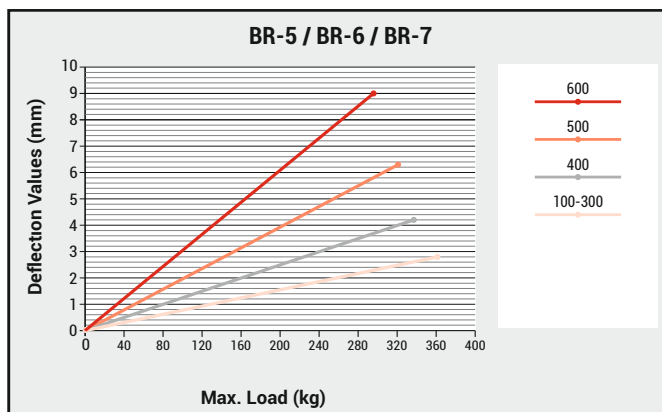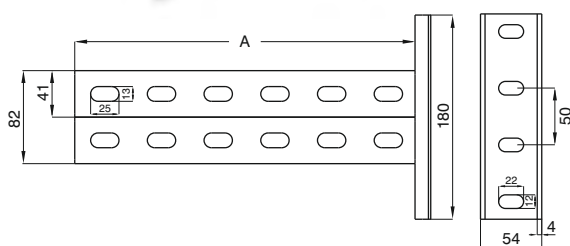


- Please indicate order code in your orders.
- Please contact us for special size.
- For application of the wall support welding shall be adjusted
- Material weights may vary by $\pm 10\%$

►► **BINRAK SUPPORT WITH HOLES**


Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 2-D-100	150	2	0,588	3110929
BR 2-D-150	200	2	0,695	3110930
BR 2-D-200	250	2	0,801	3110931
BR 2-D-250	300	2	0,908	3110932
BR 2-D-300	350	2	1,014	3110933
BR 2-D-400	450	2	1,227	3110934
BR 2-D-500	550	2	1,440	3110935
BR 2-D-600	650	2	1,653	3110936

►► **BINRAK SUPPORT WITH SINGLE HOLES**




Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 3-D-100	150	2	0,627	3110937
BR 3-D-150	200	2	0,749	3110938
BR 3-D-200	250	2	0,865	3110939
BR 3-D-250	300	2	0,959	3110940
BR 3-D-300	350	2	1,073	3110941
BR 3-D-400	450	2	1,299	3110942
BR 3-D-500	550	2	1,525	3110943
BR 3-D-600	650	2	1,751	3110944

►► **BINRAK SUPPORT WITHOUT HOLES**

Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 4-D-100	150	2	0,634	3110945
BR 4-D-150	200	2	0,752	3110946
BR 4-D-200	250	2	0,871	3110947
BR 4-D-250	300	2	0,988	3110948
BR 4-D-300	350	2	1,107	3110949
BR 4-D-400	450	2	1,344	3110950
BR 4-D-500	550	2	1,579	3110951
BR 4-D-600	650	2	1,815	3110952

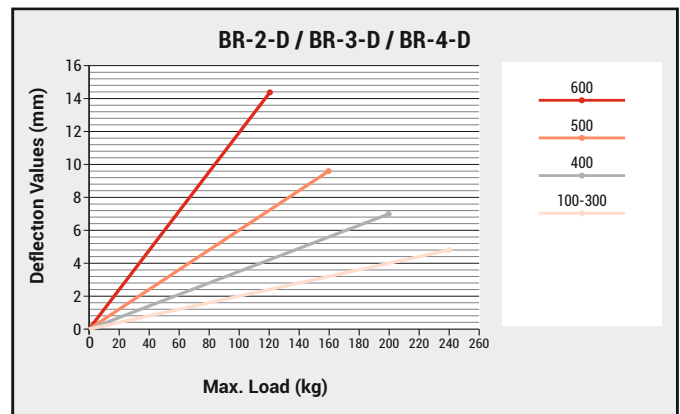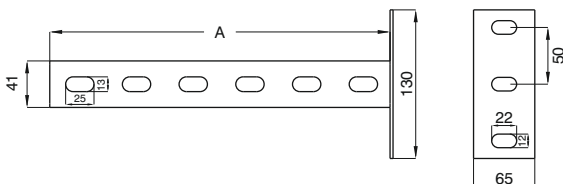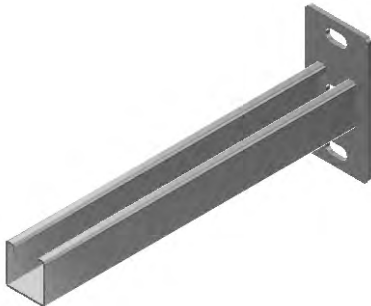


- Please indicate order code in your orders.
- Please contact us for special size.
- The rim of the Binrak support shall be adjusted.
- For application of the wall support, welding shall be adjusted.
- Material weights may vary by $\pm 10\%$

►► BINRAK DOUBLE SUPPORT WITH HOLES

Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 5-D-100	150	2	1,011	3110953
BR 5-D-150	200	2	1,221	3110954
BR 5-D-200	250	2	1,433	3110955
BR 5-D-250	300	2	1,646	3110956
BR 5-D-300	350	2	1,859	3110957
BR 5-D-400	450	2	2,276	3110958
BR 5-D-500	550	2	2,710	3110959
BR 5-D-600	650	2	3,136	3110960



►► BINRAK DOUBLE SUPPORT WITH SINGLE HOLES

Hot Dip Galvanized (TS EN ISO 1461)




Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 6-D-100	150	2	1,069	3110961
BR 6-D-150	200	2	1,302	3110962
BR 6-D-200	250	2	1,535	3110963
BR 6-D-250	300	2	1,768	3110964
BR 6-D-300	350	2	2,001	3110965
BR 6-D-400	450	2	2,467	3110966
BR 6-D-500	550	2	2,933	3110967
BR 6-D-600	650	2	3,399	3110968



►► BINRAK DOUBLE SUPPORT WITHOUT HOLES

Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
BR 7-D-100	150	2	1,089	3110969
BR 7-D-150	200	2	1,326	3110970
BR 7-D-200	250	2	1,421	3110971
BR 7-D-250	300	2	1,800	3110972
BR 7-D-300	350	2	2,036	3110973
BR 7-D-400	450	2	2,510	3110974
BR 7-D-500	550	2	2,985	3110975
BR 7-D-600	650	2	3,457	3110976

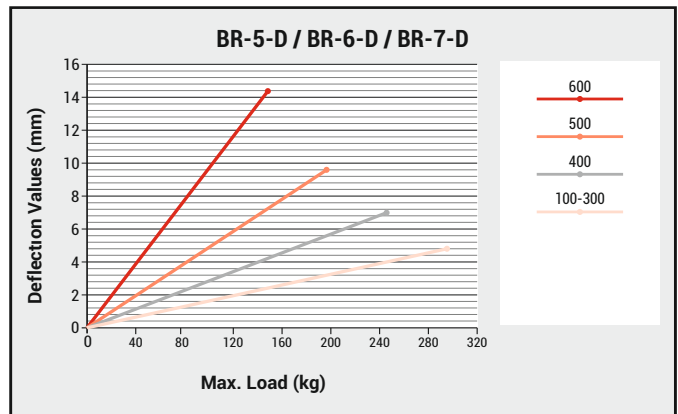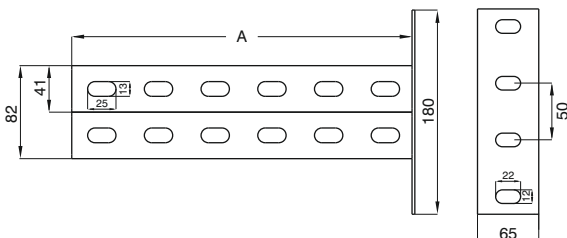



- Please indicate order code in your orders.
- Please contact us for special size.
- For application of the wall support welding shall be adjusted
- Material weights may vary by $\pm 10\%$

►► HEAVY DUTY SUPPORT



Hot Dip Galvanized (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
STS 100	120	2	0,398	3008015
STS 150	170	2	0,474	3008016
STS 200	220	2	0,539	3008017
STS 250	270	2	0,814	3008018
STS 300	320	2	0,920	3008019
STS 400	420	2	1,026	3008020
STS 500	520	2	1,262	3008021
STS 600	620	2	1,425	3008022

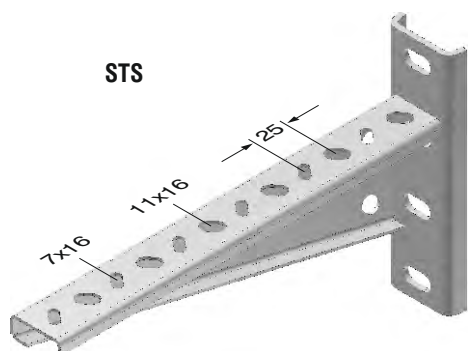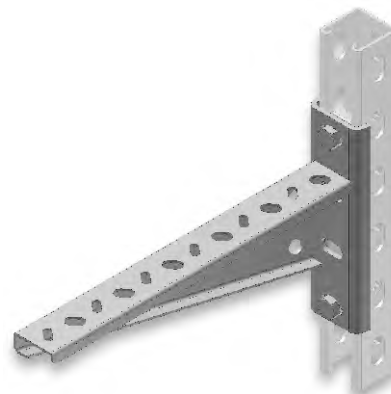


STS

STS 250
STS 300
STS 400
STS 500
STS 600

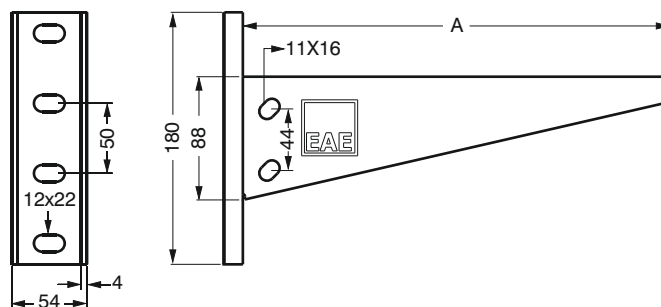

STS

STS 100
STS 150
STS 200

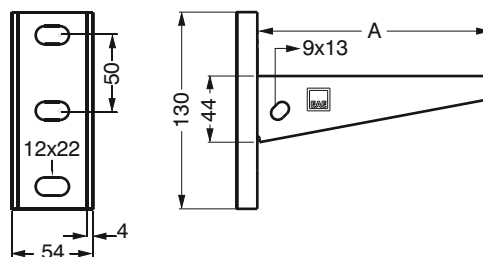

■ Please indicate order code in your orders.

■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$

►► ADJUSTABLE ANGLE BRACKETS

Hot Dip Galvanized (TS EN ISO 1461)



Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code
ST 200	205	2	0,318	2000799
ST 250	255	2	0,416	2000805
ST 300	305	2	0,494	2000800
ST 400	405	2	0,649	2000801
Adjustable Angle Fixing Unit	-	2,5	0,200	3006351

■ For the installation of the angle adjustment tool:

Angle adjusted fitting, 1 pcs.
 M8x20 bolt 2 pcs.
 M8 washer 2 pcs.
 M8 plain washer 2 pcs.
 M8 nut 2 pcs. shall be ordered.

■ For the installation of the angle adjustment tool to the Binrak Console:



M10x30 bolt 2 pcs.
 M10 washer 2 pcs.
 M10 spring nut 2 pcs. shall be ordered.

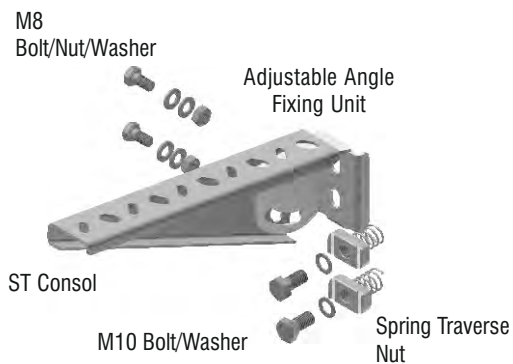

►► MEDIUM VOLTAGE CABLE HANGER

Hot Dip Galvanized (TS EN ISO 1461)

Description	T (mm)	A (mm)	Weight (kg./pc.)	Order Code
M.V. CABLE HANGER	2	150	0,703	3004337
M.V. CABLE HANGER	2	200	0,851	3004338

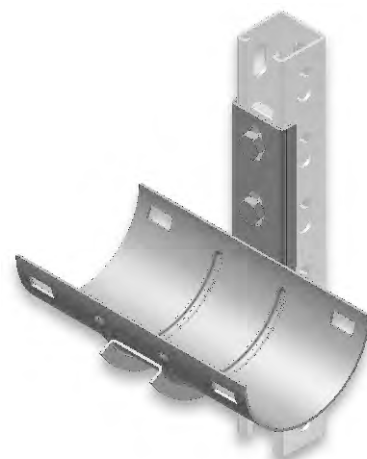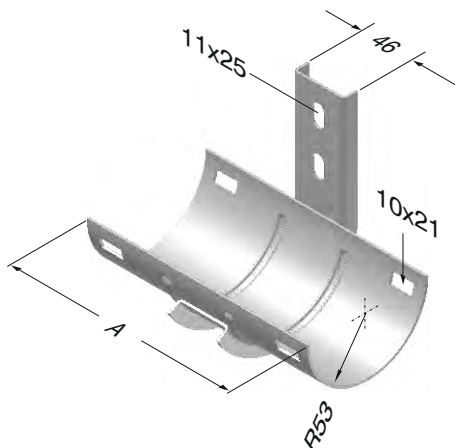

■ Please indicate order code in your orders.

■ Please contact us for special size.

■ Material weights may vary by $\pm 10\%$

►► **SAMPLE MOUNTING APPLICATIONS**

