



Equipped Desk Socket Blocks-Safe, Reliable, Efficient Solutions

EAE GROUP IN NUMBERS





Since 1973

EAE Group of Companies started its journey in the electrical sector in 1973 with the establishment of EAE Elektrik. Since its founding, EAE has grown rapidly, expanding its production and areas of operation by incorporating EAE Lighting in 1983, EAE Machinery in 1996, EAE Electrotechnics in 2004, and EAE Technology in 2009.

EAE carries out its production activities in accordance with ISO 9001 Quality Management, ISO 14001 Environmental Management, ISO 14064-1 Greenhouse Gas Management System, ISO 45001 Occupational Health and Safety Management, ISO 10002 Customer Satisfaction Management, ISO 50001 Energy Management System, and ISO 27001 Information Security Management System standards.







Active Factories



360.000m² Enclosed Space



R&D Centers



150+Countries Exported To




CONTENTS

| E-Line Smart SM-STD-I Standard Free Type | 5 |
|--|----|
| SM-STD I Technical Specifications | 6 |
| E-Line Smart LUX-I Luxury Free Type | 11 |
| E-Line Smart LUX-II Luxury Standing Type | 13 |
| SM-LUX-I Luxury Free Type / SM-LUX-II Footed Type Technical Specifications | 14 |
| E-Line Smart SM-IN-I Recessed Rectangular Type | 17 |
| E-Line Smart SM-IN-I Recessed Rectangular Type Technical Specifications | 18 |
| E-Line Smart Wired STD-I | 20 |
| E-Line Smart Wired STD-I Technical Specifications | 21 |
| Standard Empty Products Table | 22 |
| E-Line Smart SM-FLEX Backbone Channel (Cable Collection System) | 23 |
| General Product Structure and Features | 24 |
| Declaration | 25 |
| Certificate | 26 |

High-Performance and Aesthetic Solutions



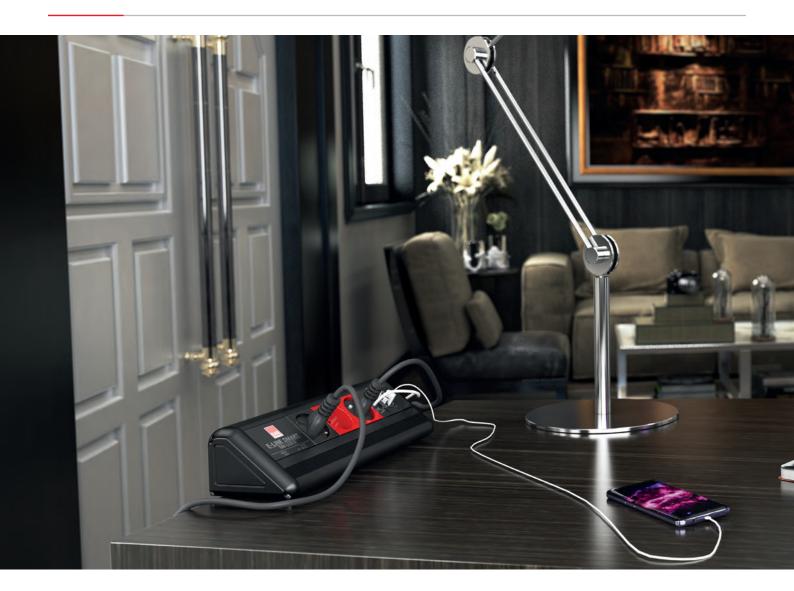









Elegant and Practical Solutions for Business Centres, Offices and Workspaces

- Fully equipped, ready-to-use products with power (grid/UPS), data, telephone, and multimedia sockets for desk work, meetings and presentations.
- Ergonomic and flexible design that can be equipped with modular type power, low current and multimedia sockets according to your personal needs and preferences.

Anodized Aluminium Body

- Anodized, smoke and black color options.
- Rich visual and functional options according to your personal needs and preferences.




E-LINE SMART SM-STD I

Standard Free Type



- It can be securely fixed with screws when needed in rectangular prism structure for desk usage or wall-mounted surface applications. It is a socket block that can be equipped with power, UPS, RJ45, RJ11 sockets; HDMI and USB charging output accessories.
- For energy sockets of various brands, as well as active and passive network components, please contact our company directly.
- Products are supplied in protective nylon bags and packaged in cardboard boxes.
- Prices include installation, internal wiring (applicable to energy sockets), and blast type plastic side covers. All cables are halogen-free. For custom cross-sections or special types, please consult our company.
- According to customer demand, it can be equipped with a minimum of 4 modules and a maximum of 18 modules.

CABLE ENTRY COVERS:

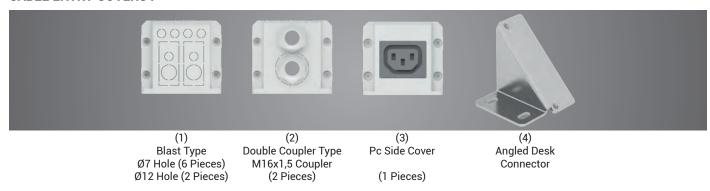

- The cover type (1) is used as standard in the SM-STD I product.
- For cover types (2), (3), and (4) models, please contact our company.



E-Line Smart STD I equipped with MCB and/or RCBO

Color Options:







Technical Specifications





| Product Description and Visual | - Color | Order Code | Е | nergy Socket | ts | Active Network Components | Passive Network Components |
|--|-----------|-----------------------|---------------------|--------------|-------------------------|------------------------------|-------------------------------|
| SM-STD 1 | COIOI | SM-STD 1 Free Type | Mains (Electricity) | UPS | USB Charging (Type A+C) | Cat6 UTP RJ45 | Face Plate 22,5x45 |
| | | 3404702 | 2 | 2 | | 2 | 2 |
| | | 3404705 | 2 | 2 | 1 | 2 | 2 |
| | | 3404708 | 3 | | 1 | | |
| THE DO DO NOT | Anodized | 3404711 | 4 | | 1 | 2 | 2 |
| E-Long States | Allouizeu | 3404714 | | 4 | 1 | 2 | 2 |
| | | 3404717 | 1 | 2 | | 2 | 2 |
| | | 3404720 | 2 | 3 | | 2 | 2 |
| | | 3404723 | 2 | 3 | 1 | 2 | 2 |
| | | 3404703 | 2 | 2 | | 2 | 2 |
| | | 3404706 | 2 | 2 | 1 | 2 | 2 |
| | | 3404709 | 3 | | 1 | | |
| N: | Smoke | 3404712 | 4 | | 1 | 2 | 2 |
| P. LUTE STORY | Silloke | 3404715 | | 4 | 1 | 2 | 2 |
| | | 3404718 | 1 | 2 | | 2 | 2 |
| | | 3404721 | 2 | 3 | | 2 | 2 |
| | | 3404725 | 2 | 3 | 1 | 2 | 2 |
| | | 3404704 | 2 | 2 | | 2 | 2 |
| | | 3404707 | 2 | 2 | 1 | 2 | 2 |
| | | 3404710 | 3 | | 1 | | |
| | Black | 3404713 | 4 | | 1 | 2 | 2 |
| CUMMUN | DIACK | 3404716 | | 4 | 1 | 2 | 2 |
| A STATE OF THE STA | | 3404719 | 1 | 2 | | 2 | 2 |
| - | | 3404722 | 2 | 3 | | 2 | 2 |
| | | 3404726 | 2 | 3 | 1 | 2 | 2 |

You may specify the desired color, power sockets, low-voltage sockets, and multimedia sockets according to customer requirements. Depending on the customer's request, WAGO brand interlocking or mini terminal can also be selected.



| SM-STD I Product Dimensions | | | | | | | | | |
|-----------------------------|-------------|-----------------|-------|----|----|--|--|--|--|
| Prod | uct Order (| Dimensions (mm) | | | | | | | |
| Anodized | Smoke | Black | Α | В | С | | | | |
| 3404702 | 3404703 | 3404704 | 355 | 60 | 55 | | | | |
| 3404705 | 3404706 | 3404707 | 377,5 | 60 | 55 | | | | |
| 3404708 | 3404709 | 3404710 | 287,5 | 60 | 55 | | | | |
| 3404711 | 3404712 | 3404713 | 377,5 | 60 | 55 | | | | |
| 3404714 | 3404715 | 3404716 | 377,5 | 60 | 55 | | | | |
| 3404717 | 3404718 | 3404719 | 310 | 60 | 55 | | | | |
| 3404720 | 3404721 | 3404722 | 400 | 60 | 55 | | | | |
| 3404723 | 3404725 | 3404726 | 422,5 | 60 | 55 | | | | |



Body: Aluminium

Side Covers: PA6, V2 (Flammability Class), HF (Halogen Free)

Accessories



| Product Image | Module Quantity | Product Description | Order Code |
|------------------|--------------------|--|---------------|
| 1 | <u>-</u> - | UTP Cat-6, RJ45 Keystone Jack, Data, White | 1004334 |
| | | UTP Cat-6, RJ45 Keystone Jack, Data, Black | 1053869 |
| s di | | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, White | 1004337 |
| | - | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, Black | 1053870 |
| | 1 | HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | 1016317 |
| | ' | HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053871 |
| | 1 | USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | |
| | | USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053875 |
| , i | | VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | |
| | | VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053876 |
| 00 | 1 | Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, White | 1004186 |
| | 1 | Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, Black | 1053855 |
| | 1 | Aluminum Blank Cover, 22.5x45mm, Anodised | 2080641 |
| | 1 | Aluminum Blank Cover, 22.5x45mm, Smoke-Coloured | 2117523 |
| T | 1 | Aluminium Blank Cover, 22.5x45mm, Anodised Black | 2080655 |

| Product Image | Module Quantity | Product Description | Order Code |
|------------------|--------------------|--|---------------|
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Single | 1023438 |
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, Black, Single | 1073627 |
| | 4 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Double | 1063258 |
| 999 | 6 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Triple | 1063260 |
| | 2 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Single | 1023439 |
| | 4 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Double | 1063261 |
| | 6 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Triple | 1063263 |
| 11 | 1 | Dual USB Charger Adapter, 2 Port Type A, Input 100- 240V AC, 50-60Hz, Output 5V DC - 2100mA | 1016316 |
| 11 | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1046296 |
| | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1073629 |

Stainless Steel Angled Desk Connector




| Description | Order Code |
|---------------------------------------|---------------|
| Stainless Steel Angled Desk Connector | 2080760 |



Technology and Art Compatible Solutions



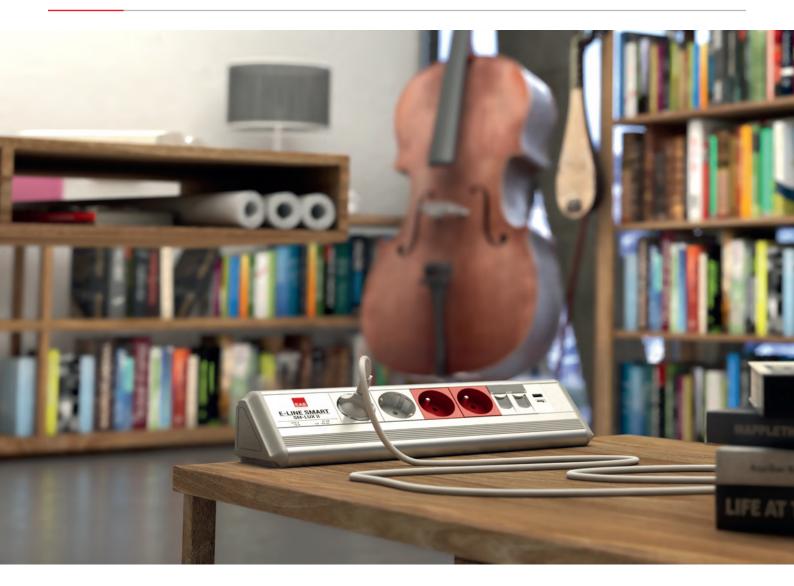









Innovative, Aesthetic and Artistic

- Can be embedded into desks or work surfaces. Rich options for cable entry and termination.
- Product variety provided with aesthetically inconspicuous mounting legs.

Technological and Secure

 All plastic components in our products are made of PA6 raw material, halogen-free, and meet V2 flammability class according to the UL94 standard.



E-LINE SMART SM-LUX I

Luxury Free Standing Type



- It is a modular type and can be equipped with 45° angled sockets, designed with aesthetics and visual appeal in mind for desktop use, suitable for office environments, a bureau-type power strip.
- There are explosion-proof type side covers for cable entries.
- Our standard type products are manufactured with cable retaining clamps and spring terminals.
- · For energy sockets of various brands, as well as active and passive network components, please contact our company directly.
- Products are supplied in protective nylon bags and packaged in cardboard boxes.
- Prices include installation, internal wiring (applicable to energy sockets), and blast type plastic side covers. All cables are halogenfree. For custom cross-sections or special types, please consult our company.



Color Options:





E-LINE SMART SM-LUX II

Luxury Standing Type



- It is a bureau-type power strip designed with aesthetics and visual appeal in mind for desktop use. With its special base design, it can be easily attached to the edge of the desk. It is equipped with modular type and 45° angled sockets, fulfilling the needs of work environments.
- There are explosive-proof type side covers for cable entries.
- Our standard type products are manufactured with cable retaining clamps and spring terminals.
- For energy sockets of various brands, as well as active and passive network components, please contact our company directly.
- Products are supplied in protective nylon bags and packaged in cardboard boxes.
- Prices include installation, internal wiring (applicable to energy sockets), and blast type plastic side covers. All cables are halogen-free. For custom cross-sections or special types, please consult our company.



Color Options:



Technical Specifications




E-Line Smart SM-LUX I Free Type / Smart SM-LUX II Footed Type

| Product Description and Visual | Color | Order Code Energy Sockets | | Active Network Components | Passive Network Components | | |
|--------------------------------|---------|---------------------------|---------------------|------------------------------|-------------------------------|---------------|--------------------|
| SM-LUX II Footed Type | 00101 | SM-LUX II Footed Type | Mains (Electricity) | UPS | USB Charging (Type A+C) | Cat6 UTP RJ45 | Face Plate 22,5x45 |
| | | 3404543 | 2 | 2 | | 2 | 2 |
| | | 3404546 | 2 | 2 | 1 | 2 | 2 |
| C C Tre | | 3404549 | 3 | | 1 | | |
| eville arms | Eloksal | 3404552 | 4 | | 1 | 2 | 2 |
| | LIUKSai | 3404555 | | 4 | 1 | 2 | 2 |
| | | 3404558 | 1 | 2 | | 2 | 2 |
| • | | 3404561 | 2 | 3 | | 2 | 2 |
| | | 3404564 | 2 | 3 | 1 | 2 | 2 |
| | | 3404544 | 2 | 2 | | 2 | 2 |
| _ | | 3404547 | 2 | 2 | 1 | 2 | 2 |
| 0.2 17 | Füme | 3404550 | 3 | | 1 | | |
| 1 and Triple | | 3404553 | 4 | | 1 | 2 | 2 |
| | rume | 3404556 | | 4 | 1 | 2 | 2 |
| | | 3404559 | 1 | 2 | | 2 | 2 |
| | | 3404562 | 2 | 3 | | 2 | 2 |
| | | 3404565 | 2 | 3 | 1 | 2 | 2 |
| | | 3404545 | 2 | 2 | | 2 | 2 |
| _ | | 3404548 | 2 | 2 | 1 | 2 | 2 |
| (C. C.) | | 3404551 | 3 | | 1 | | |
| e-Minist. | Cirrah | 3404554 | 4 | | 1 | 2 | 2 |
| | Siyah | 3404557 | | 4 | 1 | 2 | 2 |
| | | 3404560 | 1 | 2 | | 2 | 2 |
| • | | 3404563 | 2 | 3 | | 2 | 2 |
| | | 3404566 | 2 | 3 | 1 | 2 | 2 |

You may specify the desired color, power sockets, low-voltage sockets, and multimedia sockets according to customer requirements. If the "SM-LUX I Free-Standing Type" model of the above-mentioned products is required, please contact our company.



| SM LUX II Footed Type Product Dimensions | | | | | | | | | |
|--|--------------|-----------------|-------|------|----|--|--|--|--|
| Proc | luct Order 0 | Dimensions (mm) | | | | | | | |
| Anodized | Smoke | Black | Α | В | С | | | | |
| 3404543 | 3404544 | 3404545 | 345 | 67,5 | 96 | | | | |
| 3404546 | 3404547 | 3404548 | 367,5 | 67,5 | 96 | | | | |
| 3404549 | 3404550 | 3404551 | 277,5 | 67,5 | 96 | | | | |
| 3404552 | 3404553 | 3404554 | 367,5 | 67,5 | 96 | | | | |
| 3404555 | 3404556 | 3404557 | 367,5 | 67,5 | 96 | | | | |
| 3404558 | 3404559 | 3404560 | 300 | 67,5 | 96 | | | | |
| 3404561 | 3404562 | 3404563 | 390 | 67,5 | 96 | | | | |
| 3404564 | 3404565 | 3404566 | 412,5 | 67,5 | 96 | | | | |



Body: Aluminium **Side Covers:** PA6, V2 (Flammability Class), HF (Halogen Free)

Note: The dimensions of the SM-LUX II Floor-standing Type product are the same

Accessories



| Product Image | Module Quantity | Product Description | Order Code | | |
|------------------|--------------------|--|---------------|--|--|
| · Co | | UTP Cat-6, RJ45 Keystone Jack, Data, White | | | |
| | - | UTP Cat-6, RJ45 Keystone Jack, Data, Black | 1053869 | | |
| s di | | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, White | 1004337 | | |
| | - | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, Black | 1053870 | | |
| | 1 | HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | 1016317 | | |
| | ' | HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053871 | | |
| | 1 | USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | 1016318 | | |
| | 1 | USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053875 | | |
| 9 5 | 1 | VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White | 1016319 | | |
| 3 6 | | VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black | 1053876 | | |
| 00 | 1 | Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, White | 1004186 | | |
| | 1 | Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, Black | 1053855 | | |
| | 1 | Aluminum Blank Cover, 22.5x45mm, Anodised | 2080641 | | |
| | 1 | Aluminum Blank Cover, 22.5x45mm, Smoke-Coloured | 2117523 | | |
| T | 1 | Aluminium Blank Cover, 22.5x45mm, Anodised Black | 2080655 | | |

| Product Image | Module Quantity | Product Description | Order Code |
|------------------|--------------------|--|---------------|
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Single | 1023438 |
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, Black, Single | 1073627 |
| | 4 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Double | 1063258 |
| 999 | 6 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Triple | 1063260 |
| | 2 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Single | 1023439 |
| • | 4 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Double | 1063261 |
| | 6 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Triple | 1063263 |
| 11 | 1 | Dual USB Charger Adapter, 2 Port Type A, Input 100- 240V AC, 50-60Hz, Output 5V DC - 2100mA | 1016316 |
| 11 | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1046296 |
| | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1073629 |

Adjustable Table Connection Leg



| Description | Order Code |
|---------------------------------------|---------------|
| SM-LUX II Desk Connection Kit (Gray) | 2086359 |
| SM-LUX II Desk Connection Kit (Smoke) | 2086360 |
| SM-LUX II Desk Connection Kit (Black) | 2086361 |

Note: Should be ordered separately if needed. Compatible with the SM-LUX II model.

Desk Fastening Component



Order Code: 3048968

Note: Should be ordered separately if needed. Compatible with the SM-LUX I model.

Please call our company for different brands.



E-LINE SMART SM-IN I

Recessed Rectangular Type



- It is an office plug block designed in a recessed rectangular section, equipped with modular and 45° angled sockets, which are necessary or requested for working environments.
- The cover opens automatically with a single touch, and thanks to its special locking mechanism and brush cover structure, it can also be used while closed.
- Our standard type products are manufactured with cable holder clamps and spring terminals.
- Thanks to specially developed self-positioning side locking clips, installation is easy.
- For energy sockets of various brands, as well as active and passive network components, please contact our company directly.
- Products are supplied in protective nylon bags and packaged in cardboard boxes.
- Prices include installation, internal wiring (applicable to energy sockets), and blast type plastic side covers. All cables are halogen-free. For custom cross-sections or special types, please consult our company.




Color Options:







Technical Specifications







| Product Description and Visual | Color | Order Code | Е | nergy Socke | ts | Active Network Components | Passive Network Components |
|--------------------------------|---------|------------|---------------------|-------------|-------------------------|------------------------------|-------------------------------|
| SM-IN I | COIOI | SM-IN I | Mains (Electricity) | UPS | USB Charging (Type A+C) | Cat6 UTP RJ45 | Face Plate 22,5x45 |
| 4 | | 3404616 | 2 | 2 | | 2 | 2 |
| | | 3404619 | 2 | 2 | 1 | 2 | 2 |
| | | 3404622 | 3 | | 1 | | |
| | Eloksal | 3404625 | 4 | | 1 | 2 | 2 |
| 0.0 | LIUKSai | 3404628 | | 4 | 1 | 2 | 2 |
| | | 3404631 | 1 | 2 | | 2 | 2 |
| 4 | | 3404634 | 2 | 3 | | 2 | 2 |
| | | 3404637 | 2 | 3 | 1 | 2 | 2 |
| | | 3404617 | 2 | 2 | | 2 | 2 |
| | Füme | 3404620 | 2 | 2 | 1 | 2 | 2 |
| | | 3404623 | 3 | | 1 | | |
| TO WELL THE | | 3404626 | 4 | | 1 | 2 | 2 |
| | ruille | 3404629 | | 4 | 1 | 2 | 2 |
| 3 | | 3404632 | 1 | 2 | | 2 | 2 |
| | | 3404635 | 2 | 3 | | 2 | 2 |
| | | 3404638 | 2 | 3 | 1 | 2 | 2 |
| | | 3404618 | 2 | 2 | | 2 | 2 |
| | | 3404621 | 2 | 2 | 1 | 2 | 2 |
| | | 3404624 | 3 | | 1 | | |
| | Siyah | 3404627 | 4 | | 1 | 2 | 2 |
| 1 | Siyaii | 3404630 | | 4 | 1 | 2 | 2 |
| | | 3404633 | 1 | 2 | | 2 | 2 |
| | | 3404636 | 2 | 3 | | 2 | 2 |
| | | 3404639 | 2 | 3 | 1 | 2 | 2 |

You may specify the desired color, power sockets, low-voltage sockets, and multimedia sockets according to customer requirements. Depending on the customer's request, WAGO brand interlocking or mini terminal can also be selected.





| SM IN I Recessed Rectangular Type Product Dimensions | | | | | | | | | |
|--|---------|---------|-----------------|-----|-----|-------|-----|----------------------|-----|
| Product Order Code | | | Dimensions (mm) | | | | | Cutting Dimension | |
| Anodized | Smoke | Black | Α | В | С | D | Е | F | G |
| 3404616 | 3404617 | 3404618 | 357,5 | 120 | 102 | 337,5 | 100 | 340 | 102 |
| 3404619 | 3404620 | 3404621 | 380 | 120 | 102 | 360 | 100 | 362,5 | 102 |
| 3404622 | 3404623 | 3404624 | 290 | 120 | 102 | 270 | 100 | 272,5 | 102 |
| 3404625 | 3404626 | 3404627 | 380 | 120 | 102 | 360 | 100 | 362,5 | 102 |
| 3404628 | 3404629 | 3404630 | 380 | 120 | 102 | 360 | 100 | 362,5 | 102 |
| 3404631 | 3404632 | 3404633 | 312,5 | 120 | 102 | 292,5 | 100 | 295 | 102 |
| 3404634 | 3404635 | 3404636 | 402,5 | 120 | 102 | 382,5 | 100 | 385 | 102 |
| 3404637 | 3404638 | 3404639 | 425 | 120 | 102 | 405 | 100 | 407,5 | 102 |



Note: Furniture should not be cut before an order is placed.

Body: Aluminium

Side Covers: PA6, V2 (Flammability Class),

HF (Halogen Free)

The number indicated under the "Module" column in the table above refers to the total number of modules to be used within the product.

Accessories



| Product Image | Module Quantity | Product Description | Order Code |
|------------------|--------------------|---|---------------|
| | | UTP Cat-6, RJ45 Keystone Jack, Data, White | 1004334 |
| All I | - | UTP Cat-6, RJ45 Keystone Jack, Data, White UTP Cat-6, RJ45 Keystone Jack, Data, Black Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, White Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, Black HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparen Cover Label Space, White Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparen Cover Label Space, Black Aluminum Blank Cover, 22.5x45mm, Anodised | 1053869 |
| | | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, White | 1004337 |
| 4000 | | Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, Black | 1053870 |
| | 1 | Female - Female, 90 Degree, | 1016317 |
| | , | UTP Cat-6, RJ45 Keystone Jack, Data, White UTP Cat-6, RJ45 Keystone Jack, Data, Black Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, White Cat-3, Rj11, 4 Contact, Keystone Jack, Telephone, Black HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White HDMI Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black USB 3.0 Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black USB Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed White VGA Adapter, 22,5x45 mm Female - Female, 90 Degree, Screwed Black UX Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, White Lux Model Faceplate, Spring Loaded, 22,5x45mm Transparent Cover Label Space, Black Aluminum Blank Cover, Aluminum Blank Cover, | 1053871 |
| | 1 | Female - Female, 90 Degree, | 1016318 |
| | • | Female - Female, 90 Degree, | 1053875 |
| 5 1 5 | | Female - Female, 90 Degree, | 1016319 |
| | 1 | Female - Female, 90 Degree, | 1053876 |
| 00 | 1 | Loaded, 22,5x45mm Transparent | 1004186 |
| | 1 | Loaded, 22,5x45mm Transparent | 1053855 |
| | 1 | | 2080641 |
| | 1 | Aluminum Blank Cover, 22.5x45mm, Smoke-Coloured | 2117523 |
| | 1 | | 2080655 |

| Product Image | Module Quantity | Product Description | Order Code |
|------------------|--------------------|--|---------------|
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Single | 1023438 |
| | 2 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, Black, Single | 1073627 |
| 99 | 4 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Double | 1063258 |
| 999 | 6 | Modular Grounded Socket, German Standard 45x45mm, 45° Degree, Child-Proof, White, Triple | 1063260 |
| | 2 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Single | 1023439 |
| | 4 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Double | 1063261 |
| | 6 | Modular Grounded Outlet (UPS), French Standard 45x45mm, 45° Degree, Child- Proof, Red, Triple | 1063263 |
| 11 | 1 | Dual USB Charger Adapter, 2 Port Type A, Input 100- 240V AC, 50-60Hz, Output 5V DC - 2100mA | 1016316 |
| 11 | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1046296 |
| | 1 | Dual USB Charger Adapter, 1 Port Type A, 1 Port Type C, Input 100-240V AC, 50-60Hz, Output 5V DC - 2100mA | 1073629 |

E-LINE SMART SM-STD I

Free-Standing Wired Type (3m with Plug)



- It can be securely fixed with screws when needed in rectangular prism structure for desk usage or wall-mounted surface applications.
- In desktop or wall-mounted applications, it comes as a version with a 3-meter power cable attached to the socket block.
- Equipped with mains, UPS, sockets, and USB charging output accessories.
- The built-in on/off button allows controlling the power of connected devices with a single press.
- Products are delivered in nylon bags and cardboard box packaging.
- Prices include installation, internal wiring (applicable to energy sockets), and blast type plastic side covers. All cables are halogen free.





Color Options:





Technical Specifications





| Product Description and Visual | Color | Order Code | Energy Sockets | Active Network Components | Switch (45x45mm) | 3m Cable (Cable Cross- | |
|--------------------------------|--|---------------|------------------------|------------------------------|---------------------|------------------------------|--|
| Wired SM-STD I | Color | | Mains (Electricity) | USB Type A+C Charging | | Section 1.5 mm²) | |
| | | 3405482 | 3 | х | х | (Cable Cross- Section 1.5 | |
| | Anodized Anodized Anodized 3405483 5 x 3405486 3 3405487 5 3409143 3 x 3409150 5 x 3409147 3 ✓ | х | ✓ | | | | |
| 3 | | ✓ | х | ✓ | | | |
| | | 3405487 | 5 | ✓ | х | ✓ | |
| | | 3409143 | 3 | х | ✓ | ✓ | |
| | | 3409150 | 5 | х | ✓ | ✓ | |
| | | 3409147 | 3 | ✓ | ✓ | ✓ | |
| | | 3409146 | 5 | ✓ | ✓ | ✓ | |
| | | 3405484 | 3 | х | х | ✓ | |
| | | 3405485 | 5 | х | х | | |
| | | 3405488 | 3 | ✓ | х | | |
| | Dl. d. | 3405489 | 5 | ✓ | х | ✓ | |
| | ыаск | Black 3409145 | 3 | х | ✓ | ✓ | |
| | | 3409144 | 5 | х | ✓ | ✓ | |
| | | 3409149 | 3 | ✓ | ✓ | ✓ | |
| | | 3409148 | 5 | ✓ | ✓ | ✓ | |

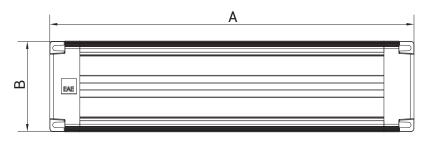




Body: Aluminium **Side Covers:** PA6, V2 (Flammability Class), HF (Halogen Free)

| Wired SM-STD I Product Dimensions | | | | | | | |
|-----------------------------------|------------|-----------------|----|----|--|--|--|
| Product C | Order Code | Dimensions (mm) | | | | | |
| Anodized | Black | A | В | С | | | |
| 3405482 | 3405484 | 175 | 60 | 55 | | | |
| 3405483 | 3405485 | 265 | 60 | 55 | | | |
| 3405486 | 3405488 | 197,5 | 60 | 55 | | | |
| 3405487 | 3405489 | 287,5 | 60 | 55 | | | |
| 3409143 | 3409145 | 220 | 60 | 55 | | | |
| 3409150 | 3409144 | 310 | 60 | 55 | | | |
| 3409147 | 3409149 | 242,5 | 60 | 55 | | | |
| 3409146 | 3409148 | 332,5 | 60 | 55 | | | |

Technical Specifications and Order Codes





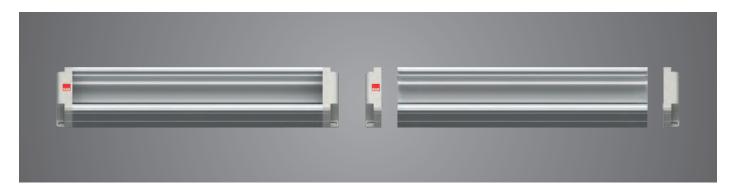

EXPLANATION

- 1. Assembled in 8 different sizes ranging from 6 modules to 20 modules, empty, as standard. You can also wire it yourself with the necessary number and type of socket assembly according to your needs.
- 2. The product is manufactured and sold as an unassembled empty case. As socket assembly and wiring, as well as electrical testing, are not conducted by us, our company will not be responsible for any malfunction in case of such issues.
- 3. "Halogen free" feature PA6 side panels, suitable for the body structure and equipped with knock-out holes for cable entries, are provided as standard with the product. Additionally, the product includes screw-type cable retaining clips inside the body and a grounding terminal mounted on the body.
- 4. In addition to the standard sizes listed, custom manufacturing in different sizes can be provided upon request and need. Please contact our company for further information.
- 5. The structure and dimensions are suitable for the assembly of modular type 45x45 mm or 22.5x45 mm mains and UPS power sockets, as well as telephone, data, USB, HDMI, and VGA multimedia sockets. However, it's important to note that the socket height and fitting details may vary and may not be compatible with all brands. Please contact our company before placing an order to discuss this matter.



E-Line Smart SM-STD B / Standard Empty Type

| Product Description and Visual | Color | Order Code | Capacity | Product Dimensions | | | |
|--------------------------------|------------|------------|----------|--------------------|----|----|--|
| Floduct Description and Visual | | | (Module) | Α | В | С | |
| | | 3178192 | 6 | 175 | 60 | 55 | |
| | | 3178193 | 8 | 220 | 60 | 55 | |
| | | 3178194 | 10 | 265 | 60 | 55 | |
| | Anodized | 3178195 | 12 | 310 | 60 | 55 | |
| | Allouizeu | 3178196 | 14 | 355 | 60 | 55 | |
| | 3178197 16 | 16 | 400 | 60 | 55 | | |
| | | 3178198 | 18 | 445 | 60 | 55 | |
| | | 3178199 | 20 | 490 | 60 | 55 | |
| | | 3290894 | 6 | 175 | 60 | 55 | |
| | | 3290895 | 8 | 220 | 60 | 55 | |
| | | 3290890 | 10 | 265 | 60 | 55 | |
| | Smoke | 3290896 | 12 | 310 | 60 | 55 | |
| | Smoke | 3290891 | 14 | 355 | 60 | 55 | |
| • | | 3290897 | 16 | 400 | 60 | 55 | |
| | | 3290892 | 18 | 445 | 60 | 55 | |
| | | 3290893 | 20 | 490 | 60 | 55 | |
| | | 3179219 | 6 | 175 | 60 | 55 | |
| | | 3179220 | 8 | 220 | 60 | 55 | |
| | | 3179221 | 10 | 265 | 60 | 55 | |
| | Black | 3179222 | 12 | 310 | 60 | 55 | |
| II | DIACK | 3179223 | 14 | 355 | 60 | 55 | |
| | | 3179224 | 16 | 400 | 60 | 55 | |
| | | 3179225 | 18 | 445 | 60 | 55 | |
| | | 3179226 | 20 | 490 | 60 | 55 | |

SM-Flex Spine Tray and Order Codes






| SM-FLEX Spine Tray | | | | | | |
|------------------------------------|--------------------|---------|--|--|--|--|
| Description | Product Order Code | | | | | |
| Description | Gray | Smoke | | | | |
| SM-FLEX Spine Tray Cable Organizer | 5000363 | 5001022 | | | | |

- For routing power, low-voltage, and multimedia cables from the floor to desks or workspaces;
- Flexible and aesthetic solution
- PA6 material, V2 (Flame Retardant Class), HF (Halogen Free) feature manufactured with PA6 material
- Standard Size = 750 mm



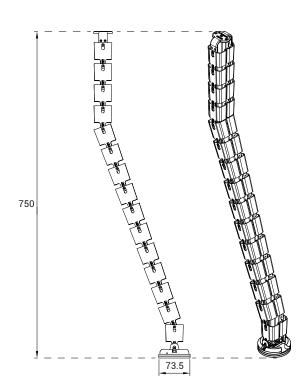

General Product Structure and Features



Equipped Office Socket Blocks

- 1. The body is made of aluminum material and painted with alternatives of Anodized or electrostatic powder coating system in smoke and black colors.
- 2. Side plastic covers are made of (PA6) material, providing compliance with "halogen-free" and meeting the 960°C hot wire (glow wire) test conditions according to IEC 60965 standard, classified as "V2" flame resistance class according to UL94 standard.
- 3. Standard free-standing products can be fixed to the table with appropriate feet already attached when necessary.
- 4. Standard free-standing products can be screwed into the table inside and/or underneath through the screw holes on the side covers when necessary.
- 5. Recessed type products' covers are opened and closed with a push-lock (push-open push-close) system, and the covers can be opened up to a maximum of 90° to prevent breakage. The cable entry and exit points of the cover are brush structured, and the brushes are made of PA6 material. When any type of plug or adapter is plugged into the sockets, the covers can easily close. The product is designed to be a maximum of 2mm above the table surface when the cover is closed.
- 6. Standard products that can be fixed to the table are positioned at a certain angle for ease of use, and there is a movable cover plate on the back of the product that covers and protects the cable entry and exit points in a body-compliant manner.
- 7. The product contains terminal connection apparatus both inside and in a separate compartment, featuring screwless terminal blocks for each conductor with a push-in type connection. Additionally, this terminal apparatus is equipped with a cable compression clip to withstand pulling and tensile loads on the cables.
- 8. The connection of the power sockets mounted on the product is made with H07Z1-K type cable with a cross-section of 2.5 mm² or optionally 1.5 mm², and it is equipped with terminals capable of carrying at least 16A load for screwless push-in type connections, separately for UPS and Mains circuits.
- 9. The grounding contact screw and grounding terminal, fixed to the Aluminum body of the product, are connected with H07Z1-K type cable with a cross-section of 2.5 mm² to ensure body protection.
- 10. The socket mounting section is integrated with the body and designed to accommodate power sockets of any brand, as well as universal and modular type sockets, with dimensions of 45x45 mm (2 modules) for power sockets and 45x22.5 mm (1 module) for low-current and multimedia socket mounting.
- 11. The mains and UPS sockets are 250V AC, 16A, with a 45° angled design and a snap-in structure. The sockets used in the mains circuit are "white" in color and grounded according to the German standard, while the sockets used in the UPS circuit are "red" in color and grounded according to the French standard.
- 12. For data cable connections, spring-loaded and labeled "face plates" suitable for Cat-6 UTP keystone jack structure are used.
- 13. For telephone cable connections, spring-loaded and labeled "face plates" suitable for Cat-3 keystone jack structure are used.
- 14. The socket mounting section is also designed to accommodate various standard and modular USB chargers, USB adapters, VGA adapters, HDMI adapters, etc. (45x45 and/or 45x22.5 mm), and it can be used with products of any brand.
- 15. Between the strong and weak current sockets inside the product, as well as after the last socket, blind covers compatible with the body of 45x22.5 mm (1 module) size are used before the termination cover.
- 16. For cable outlets on the desk, flexible and "halogen-free" cable organizer and protective plastic spine channels are used.

Declaration



CE DECLARATION OF CONFORMITY

Product Group E-LINE SMART Modular Power Outlet Blocks

Manufacturer EAE Elektrik Asansor End. Inşaat San. ve Tic. A.S.

Akcaburgaz Mahallesi, 3114. Sokak, No:10, 34522 Esenyurt - İstanbul

We confirm the compliance of the product or product group specified above, which is produced in EAE Facilities, with the standards and regulations listed below.

Standard:

IEC 60670-1

Boxes and enclosures for electrical accessories for household and similar fixed electrical installations - Part 1: General requirements

CE - Directive:

Low Voltage Directive 2014/35/EU

Technical Documentation Preparation Authority

EAE Elektrik Asansor End. Inşaat San. ve Tic. A.S. Akcaburgaz Mahallesi, 3114. Sokak, No:10, 34522 Esenyurt - İstanbul

Mustafa AKCELIK

Date

08/03/2025

Document Signing Authority

Elif Gamze KAYA OK Deputy General Manager

Certificate



Zertifikat

Certificate



Zertifikat Nr. Certificate No.

Blatt Sheet

R 60169731

0001

Ihr Zeichen Client Reference

Unser Zeichen Our Reference

Ausstellungsdatum

Date of Issue

0001-I.Ü.-TR23MV7U 001 03.08.2023

(day/mo/yr)

Genehmigungsinhaber License Holder

EAE ELEKTRİK ASANSÖR END.İNŞAAT SAN.

VE TİC.A.Ş.

Makine İhtisas Organize Sanayi 41455 Kocaeli

Türkiye

Fertigungsstätte Manufacturing Plant

EAE ELEKTRİK ASANSÖR END.İNŞAAT SAN.

VE TIC.A.Ş.

Makine İhtisas Organize Sanayi Bölgesi 6.cadde No:6 Demircíler Köyü Bölgesi 6.cadde No:6 Demircíler Köyü

41455 Kocaeli Türkiye

Prüfzeichen Test Mark



Geprüft nach Tested acc. to

IEC 60670-1:2015

Zertifiziertes Produkt (Geräteidentifikation) Certified Product (Product Identification) Lizenzentgelte - Einheit License Fee - Unit

Connecting box without fixing (Empty boxes for electrical accessories-Flush Type)

Type Designation: SM-A-CDE

A: IN1, DEC5 C: F, G, S

D: 06M, 07M, 08M, 09M, 10M, 11M, 12M, 13M 14M, 15M, 16M, 17M, 18M, 19M, 20M

E: 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16

17,18,19,20,21,22,23,24 Trademark: EAE

See test report for further details This certificate replaces R 60157750 0001.

5

1

1

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestäutgt die Kontor des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht. This certificate is based on our Testing and Certification Regulation and states the of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.

TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg

http://www.tuv.com/safety E-mail: markcheck@tuv.com Fax: +49 221 806-3935

Zertifizierungsstelle

Paulus Hou

Certificate



Zertifikat

Certificate



Zertifikat Nr. Certificate No.

Blatt Sheet

R 60169751

0001

Ihr Zeichen Client Reference

Unser Zeichen Our Reference

Ausstellungsdatum

Date of Issue

0001-I.Ü.-TR233YJ3 001 03.08.2023

(day/mo/yr)

Genehmigungsinhaber License Holder

EAE ELEKTRİK ASANSÖR END. İNŞAAT SAN.

VE TIC.A.Ş.

Makine İhtisas Organize Sanayi

41455 Kocaeli Türkiye

Fertigungsstätte Manufacturing Plant

EAE ELEKTRİK ASANSÖR END. İNŞAAT SAN.

VE TIC.A.Ş.

Makine İhtisas Organize Sanayi Bölgesi 6.cadde No:6 Demircíler Köyü Bölgesi 6.cadde No:6 Demircíler Köyü

41455 Kocaeli Türkiye

Prüfzeichen Test Mark



Type Approved Safety Regular Production Surveillance

www.tuv.com ID 1111267868

Geprüft nach Tested acc. to

IEC 60670-1:2015

Zertifiziertes Produkt (Geräteidentifikation) (Product Identification) Certified Product

Lizenzentgelte - Einheit License Fee - Unit

Connecting box without fixing (Empty boxes for electrical accessories-Surface Type)

Type Designation:

SM-A-CDE

A: STD1, STD2, LUX1, LUX2, STDB DEC1, DEC2

DEC6, DEC7

C: F,G,S

D: 06M, 07M, 08M, 09M, 10M, 11M, 12M, 13M, 14M

15M, 16M, 17M, 18M, 19M, 20M

E: 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15

16,17,18,19,20,21,22,23,24

Trademark: EAE

See test report for further details.

This certificate replaces R 60157751 0001.

9

5

1

1

Dem Zertifikat liegt unsere Prüf- und Zertifizierungsordnung zugrunde und es bestäutgt die Kontor des Produktes mit den oben genannten Standards und Prüfgrundlagen. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich betrachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht. This certificate is based on our Testing and Certification Regulation and states the of the product with the standards and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subject to surveillance.

TÜV Rheinland LGA Products GmbH, Tillystraße 2, 90431 Nürnberg


http://www.tuv.com/safety E-mail: markcheck@tuv.com Fax: +49 221 806-3935

Zertifizierungsstelle

Paulus Hou

Notes



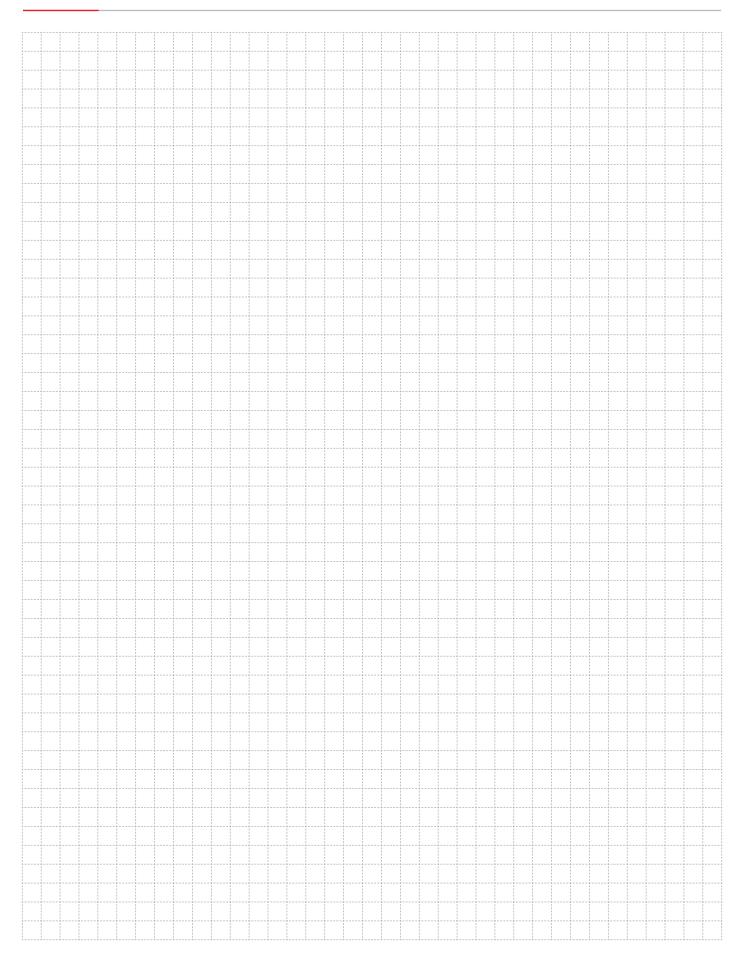

SUSTAINABLE FUTURE

Sustainability Management at EAE Elektrik



As part of our goal to support sustainable development and green transformation, measuring, evaluating, and managing all economic, environmental, and social impacts resulting from our sustainability practices is a key governance priority for EAE Elektrik. We act with great care in analyzing, monitoring, and managing the economic, environmental, and social impacts and risks that arise throughout our value chain in both our national and global operations.





EAE Elektrik

Head Office

Akcaburgaz Mahallesi, 3114. Sokak, No: 10 34522 Esenyurt - Istanbul - Turkiye Tel: +90 (212) 866 20 00 Fax: +90 (212) 886 24 20

EAE DL 4 Factory

Busbar 2

Organize Sanayi Bolgesi Mahallesi, 6. Cadde, No: 14/10, 41455 Dilovasi - Kocaeli - Turkiye Tel: +90 (262) 999 05 55 Fax: +90 (262) 502 01 45





